

AQUATICLEAR

# Kasco<sup>®</sup>

MOVING WATER FORWARD, SINCE 1968



## AQUATICLEAR

This clog resistant circulator produces continuous water movement to keep docks, marinas, canals, shorelines and other targeted areas clear of weeds, algae and other debris. With our revolutionary Clean Current Technology (patent pending), AquaticClear features a crown-like composite prop guard that ensures maintenance-free, continuous operation.

[kascomarine.com](http://kascomarine.com)




Contact us today to learn more | 715.262.4488 | [sales@kascomarine.com](mailto:sales@kascomarine.com)

## MOUNTING OPTIONS


### HORIZONTAL FLOAT

The Horizontal Float Kit uses three ropes to secure AquatiClear™ to the shore at the water's surface. Installation is even easier with the newly designed tie-down loops. Choose from three angles of orientation to create a flow of water in the desired direction.

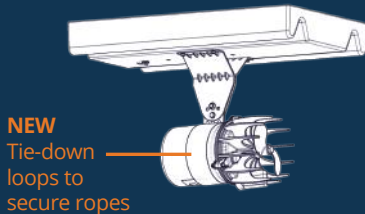

### UNIVERSAL MOUNT

The Universal Mount Kit allows AquatiClear™ units to be easily mounted to structures like a dock. Easily adjust unit angle and depth, and now rotation, using the newly designed Simple Swivel bracket (patent pending).



## POWERFUL MIXING

Using a 3/4HP unit and in just 30 minutes, dye is completely mixed throughout this 6 ft. deep, 800,000 gallon pond.

### BEFORE MIXING



### AFTER MIXING



## AQUATICLEAR

- 120V and 208-240V options
- Built with long lasting internal components
- External metal and hardware are stainless steel and protected by a sacrificial anode
- Complete packages are ETL Listed to UL and CSA standards
- Includes motor unit, power cord, mounting option and optional control panel



**HP** 1/2, 3/4 & 1HP AVAILABLE



## CLEAN CURRENT TECHNOLOGY



Revolutionary crown-like prop guard prevents weeds, algae and other floating debris from clogging. AquatiClear is allowed to run continuously, creating clean and beautiful waterfronts.

MODEL	SIZE (HP)	VOLT(V)	PHASE	AMPS	THRUST (LBS)	OPTIONAL CONTROL PANEL
UNIT ONLY PACKAGES - NO MOUNT						
2400C	1/2	120	1	5.4	30	C-25
3400C	3/4	120	1	6.6	36	C-25
3400HC	3/4	208-240	1	3.1	36	C-220
4400C	1	120	1	9.1	41	C-25
4400HC	1	208-240	1	4.5	41	C-220
HORIZONTAL FLOAT PACKAGES						
2400CFM	1/2	120	1	5.4	30	C-25
3400CFM	3/4	120	1	6.6	36	C-25
3400HCFM	3/4	208-240	1	3.1	36	C-220
4400CFM	1	120	1	9.1	41	C-25
4400HCFM	1	208-240	1	4.5	41	C-220
UNIVERSAL MOUNT PACKAGES (CUSTOMER MUST SUPPLY PIPE)						
2400CDM	1/2	120	1	5.4	30	C-25
3400CDM	3/4	120	1	6.6	36	C-25
3400HCDM	3/4	208-240	1	3.1	36	C-220
4400CDM	1	120	1	9.1	41	C-25
4400HCDM	1	208-240	1	4.5	41	C-220

#### Product Notes:

1. "C" models offer 25 ft., 50 ft., 100 ft., 150 ft., and 200 ft. cord length options. 25. ft. not available for 1HP "C" models.
2. "HC" models offer 50 ft., 100 ft., 150 ft., 200 ft., 250 ft., 300 ft., and 400 ft. cord length options.
3. Optional control panels allow timing to be managed from shore.
4. Double-mechanical seal and stainless steel domed top available.
5. Kasco recommends placing motor unit at least 2 ft. below the surface of the water to prevent audible unit ventilation.
6. Do not install too close to the bottom of the water body. Improper placement can disturb bottom sediment. Check local regulations.