




## No-Icer Slinger Model

We at Scott Aerator thank you for your purchase. It is our goal to ensure that you are completely satisfied with your new No-Icer and that it continues to operate smoothly for many years to come. Please take a few moments to read through this document for proper assembly, installation and maintenance to maximize the operating life of the unit.

The Scott slinger style No-Icer can be suspended from a boat, pilings or dock by utilizing nylon ropes (included) to fasten. For the best results, position the unit 12" below the water's surface and angled upward at 45°. Utilizing a three-point securement, the Slinger No-Icer easily adjusts to compensate for varying water levels, and its heavy duty design is perfect for fresh and salt waters. The unique design allows for use in hard-to-reach areas and for rapidly changing conditions.

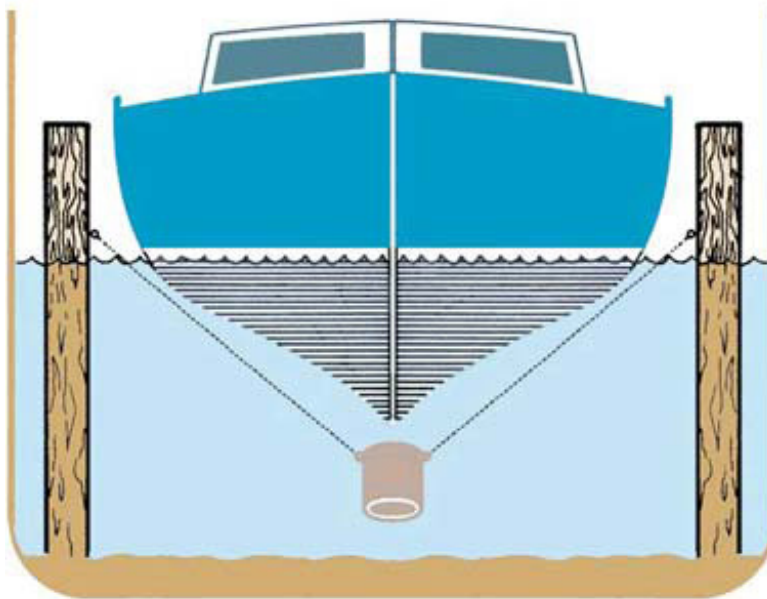

 **Always use a GFCI**  
**Always disconnect the power**  
**when swimmers are present**

 **Do NOT use an extension cord**  
**to supply power to the motor**

## Maintaining your No-Icer Slinger Model

Most of our products require very little to any maintenance. Under normal operating conditions, you should enjoy many years of trouble free service from the unit. As a rule of thumb, the propeller assembly on our No-Icer should be changed every five years. This is a simple procedure that can be done on-site. When the unit is removed from the water for the propeller switch, it would be a good opportunity to wash the unit down with high pressure water. Once the unit is clean, a visual inspection of the entire No-Icer is recommended to be certain nothing is restricting water flow.



Propeller  
Part # 30004

## Standard Features

- PVC and American made stainless steel components for all-weather performance
- Moves 400 gallons per minute
- Oil free motor Motor: 115 Volt 60 HZ, single phase, 10 amps, 680 watts, 3,450 rpms
- 12 gauge submersible power cord, 25 feet included, capped by a rugged Hubbell marine style plug

## Options and Accessories

- 230 volt models available
- Three phase power available
- 50Hz models available
- Longer power cords available

### Thermostat (optional accessory)

Save money on your electric bill! Introducing our De-Icer In-Line Thermostat. This outdoor, heavy duty thermostat control box allows you to set and forget your De-Icer to run when temperatures get frigid. Factory set at an outside air temperature of 30 degrees Fahrenheit, the thermostat automatically starts your De-Icer and keeps it running until the air temp warms to 31 degrees F, or higher. Fully adjustable from 0 F up to 80 F, this product is UL listed. The impact resistant enclosure and 8 foot power cord both come standard, simply plug your De-Icer in and you're ready to go.



Thermostat  
Part # 20042

## The Scott Aerator Awesome Warranty

All standard Scott Aerator products are unconditionally warranted for five years against motor defects in materials or workmanship, under normal operating conditions. All other product components are warranted for one year from date of purchase. Scott Aerator will repair or replace failed parts under warranty when the defective unit is returned to the factory, shipping prepaid, and factory inspection establishes that the part was defective. The unit must be returned to the factory prior to shipment of replacement parts. All parts replaced under this warranty will be returned with shipping prepaid. Scott Aerator will not be liable for consequential damage nor for any costs associated with removal or attempts to repair components in the field.



13245 Barry Street, Holland, MI 49424

scottaerator.com

information@scottaerator.com

800-WATER-45 (800-928-3745)

(616) 392-8882

