

DCF-6 User Manual



SPECIFICATION

Name	6 Door Coin Operated Phone Charging Locker
Model	DCF-6
Lock type	Fingerprint and digital code lock
Overall Dimension	H590*W420*D120mm
Cell Dimension	H70*W230*D80mm
Net Weight	17kgs
Usage	iPhone series, android phone and other micro USB phones
Charger	Lightning, micro USB and type C
Material	Cold Rolled Steel Plate
Color	Black/Customized
Structure	Overall Welding
Steel Plate Thickness	0.6-0.8mm
Type	Electric
Input	AC 110V-240V (adjustable)
Output	DC 5~12V, 1-3A
Certificate	CE,ROHS,FCC
Packing	Carton+Wooden Case
Allow Coin Diameter	18~29mm
Allow Coin Thickness	1.2~3.0mm

SET COIN ACCEPTOR BEFORE FIRST USING

Coin Acceptor Standard Body View



>Adjust Open-Close button to 'NO'(normal open).

>Adjust Fast,Medium,Slow button to 'Middle'.

>Adjust sensitive button to the 'NOM' position.

(These three buttons were set in right position before machine leaving factory)

1.Adjust the setting button to the 'SET' position, enter programming mode.

2.Long press the Coin-value setting button until you hear a 'BI' sound then LED display show '00'.this mean all the coin value setting is erased.

3.Set charging time. Press the Coin-value setting button to adjust charging time. If you press once, LED display will show '01', it means charging time is 20 minutes; if you press twice, LED display will show '02', it means charging time is 40 minutes.

4.Try to find several same value coins which are old and new as much as possible, insert them to coin acceptor in turn, stop when you hear a 'BI' sound.

5.Adjust the setting button to 'START' position, exiting programming mode.

INSTRUCTIONS





-Charge Phone

1. Press 'Store' button ;
2. Input one coin (or several coins) into coin acceptor;
3. Enter fingerprint or 6 digits password, then door will be open;
4. Connect phone with charge cable and close door, then charging starts;

-Take Phone


1. Press 'Take' button;
2. Enter door number in LED display;
3. Enter fingerprint or 6 digits password, then door will be open;
4. Unplug phone and close door, operation completes.

WALL MOUNT INSTALLATION

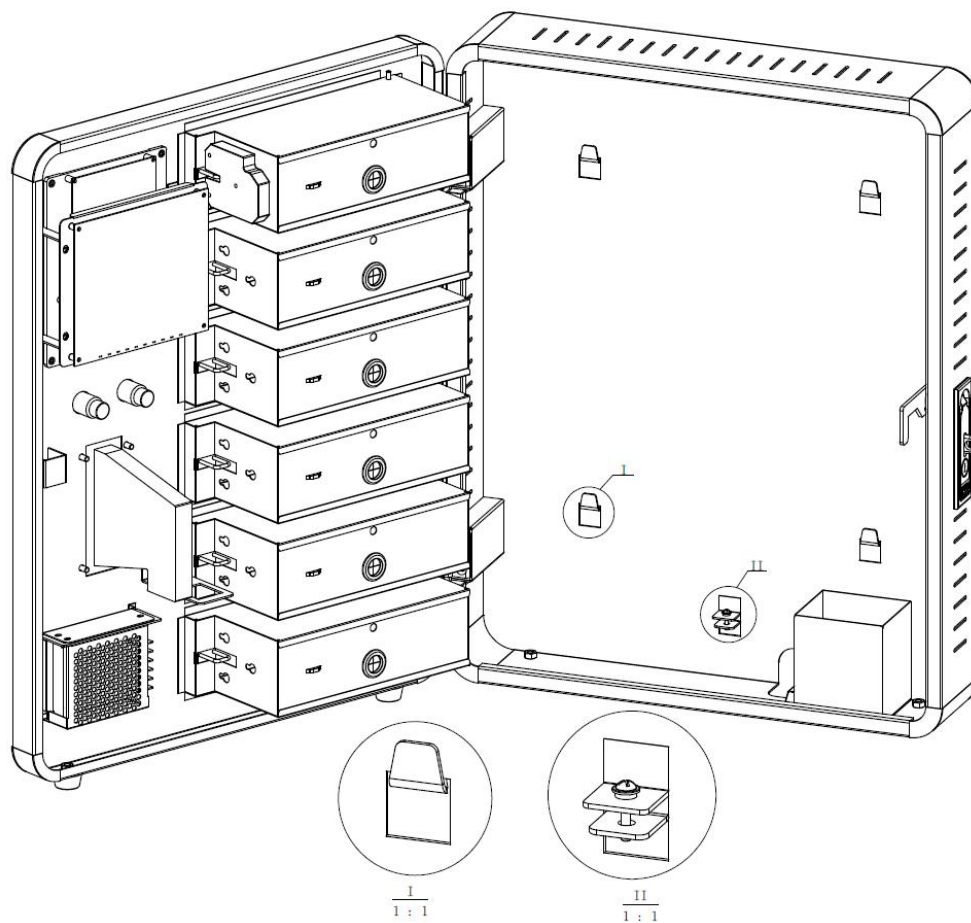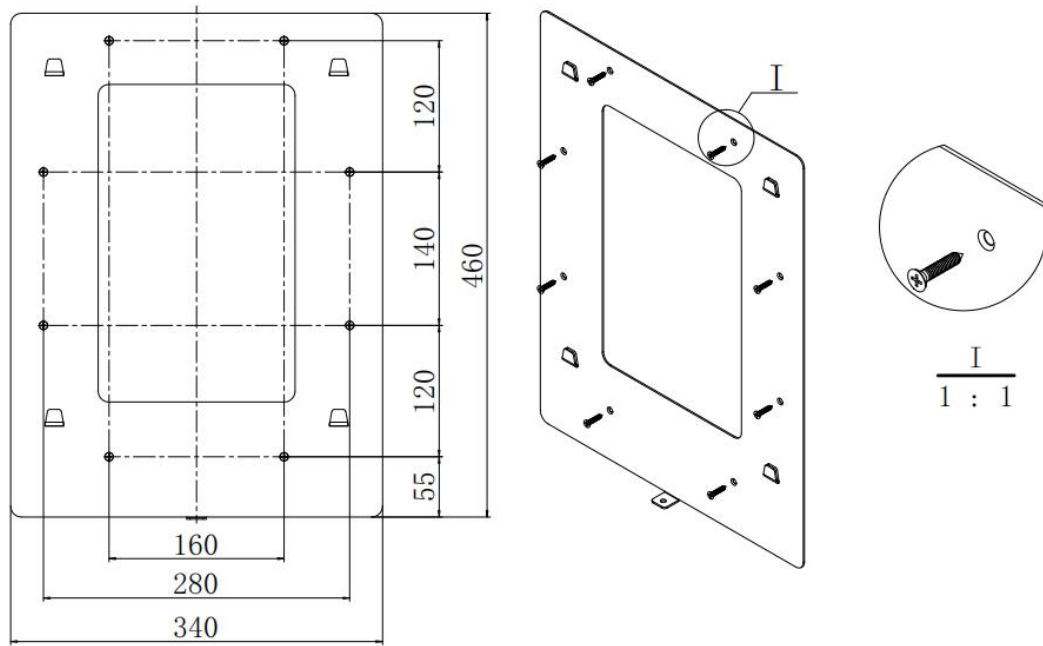

1. Fix the mounting board on the wall with screws;
2. Hang the machine on the mounting board.

EMERGENCY

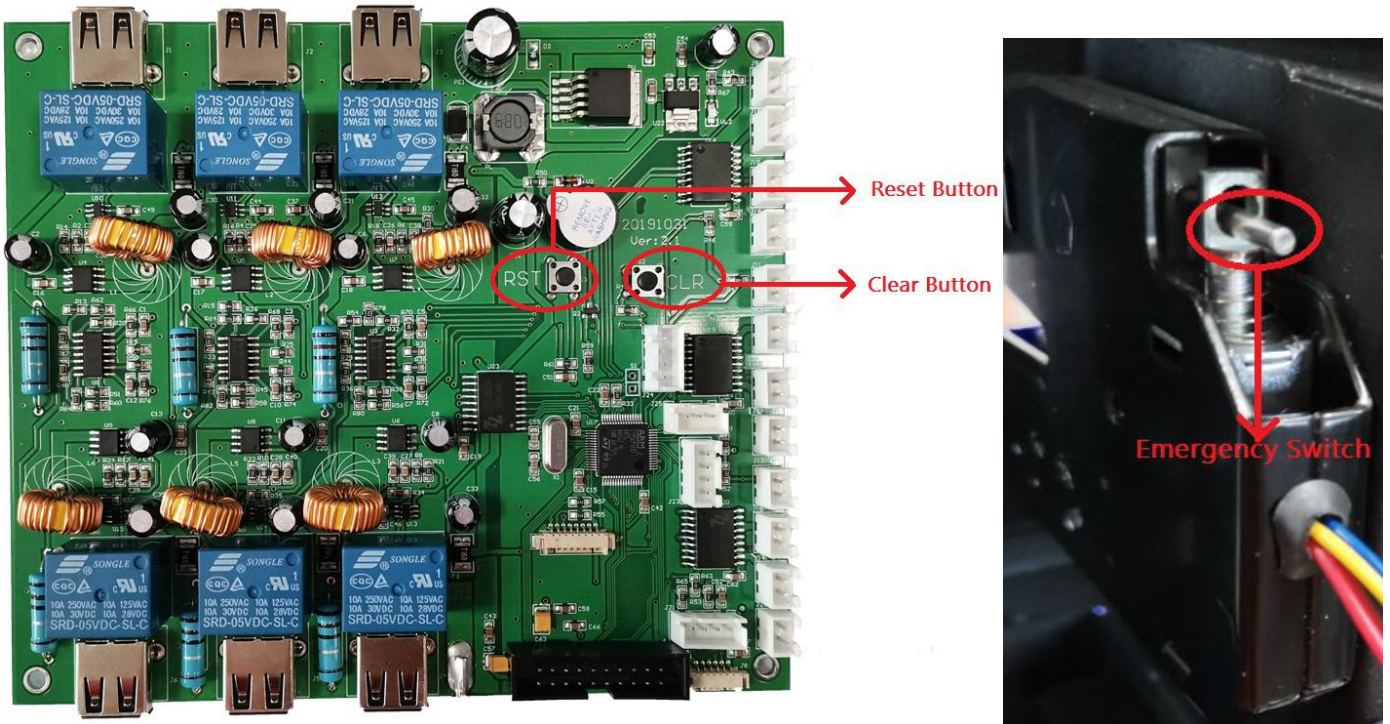

1. When out of power:

Press emergency switch of charge box from back maintenance part.

2. When forgetting password or fingerprint can't be recognized:

Press emergency switch or clear button in circuit board.

3. When system of charging station fail:

Press reset button in circuit board.