


User Manual **6" Smart Slim Selectable Nightlight**

SKU: DL_SL6_S_NL-WH-2750K













Whats in the Box?

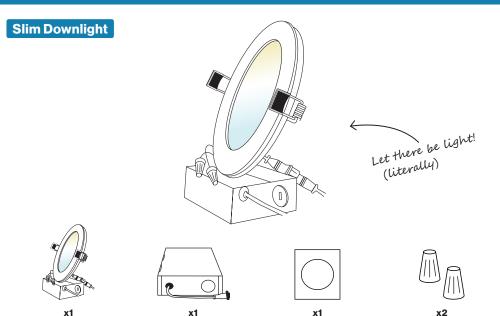





Light Fixture



Junction Box



Installation Template



Wire Nuts

Tape Hole Saw

Ladder

Wire Strippers

Before You Start

Safety Information

To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
- This product should be installed by a person familiar with the construction and operation of the product the hazards involved. Safety eyeglasses and gloves are recommended.
- · Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Do not alter, relocate, or remove wiring during installation.
- Do not make or alter any open holes in wiring enclosure or electrical components during installation.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- · Keep fixture away from corrosive substances.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1.) This device may not cause harmful interference.

- Suitable for damp locations at temperature ranging from 4°F to 113°F. Not for use where directly exposed to water.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.
- This product is not compatible with 3rd party sensors.
- This product is not compatible with photo controls.
- This product is not compatible with occupancy sensors.
- This product is not compatible with timing devices.



 This device must accept any interference that may cause undesired operation. Please review all instructions carefully prior to installation.

Quickstart Guide




Step 1

Use template to cut hole.




Step 2

Connect supply & junction wires.



Step 3


Attach fixture to junction box.



Step 4


Insert fixture into ceiling.

Installation Guide




STEP 1

- a. Turn off circuit breaker before installation.
- b. Cut out 6.33" housing size on Installation Template, then tape onto ceiling in desired location.
- c. Cut ceiling hole using Installation Template as a guide.



STEP 2


a. Open junction box and remove appropriate knockout.



STEP 3

- a. Connect supply and junction wires using wire nuts:
- -Black to Black (Live)
- -White to White (Neutral)
- b. Tuck connected wires inside junction box & close cover.

Installation Guide (Cont.)




STEP 4

Note: This step applies exclusively to the Selectable Slims.

Slide the CCT Switch to choose from 5 color temperatures. Insert junction box through ceiling hole.

New Construction: Secure to studs, joists, or similar fixed structural units.

Remodel: Do not require to secure to studs, joists, or similar fixed units.



STEP 5

a. Attach fixture to junction box using connector as shown on image (1). Tighten connector by hand (2).

b. Push up spring clips and insert fixture into ceiling. Turn on circuit breaker and begin pairing.



STEP 6

Note: Enter pairing mode by turning wall switch off/on 5 times.

Use the Sunco App to pair device, select preferred color temperature and activate night light mode.

Product Details

Install Sunco Smart App

Install Sunco Smart Lighting App. Search for "Sunco Smart Lighting".

Register Your Account

Register using your mobile phone number or email address to receive a verification code and press next. Enter verification code and press next. Create password for your account and press next.

Adding Lights

Enter pairing mode by turning wall switch off/on 5 times. Use the Sunco App to pair device, select preferred color temperature and activate night light mode.

Note: For proper functioning, this smart light requires a 2.4 GHz connection.

Specifications

Voltage	120V	Average Lifetime	50,000 hrs
Wattage	15W	Lumens	1100LM
Wattage Equivalency	150W	Moisture Rating	Damp
Beam Angle	90°	CRI	90+
Weight	0.66lbs	Usage	Indoor
Housing Material	Aluminium	IC Rated	Yes
Dimmable	Via App	Warranty	7 Years


Common Troubleshooting

Feeling in the dark about an issue with your product? No worries! Our troubleshooting section is here to shed some light and provide you with easy-to-follow solutions for any problem.

If you still need some assistance, please feel free to contact us with any questions. Our team of lighting experts are happy to help brighten your day.

Double check if fixture is properly connected and circuit breaker hasn't been tripped.	
Check proper wattage and for unobstructed fixture.	
Dimming only accessible via the app.	
Dimming only accessible via the app.	
Dimming only accessible via the app.	
Check that fixture wiring connections are secure.	
Check that the lights on the same circuit are not overloading the circuit.	
Verify fixture compatibility and that it is grounded.	
Dimming only accessible via the app.	
Verify light is connected to surge protector securely.	
Look for nearby interferences that can cause buzzing. Such as televisions, radios, computers, etc.	
Dimming only accessible via the app	

Light Distribution Angle

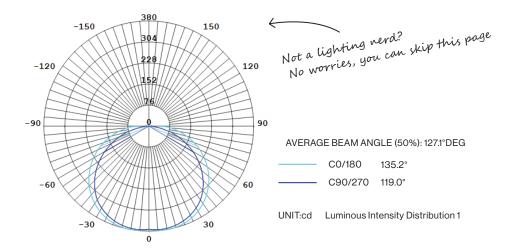

Lighting distribution angle refers to the spread of light emitted from a light source. It is an important factor to consider when selecting a fixture or bulb, as it affects the way it will illuminate an area. There are two main types of lighting distribution angles:

A symmetric lighting distribution emits light evenly in all directions, creating a cone-shaped pattern that provides a pool of light. This type of lighting is ideal for general lighting and illuminating large areas. Common applications for symmetric lighting include general area illumination, security lighting, and perimeter lighting. Symmetric lighting is also used to a certain degree in up-lighting.

An asymmetric lighting distribution angle, also known as beam angle, creates a pattern that focuses light in a specific direction. This type of lighting is ideal for task lighting as it reduces glare and light spill in other areas. Common applications include task lighting in spaces such as landscape settings, retail stores, museums, and much more.

It is important to note that the lighting distribution angle can also be affected by other factors such as the reflector design of the light source, the type of lens used, and the distance between the light source and the surface being illuminated.

Customer Support

Warranty Policy

This product is covered by our industry leading 7 year warranty.

It gets even better - scan the QR code for 2 extra years of protection!



Scan me for two extra years!

30 Day Return Policy

At Sunco we value our customers and stand by the quality and performance of our products.

If you are not completely satisfied with your purchase, we accept returns within 30 days of your purchase date.

Customer Service

 $Our Los \, Angeles \, team \, of \, lighting \, experts \, is \, here \, to \, assist \, you \, with \, all \, your \, needs! \, Contact \, us \, at: \, and \, contact \, at: \, at:$

Email:



support@sunco.com

Text or Call:





(844) 334-9938 6AM - 6PM PST Monday - Friday

Sunco Lighting made better.