

# LED TONE-SELECT™ 9W PLUG & GO™

## INSTALL INSTRUCTIONS

This guide provides important installation and safety information.

Please read all information before installing the lamp(s) and keep this sheet for future reference.

**DANGER** - Risk of Shock: Disconnect power before installation.

**CAUTION** - Risk of Fire: Use only in place of fluorescent lamps specified on the label.

**CAUTION** - Risk of Fire: If the lamp or luminaire exhibits undesirable operation (buzzing, flickering, etc.), immediately turn off power, remove lamp from luminaire and contact manufacturer.


**CAUTION** - Risk of Fire: Do not install this lamp in a preheat luminaire.

This lamps only operates on electronic ballasts. If lamp does not light when the luminaire is energized, remove from luminaire and contact lamp manufacturer or qualified electrician.

Any modifications to this product will void the warranty.

- Direct replacment for 13W/18W/26W/32W/42W G24q/GX24q CFL lamps only.
- Operates on electronic ballasts only.
- Suitable for damp locations.
- Suitable for use in totally enclosed recessed fixtures.
- This device is not intended for use with emergency exits or for emergency lighting.

**To adjust CCT settings:** Use the slide switch on the lamp to set different color temperatures: 3000K / 3500K / 4000K




**! WARNING** - RISK OF ELECTRICAL SHOCK - TURN OFF MAIN POWER SWITCH BEFORE INSPECTION, INSTALLATION OR REMOVAL.


### INSTALLATION

1. Check all the items of the retrofit kit.
2. Check if the LED lamp rating parameters correlate with this luminaire.
3. Make sure circuit breaker that supplies power to the fixture is turned off.
4. Remove the diffuser, lens cover or louver (if provided) and the existing fluorescent lamp(s) from the fixture.
5. Check if the ballast installed in the fixture is listed in the ballast compatibility chart. If not, do not make this retrofit. Ballast compatibilty chart can be found on: [www.pqlighting.com](http://www.pqlighting.com) by looking up the item number.
6. Install the new LED lamp(s) into the lampholder. Gently rotate lamps into the desired position.
7. Make sure that the pins are completely seated in the lampholder.
8. Replace the diffuser, lens cover or louver (if removed in step 4). Turn power back on at the breaker box and turn on lights.

### RETROFIT WITH 1 LAMP

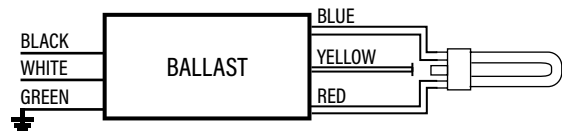

### RETROFIT WITH 2 LAMPS

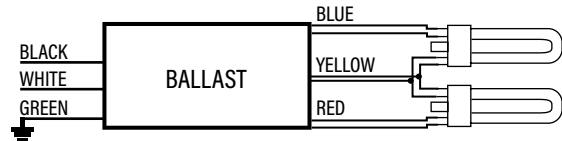

Call 1-800-323-8107 for relamping information.