



Item#: **59655**  
**LED 40W EMERGENCY PACK**  
 FOR LED COMPASS HIGH BAYS

**FEATURES**

- Easy Installation - directly connect to AC Input of LED Compass High Bay.
- Integrated junction box
- Constant power output
- Self diagnostic - unit will automatically conduct monthly 30 sec. tests and yearly 90 min. tests.
- Wireless remote included for emergency testing.

**APPLICATION**

For use with LED Compass High Bay fixtures with 0-10V dimmable drivers that are 300W or less.

**ASSEMBLED VIEW**



**OUTPUT**

Output Power	40W
Output Current	460mA Max.
Output Voltage	170V DC

**INPUT**

Input Power	15W Max.
Input Current	200mA Max.
Input Voltage	100-347V • 50/60Hz

**PERFORMANCE**

Emergency Time	90 Min.
Recharge Time Required	≥24 Hours
Battery Type	Lithium
Over Voltage Protection	Yes
Over Load Protection	Yes
Short Circuit Protection	Yes
Open Circuit Protection	Yes

**ENVIRONMENT**

Ambient Temperature	41° ~ 122°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65
Max. Mounting Height	50FT

**LIFESPAN**

Warranty (Years)	<b>5</b>
------------------	----------

**QUALIFICATIONS**




*Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.*

Item#: **59655**  
**LED 40W EMERGENCY PACK**

<b>DIMENSIONS</b> (Inches)	
Length	9.4"
Diameter	5.6"
Weight (Lbs)	--

<b>SUPPORTING DOCUMENTS</b> (Grey = not available at this time.)	
Product Sheet	VIEW
Install Instructions	VIEW

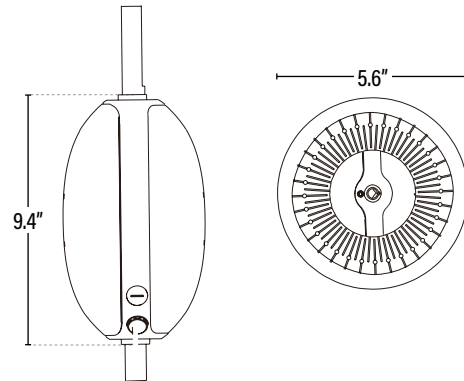

<b>PACKAGING</b>		<b>UPC</b>	<b>DIMENSIONS</b> (LxWxH)	<b>GROSS WEIGHT</b> (Lbs)
Master Carton	4	10899645001025	--	--
Individual Box	1	899645001028	11.4" x 6.5" x 7.3"	--
Country of Origin	China			
HS Tariff	--			

<b>ORDERING</b>				
<b>ITEM#</b>	<b>DESCRIPTION</b>		<b>TITLE 20</b>	<b>CASE</b>
59655	EMERGENCY PACK FOR LED COMPASS 40W/90 MIN		Yes	4

**ADDITIONAL INFORMATION:**

- Fixture must have a 0-10V dimmable driver, and 0-10V leads must be connected to Emergency Pack as indicated in wiring diagram. Emergency Pack will NOT operate if not connected.
- An un-switched AC power source is required.
- For use with LED Compass High Bay fixtures with 0-10V dimmable drivers that are 300W or less.
- Wireless remote included for emergency testing. Remote controls requires two AAA batteries to operate. Batteries are not included.