



Item#: **99055**

## LED 1X4 SPEC-SELECT™ CENTER BASKET TROFFER

1X4 LUMINARIES FOR AMBIENT LIGHTING OF  
INTERIOR COMMERCIAL SPACES

### FEATURES

Spec-Select™ Troffers feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering

### APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

### ELECTRICAL

Wattage	18W / 25W / 35W
Voltage	120-277V
Current	0.29-0.12A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

### LIGHTING PERFORMANCE

Lumens	2250 / 3125 / 4375
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

### ENVIRONMENT

Operating Temperature	-4 ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	--
Driver	--

### CONSTRUCTION

Housing	24 Gauge Steel
Lens	Acrylic (PMMA)
Base / Power Supply	Hard Wired
Finish	White

### QUALIFICATIONS


Pending

*Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.*

Item#: **99055**  
**LED 1X4 SPEC-SELECT™ CENTER BASKET TROFFER**

**DIMENSIONS** (Inches)

Length	47.8"
Width	11.9"
Height	2"
Net Weight (Lbs)	7.7

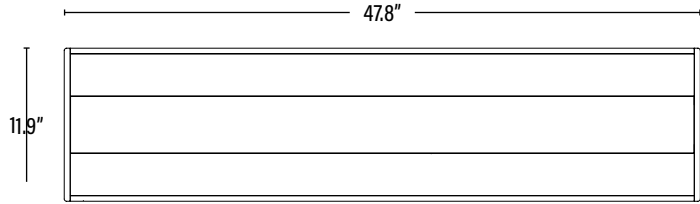

**PACKAGING**

PACKAGING	UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768023831	--
Country of Origin	China		
HS Tariff	9405.10.6020		

**ORDERING**

ITEM#	DESCRIPTION	CASE
99055	LED 1X4 SPEC-SELECT™ CENTER BASKET TROFFER/18-25-35W/35-50K/DIMM/120-277V	1

**ADDITIONAL INFORMATION:**

- Default settings; 35W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

