

Sunco

Lighting made better.

User Manual

4ft. LED Grow Light, 80W

SKU: SHG-80W




support@sunco.com
(844) 334-9938



AMERICAN
COMPANY

Whats in the Box?

Grow Light



*Let there be light!
(literally)*

Safety Information

To reduce the risk of fire, electric shock, or physical injury:

- Turn off power before changing fixture.
- Suitable for use in damp environments at temperatures ranging from 4°F to 113°F. Not for use where directly exposed to water.
- Not intended for use with emergency fixtures.
- Not compatible with photo controls.
- Not compatible with occupancy sensors.
- Not compatible with dimmers.
- Not compatible with timing devices.
- All electrical connections must be in accordance with local and National Electric Code (N.E.C.) standards.
- Please review installation manual carefully before proceeding. Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections.



WARNING:

Cancer & Reproductive Harm- www.P65Warnings.ca.gov

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1.) This device may not cause harmful interference.

2.) This device must accept any interference that may cause undesired operation. Please review all instructions carefully prior to installation.


Installation Guide - Suspension Mount



STEP 1


- Turn off circuit breaker before installation.
- Surface must support fixture weight.

Plaster board: Requires 3/8" thickness. Use #8 eye hook screws with anchors or expansion bolts (not included).



STEP 2


- Drill pilot holes 46.5 inches apart.
- Insert two plastic anchors, then screw each eye hook into an anchor.



STEP 3


- Depending on your lighting plan, space any additional anchors accordingly.
- Link up to 4 shop lights together

Installation Guide - Suspension Mount




STEP 4

- Insert a hook-chain into each slot of the light fixture. Repeat for each slot (there should be 4 total).
- Use pliers to crimp ends and secure as needed.



STEP 5


- Attach loose ends of each chain onto corresponding eye hooks on the ceiling.



STEP 6

- Plug the power cord into an electrical outlet. Turn on the circuit breaker and test the light.
- Distance between lamp and plant surface should be between 11.81 - 23.62 inches.


Installation Guide - Suspension Mount



STEP 1

- Turn off circuit breaker before installation.
- Surface must support fixture weight.

Plaster board: Requires 3/8" thickness.




STEP 2

- Install 2 plastic anchors 4 7/16 inches apart, repeat this step for an additional pair of plastic anchors 46" inches away from the initial pair of plastic anchors. Insert a screw into each anchor.
- Plastic anchor and screw positions should match mounting holes on the back side of the light fixture. The gap between the screw cap and ceiling should be 0.33 inches.

STEP 3


- Depending on your lighting plan, space any additional anchors accordingly.
- Link up to 4 shop lights together



Installation Guide - Suspension Mount


STEP 4

- a. Lift fixture up to screws and slide to one side to secure into place. Fixture should be firmly fixed against screws.




STEP 5

- a. Distance between lamp and plant surface should be between 11.81- 23.62 inches.





STEP 6

- a. Plug the power cord into an electrical outlet.
- b. Turn on the circuit breaker and test the light.



Product Details


Dimensions

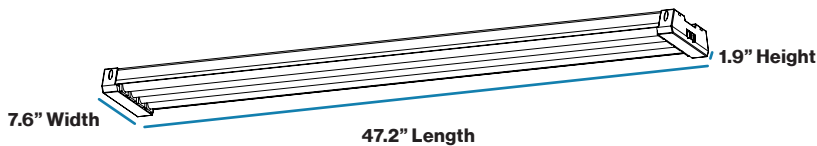

Specifications

Voltage	120V	Average Lifetime	50000 hrs
Wattage	80W	Full Spectrum	380nm to 780nm
Power Factor	>0.7	Moisture Rating	Damp
Beam Angle	120°	CRI	80
PPF	13.75umol/s	Usage	Indoor
PAR	3106.321mW	Frequency	60Hz
Dimmable	No	Warranty	3 Years

Light Distribution Angle

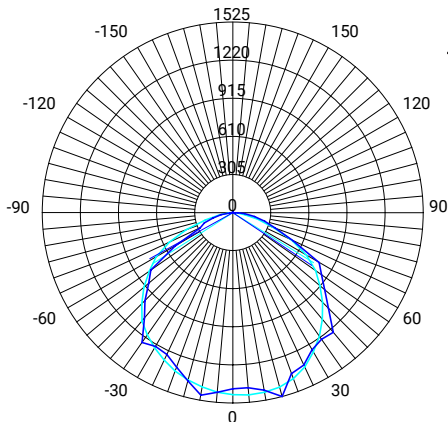

*Not a lighting nerd?
No worries, you can skip this page*

AVERAGE BEAM ANGLE (50%): 119.7 DEG

— C0/180 115.6°

— C90/270 117.2°

UNIT:cd Luminous Intensity Distribution 1

Lighting distribution angle refers to the spread of light emitted from a light source. It is an important factor to consider when selecting a fixture or bulb, as it affects the way it will illuminate an area. There are two main types of lighting distribution angles: A symmetric lighting distribution emits light evenly in all directions, creating a cone-shaped pattern that provides a pool of light. This type of lighting is ideal for general lighting and illuminating large areas. Common applications for symmetric lighting include general area illumination, security lighting, and perimeter lighting. Symmetric lighting is also used to a

certain degree in up-lighting. An asymmetric lighting distribution angle, also known as beam angle, creates a pattern that focuses light in a specific direction. This type of lighting is ideal for task lighting as it reduces glare and light spill in other areas. Common applications include task lighting in spaces such as landscape settings, retail stores, museums, and much more. It is important to note that the lighting distribution angle can also be affected by other factors such as the reflector design of the light source, the type of lens used, and the distance between the light source and the surface being illuminated.

Warranty Policy

This product is covered by our industry leading 3 year warranty.

It gets even better - scan the QR code for 2 extra years of protection!



Scan me for two extra years!

30 Day Return Policy

At Sunco, we value our customers and stand by the quality and performance of our products.

If you are not completely satisfied with your purchase, we accept returns within 30 days of your purchase date.

Customer Service

Our Los Angeles team of lighting experts is here to assist you with all your needs! Contact us at:

Email: support@sunco.com

Call or Text: (844) 334-9938

Sunco

Lighting made better.

support@sunco.com
(844) 334-9938

REV1.0



AMERICAN
COMPANY