


## 2 HEAD FLOODLIGHT EXIT SIGN

This LED Exit Sign features 2x 340° adjustable lamp heads that produce bright flood lights when the power goes out to light the path to safety. Includes dual mounting hardware and also allows for single side install. Charge the 90 minute backup battery before installing. Single- and double-sided options. Designed for indoor use only. Ideal for schools, offices, and retail.


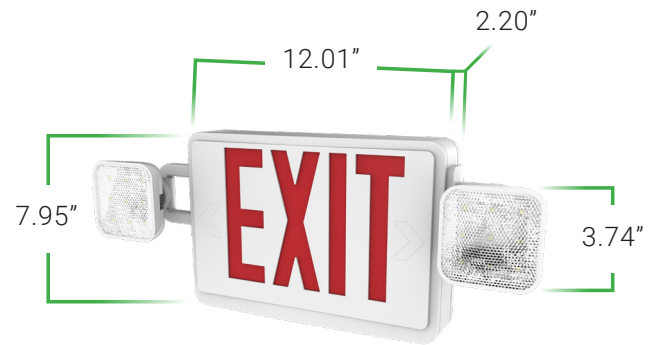


## MODELS

EX\_NDWR-#

## LIGHT DISTRIBUTION ANGLE

### SPECTRUM DISTRIBUTION

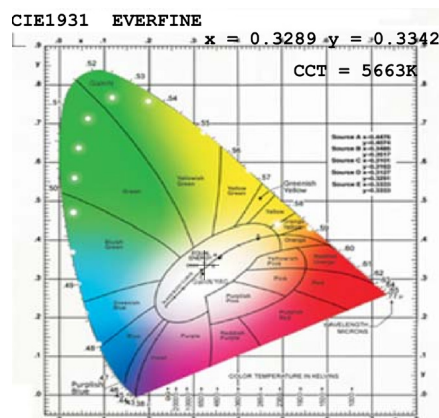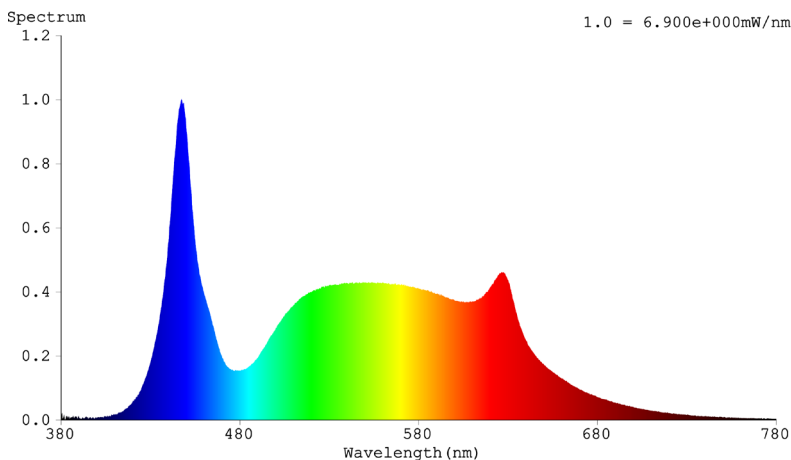

CIE1931 Chromaticity Diagram

## SPECIFICATIONS

Charging time	24h
The AC voltage	120/277V
DC charging voltage	3.6V
AC charging current (max)	31mA
DC charging current (max)	87mA
Discharge time	≥ 140mins
Discharge current	733 - 490mA
Luminous flux	220 lm
Color temperature	5500 ± 500K
Swiveling flood lights	340°
Fire resistant	Yes
Included battery	Yes
Backup battery	≥90min
Battery built-in	3.6V 1200mAh Ni-MH Battery
Weight	3.4lbs
Frequency	60Hz

### Installation Options:

1. Single-Sided Sign - Mount sign with mounting points on back or top of the fixture.
2. Double-Sided Sign - Mount sign to the ceiling from mounting point on top of the fixture.

**NOTE:** You will find the mounting hardware stored inside the fixture for shipping purposes.

## CERTIFICATIONS

