


4" SELECTABLE RETROFIT LED

Installation Manual


COMPONENTS




x1
TP24 to E26
Adapter

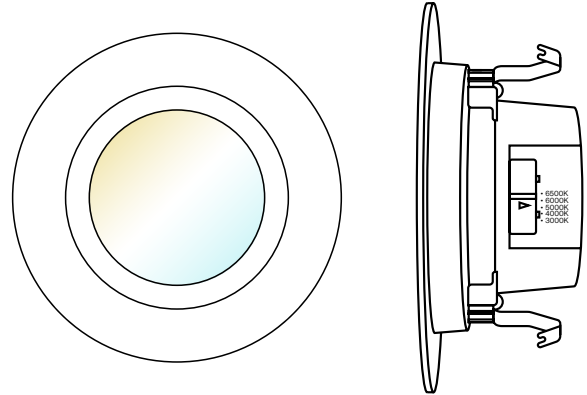

EASY INSTALLATION




Turn Power OFF




4" Diameter

- Turn off power at fuse or circuit breaker before installing.
- Locate recessed can in ceiling. Remove existing light fixture. Allow time for fixture to cool before removing.
- Ensure the opening is 4" wide.

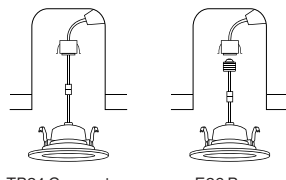


TP24 Connector E26 Base

- Determine type of connector available in your recessed can.
TP24 Connector
E26 Base




- Connect appropriate adapter (E26 or TP24) to the retrofit light. NOTE: Ensure all wires are attached to connectors.
- Turn on power and test light.




6500K
6000K
5000K
4000K
3000K

- Slide CCT switch on retrofit to choose from 5 color temperature options. Turn off light switch and continue install.



- Tuck all wires into can.
- Line up trim with opening in ceiling.
- Push light into can until secure. Spring clips will hold light in place.



Turn Power ON

- Turn on circuit breaker and test light.

COMPATIBLE DIMMERS

Leviton	Lutron
6674-POW	MACL-153M
	Caseta Smart
Legrand	DVCL-153P
RHCL453PW	DVELV-300P

SPECIFICATIONS

Voltage	120VAC
Wattage	11W
Moisture Rating	Damp
Housing Material	Aluminum + PC
Weight	0.33 lbs
Warranty	7 years

WARNING

To reduce the risk of fire, electric shock, or physical injury:

THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION.

- This product should be installed by a person familiar with the construction and operation of the product and the hazards involved.
- Installers should examine all parts that are not intended to be replaced by the retrofit kit for damage and replace any damaged parts prior to installation of the retrofit kit.
- Install this retrofit only in luminaires that match the construction features and dimensions shown in the diagrams provided. Ensure the input rating of the retrofit does not exceed the input rating of the luminaire.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install directly over a heat source, on a radiant heating ceiling, or on the surface of combustible material. Do not cover with flammable material.
- Proper grounding is required to ensure safety. This fixture is not suitable for wet environments.
- Use safety precautions and abide by regional and local laws or regulations.
- Safety eyeglasses and gloves are recommended.

FCC NOTES

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.