
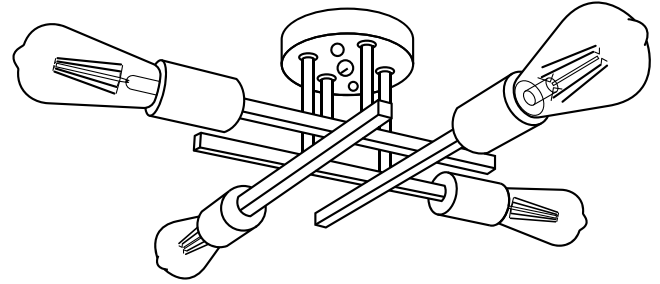


# SPUTNIK LED CEILING LIGHT


## Installation Manual

### COMPONENTS

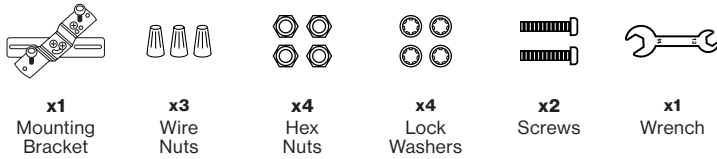


### EASY INSTALLATION

Hardwire Bracket to Junction Box




Turn Power OFF


- Turn off power at fuse or circuit breaker before installing.




- Install junction box (not included).
- Remove screw caps from mounting bracket and set aside.
- Secure mounting bracket onto junction box using (2) provided screws.




- Insert (2) short tubes and (2) long tubes into Lamp Bracket as shown.




- Using wrench, hex nuts, and lock washers, secure short tubes to canopy first.
- Repeat with (2) long tubes.




- Connect (4) white fixture wires to white wire connector. Connect (4) black fixture wires to black wire connector.



- Connect supply wires to fixture wires with included wire nuts.
  - Black to Black
  - White to White
  - Ground to Ground



- Use screw caps to secure canopy to mounting bracket.
- Install (4) E26-base light bulbs.



Turn Power ON

- Turn on circuit breaker and test light.

### FIXTURE SPECIFICATIONS

|                  |          |
|------------------|----------|
| Voltage          | 120      |
| Base             | E26      |
| Moisture Rating  | Damp     |
| Housing Material | Steel    |
| Weight           | 2.55 lbs |
| Warranty         | 7 Years  |

### BULB SPECIFICATIONS

|                  |          |
|------------------|----------|
| Voltage          | 120      |
| Wattage          | 8.5      |
| Moisture Rating  | Wet      |
| Housing Material | Glass    |
| Weight           | 0.11 lbs |
| Warranty         | 7 Years  |



## WARNING

### To reduce the risk of fire, electric shock, or physical injury:

- This product should be installed by a person familiar with the construction and operation of the product and the hazards involved.
- Abide by regional and local laws or regulations.
- Check for shipping damage prior to install. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this light fixture.
- Proper grounding is required to ensure safety.
- This fixture is not suitable for wet environments
- This fixture should not be installed directly over a heat source, on a radiant heating ceiling, or on the surface of combustible material, nor should this light be covered by flammable material.
- Use safety precautions. Safety eyeglasses and gloves are recommended.
- Sunco Lighting does not warrant the compatibility of this fixture with any bulbs or products other than the ones provided.

## FCC NOTES

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.