


# DISK 15W LED DOWNLIGHT

## Install Guide and Manual



### COMPONENTS

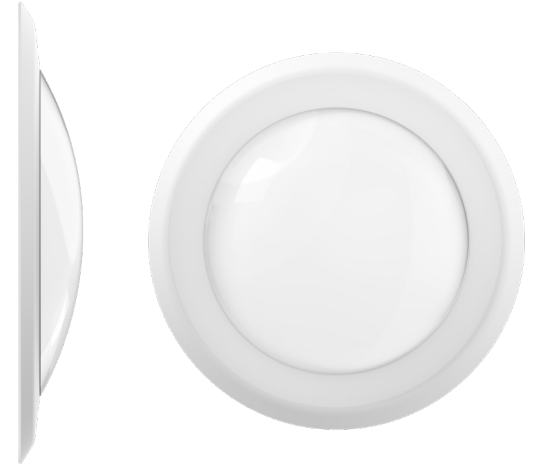


### EASY INSTALLATION SURFACE MOUNT JUNCTION BOX




Turn Power OFF

**1. Turn off circuit breaker that provides power to the light switch for the recessed lights.**  
 • This fixture is compatible with a 3.5 inch and 4 inch junction box.




Lens

**2 Remove the lens by twisting clockwise.**




**3. Connect the supply wires to the junction box wires using the wire nuts provided.**

- White to white;
- Green to green;
- Black to black;
- Grounding wire.



**4. Tuck the connected wires inside the junction box.**  
**5. Align junction box with holes on the fixture that correspond to the size (3.5" or 4").**  
**6. Attach the fixture to the junction box with either short or long screws depending on the junction box size (deep or shallow). DO NOT OVER TIGHTEN.**

**7. Complete the installation by screwing the lens back into place (counter clockwise).**



Turn Power ON

**8. Turn on circuit breaker and test the light.**

### WARNINGS

To reduce the risk of fire, electric shock or injury to people:

- This product should be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Check for damage during shipping prior to install. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this LED light fixture.
- Do not alter, relocate or remove wiring during installation.
- Do not make or alter any open holes in an enclosure of wiring or electrical components.
- Use safety precautions. Safety eyeglasses and gloves are recommended.
- Please review instructions carefully before proceeding.



### SPECIFICATIONS

Voltage	120V
Wattage	15W
Suitable for Locations Ingress	Damp
Housing	Aluminum+PC
Weight	0.39lbs
Warranty	7 years

# DISK 15W LED DOWNLIGHT

## Install Guide and Manual

### COMPONENTS

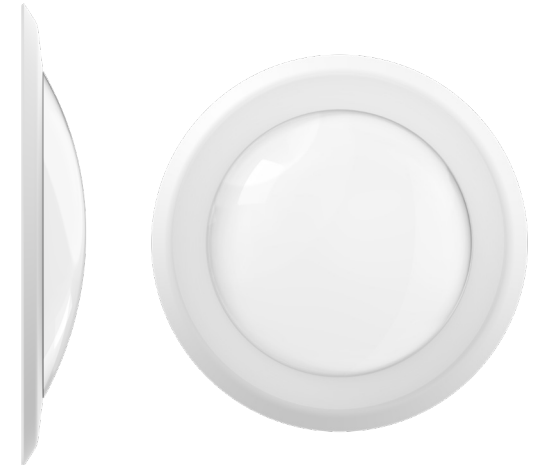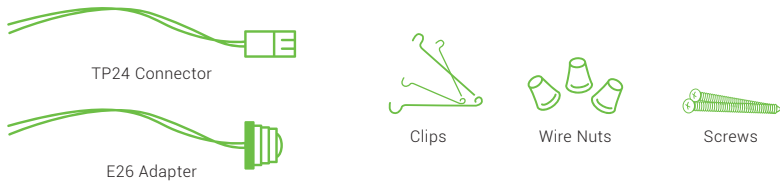


### EASY INSTALLATION RETROFIT INSTALLATION-CAN




Turn Power OFF

- Turn off the circuit breaker that provides power to the light switch for the recessed lights.
- Locate the housing.
  - Remove previous fixture, fixture may be hot so allow time to cool after turning off power.




- Remove the lens by twisting clockwise.




Spring Holder Metric Screws

- Place the springs into the keyhole slots on the back of the fixture using the Metric screws provided. Using a screwdriver, gently tighten in place.
  - Slot placement should be chosen based on can size (5" or 6").




- Confirm whether your recessed can has an E26 Socket or a TP24 Connector.
- Connect the Disk wires to either the E26 adapter wires or the TP24 adapter wires using the wire nuts provided.
  - White to white; Black to black
  - It is highly recommended that a licensed electrician installs the ground wire to the box, if not already included in your existing can.




E26 Adapter Wire Nut

- FOR E26 ADAPTER**
- Screw in the Disk's E26 Adapter to the Recessed Can's E26 Socket.
  - Attach ground wire to the grounding screw located inside the can.




TP24 Connector Wire Nut

- FOR TP24 CONNECTOR**
- Connect the TP24 adapter to the TP24 connector inside the recessed can.
  - Attach ground wire to the grounding screw located inside the can.



E26 Adapter TP24 Connector Spring Slots Spring Slots

- Pinch springs and line up trim ring with opening.
- Hook disk springs into housing.
  - Strong springs. Use caution when compressing springs to fit inside can. Springs can bounce back quickly and cause injury.



- Push disk into recessed can until secure
- Complete the installation by screwing the lens back into place (counter clockwise).
- Turn on circuit breaker and test the light.



Turn Power ON