



LED UTILITY SHOP LIGHT

Installation Manual

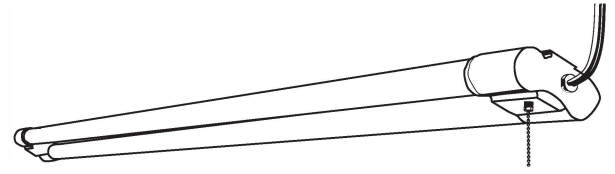

COMPONENTS

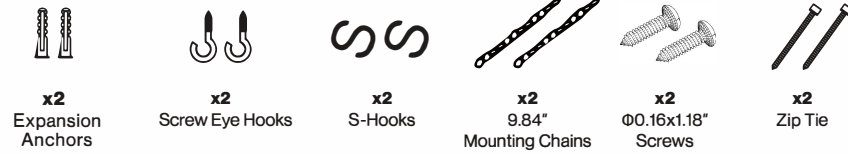

IMPORTANT SAFETY INSTRUCTIONS

- This fixture is to be installed directly beneath a ceiling-mounted receptacle.
- This fixture has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will only fit a polarized outlet one way.
- If the plug does not fully fit the outlet, reverse the plug. If it still does not fit, contact a qualified electrician.
- Do not use with an extension cord unless plug can be fully inserted.
- Do not alter plug.

EASY INSTALLATION FLUSH MOUNT

	<p>1. Turn off circuit breaker before installation. CAUTION: Mounting surface must be able to support weight of fixture.</p>		<p>NOTE: Space fixture to suit your lighting plan and power chord length (60"). 4 units maximum.</p>
	<p>2. Drill 2 pilot holes into ceiling. Holes should be 46.83 inches apart.</p> <ul style="list-style-type: none"> • Dry Wall: 7/32" drill bit • Wall Stud: 9/64" drill bit 		<p>5. Align fixture to screws. 6. When holes are aligned, push fixture up. • Slide to secure.</p>
	<p>3. Insert expansion anchors into pilot holes. 4. Tighten screws into expansion anchors. • Leave about 0.17" gap between the screw heads and mounting surface.</p>		<p>7. Plug in power cord to electrical outlet 8. Turn on circuit breaker and test light.</p>

WARNING


- To reduce the risk of fire, electric shock, or injury:**
- Turn off circuit breaker before installing this fixture.
 - This product should be installed by a person familiar with the construction and operation of the product and hazards involved. Safety eyeglasses and gloves are recommended.
 - Abide by related regional and local laws or regulations.
 - Proper grounding is required to ensure safety.
 - This fixture was designed for daisy chains only. Using it for other purposes will void warranty.
 - Check for shipping damage before installing. If the product is damaged, do not use it.
 - Keep fixture away from corrosive substances.
 - Suitable for damp locations at temperatures ranging from 4°F to 113°F. Not for use where directly exposed to water.
 - Clean fixture regularly to ensure proper operation. Do not clean with harsh solvents.
 - Use safety precautions and abide by regional and local laws or regulations.
 - This product is not compatible with 3rd party sensors or dimmers.
 - This product is not compatible with photo controls.
 - This product is not compatible with occupancy sensors.
 - This product is not compatible with timing devices.

SPECIFICATIONS

Voltage	120V
Wattage	40W
Moisture Rating	Damp
Housing Material	Plastic
Weight	0.88lbs
Warranty	7 years

LED UTILITY SHOP LIGHT

Installation Manual

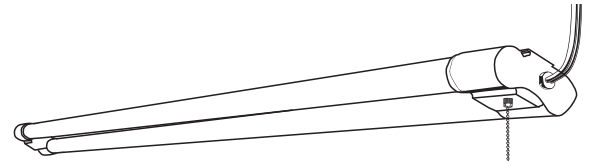

COMPONENTS



x2
Expansion
Anchors



x2
Screw Eye Hooks



x2
S-Hooks



x2
9.84"
Mounting
Chains



x2
Φ0.16x1.18"
Screws




x2
Zip Tie


IMPORTANT SAFETY INSTRUCTIONS

- This fixture is to be installed directly beneath a ceiling-mounted receptacle.
- This fixture has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will only fit a polarized outlet one way.
- If the plug does not fully fit the outlet, reverse the plug. If it still does not fit, contact a qualified electrician.
- Do not use with an extension cord unless plug can be fully inserted.
- Do not alter plug.


EASY INSTALLATION HANGING MOUNT




1. Turn off circuit breaker before installation.
CAUTION: Mounting surface must be able to support weight of fixture.




5. Insert S-hook into each end of mounting chains.
6. Loop other end of S-hooks into fixture's keyhole slots.
• Crimp ends to secure



2. Drill 2 pilot holes into ceiling. Holes should be 46.83 inches apart.
• Dry Wall: 7/32" drill bit
• Wall Stud: 9/64" drill bit




7. Secure fixture to ceiling by hanging non-crimped portion of S-hooks onto eye hooks.
• Adjust chain length as needed.
8. Secure fixture power cord to mounting chain using zip tie.

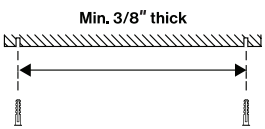


3. Insert expansion anchors into pilot holes.


NOTE: Space fixture to suit your lighting plan and power chord length (60"). 4 units maximum.



9. Plug in power cord to electrical outlet.



4. Tighten screw eye hooks into expansion anchors.



10. Turn on circuit breaker and test light.