

# WRAPAROUND

## Install Guide and Manual



### EASY INSTALLATION Junction Box Installation

**Required Tools:** Drill, Ladder, Hammer, Pliers, Tape Measure, Pencil, Cutters, Screwdriver.



Turn Power OFF

**1. Turn off power at fuse or circuit breaker before installing or servicing.**

If you are replacing an existing fixture:


- Allow fixture to cool before removing from the wall.
- Make a sketch of wiring configuration (including color) or mark wires with masking tape for identification.



**2. Mounting surface must be able to support the weight of the fixture.**


**3. Depending on your lighting plan, determine spacing to daisy chain/link fixtures.**

- Link up to 8 fixtures.
- Review Linking Information below.

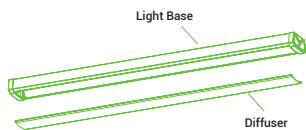


**4. With fixture on table, remove the diffuser cover from the lamp base.**

- Squeeze the cover sides to lift it off each latch.
- Repeat down length of side.

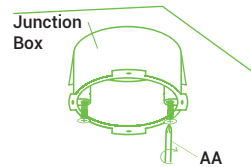

**5. Install the two screws (AA) into the junction box.**


- Leave ¼" of screws exposed to accommodate lamp base.

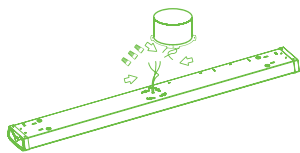

**6. Remove the 3x source wires from junction box. Punch out center knockout in base with screwdriver. Tuck 3x fixture wires through center hole of base. Connect the wires:**


- Ground to Ground (yellow/green);
- Live to Live (black);
- Neutral to Neutral (white).

**7. Secure the wires with wire nuts. Fold them into the junction box.**

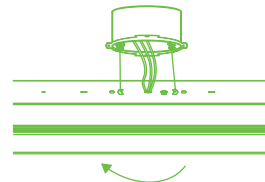

**8. Attach lamp base by aligning the 2x J-box screws with the fixture slot holes.**

**9. Turn lamp base clockwise. Tighten screws to lock fixture into place.**




Turn Power ON

**10. Reattach the diffuser cover:**

- Insert one side of cover into latches, then slowly press down.
- Move down each side to secure cover fully.

**Note latch mechanism near arrows.**

**11. Turn on circuit breaker and test light.**

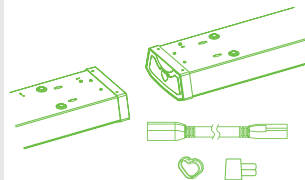

**LINKING INFORMATION**

- Use provided connectors to link multiple fixtures to one outlet. Choose close or standard spacing;
- Link up to 8 fixtures;
- For protection, place plastic end cap on end of any final fixtures in the daisy chain line.

## WARNING

To reduce the risk of fire, electric shock or injury to people:

- This product should be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Check for damage during shipping prior to install. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this LED light fixture.
- To ensure efficient light, regularly clean the light cover. Do not clean with harsh solvents.
- Use safety precautions. Safety eyeglasses and gloves are recommended.
- Please review instructions carefully before proceeding.

**NOTE:** When first turned on, wait about 1 minute for the circuitry to calibrate. Not for use with dimmers. Use proper installation methods to prevent water from entering.

## SPECIFICATIONS


Voltage	120V/277V
Wattage	40W
Suitable for Locations Ingress	Damp
Lumens	3500
Weight	3.63lbs
Warranty	7 years

# WRAPAROUND

## Install Guide and Manual



### COMPONENTS

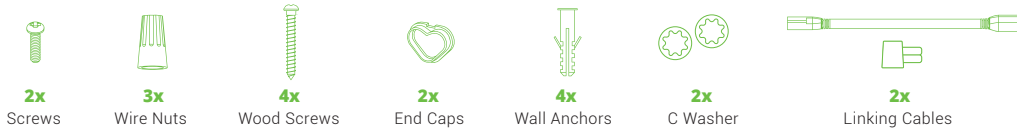


### EASY INSTALLATION Keyhole Installation


**Required Tools:** Drill, Ladder, Tape Measure, Pencil, Stud Finder, Cutters, Screwdriver, Hammer.




**1. Turn off power at fuse or circuit breaker before installing or servicing.**  
 If you are replacing an existing fixture:  
 • Allow fixture to cool before removing from the wall.  
 • Make a sketch of wiring configuration (including color) or mark wires with masking tape for identification.

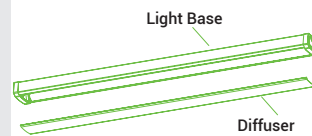


**2. Mounting surface must be able to support the weight of the fixture.**  
**3. With fixture on table, remove the diffuser cover from the lamp base.**  
 • Squeeze the cover sides to lift it off each latch.  
 • Repeat down length of side.

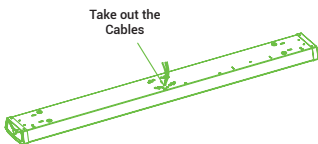


**4. Punch out center knockout in base with screwdriver. Tuck 3x fixture wires through center hole of base.**

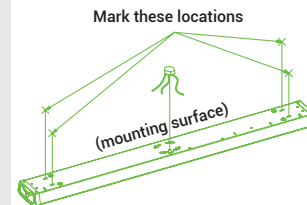


**5. Position lamp base on ceiling. Use pencil to indicate knockout hole and 4x keyhole slot locations on ceiling to prep for pilot holes.**




**6. DRYWALL MOUNTING OPTION**  
 For drywall without a stud:  
 • Drill 4x small pilot holes with a 7/32" drill bit (not included). Install provided wall anchors into the holes with your hammer.  
 • Install 4x wood screws into the mounting surface, but not fully. Leave about a 3/8" gap between the screw head and mount surface.




**7. WALL SETUP MOUNTING OPTION**  
 • Drill 4x small pilot holes with a 9/64" drill bit (not included).  
 • Install 4x wood screws into the mounting surface, but not fully. Leave about a 3/8" gap between the screw head and mount surface.



**8. Remove the shrink wrap from the end of the wires, connect to the supply wires using the wire nuts provided.**  
 • Ground to Ground (yellow/green)  
 • Live to Live (black)  
 • Neutral to Neutral (white)

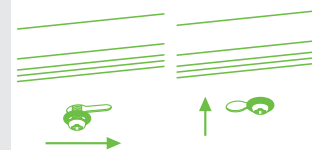

**9. Lift fixture and insert the 4x screws into the keyhole slots. Slide the lamp base to one side to secure. Fixture should be firmly placed against screws. The screw heads will rest over the narrow part of the keyhole slot.**  
 • Once the fixture is supported, tighten the screws until fixture is secured to the mounting surface.  
 • Add C-washer for extra protection.

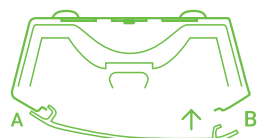

**10. Reattach the diffuser cover:**  
 a. Insert one side of cover into latches, then slowly press down.  
 b. Move down each side to secure cover fully.  
**Note latch mechanism near arrows.**



**11. Turn on circuit breaker and test light.**