

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°F to 122°F and to be horizontally mounted with the LEDs facing down.
- This product must be installed in accordance with the applicable installation code by a Person familiar with the construction and operation of the product and the hazards involved.
- Min 167°C supply conductors.
- This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor

Installation


1. Hook Installation

- 1. Remove the plastic ring firstly.
- 2. Thread the power cord through the hole of hook and rotate the hook into 3/4" hole on fixture tightly.
- 3. Tighten the M4x8 screw beside the hook.
- 4. Connecting the wire according to the wiring diagram then installation is done.


2. Trunnion installation

- 1. Remove the plastic ring firstly.
- 2. Thread the power cord through the hole of hook and rotate the hook into 3/4" hole on fixture tightly.
- 3. Tighten the M4x8 screw beside the hook.
- 4. Secure the fixture to the mounting position, then adjust the desired angle, lock the angle adjustment screw.
- 5. Connecting the wire according to the wiring diagram then installation is done.

Hook M4x30mm Screw Seal ingKits Attenti onLocker End Up Accessory pocket M4x8mm Screw M4x8mm Screw

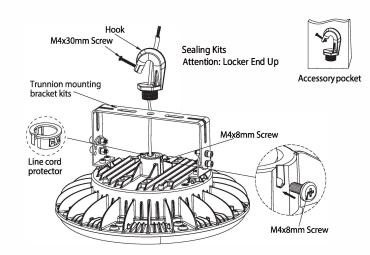

Wire Connection

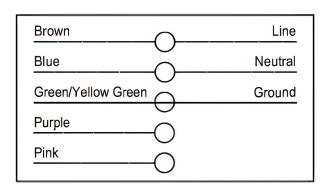

Note: Two dimming wires in the driver box.