



Item#: **04819**
LED TONE-SELECT™ DUAL
POWER LINEAR T5
 INTERNAL DRIVER LAMP-STYLE
 RETROFIT KITS (UL TYPE B)

FEATURES

The LED tube lamp provides exceptional LED lighting with reduced energy and maintenance costs. The linear LED does not use a fluorescent ballast to work; instead they feature a built-in universal line voltage driver, making it a top of the line replacement for standard fluorescent lamps.

SINGLE OR DOUBLE ENDED DIRECT WIRE

- Adjustable color temperature (3 Settings)
- No ballast required, lamp runs off main
- Exceptional efficacy
- Suitable for both Shunted and Non-Shunted Sockets

(Review install instructions for more details.)

ELECTRICAL

Wattage	12W
Voltage	120-277V
Current	105mA
Power Factor	0.9
Total Harmonic Distortion (THD)	20

LIGHTING PERFORMANCE

Lumens	1550 / 1600 / 1600
Lumens Per Watt (LPW)	130
Color Temperature (CCT)	3500K / 4000K / 5000K
Color Rendering (CRI)	83
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	180°
BUG Rating (Backlight, Uplight, and Glare)	--

ENVIRONMENT

Operating Temperature	-4° ~ 113°F
Suitable Location	DAMP
Ingress Protection Rating	IP20
Suitable Fixture Type	Open
Suitable for Emergency Fixtures	No

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Samsung
------------------	---------

CONSTRUCTION


Housing	Glass / Plastic End Caps
Lens	Safety Coated
Base / Power Supply	G5 - Mini Bi Pin

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.

Item#: **04819**
LED TONE-SELECT™ DUAL POWER LINEAR T5

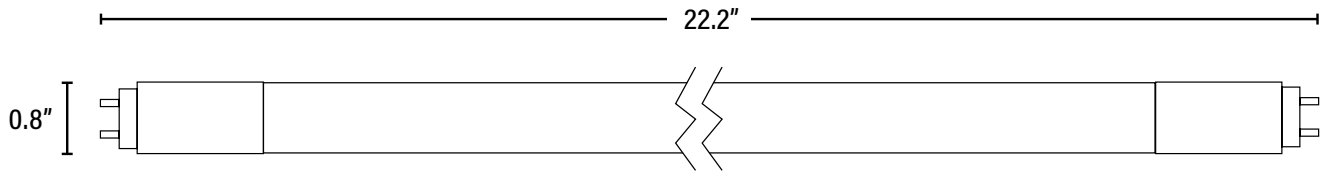

DIMENSIONS (Inches)

Length (MOL)	22.2"
Width/Diameter (MOD)	0.8"
Net Weight (Lbs)	--

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	25	10811768026433	--	--
Individual Box	1	811768026436	--	--
Country of Origin	China			
HS Tariff	8539.52.0051			

ADDITIONAL INFORMATION:

Safety Feature: Tube(s) will not light if power is still running through the ballast. Refer to the install instructions for proper installation.