



AccuSpec V4.50
Transaction #: 22401639

JOB TITLE: HCH-104

Date: 25/04/2024

Approved By:

Submittal review and approval required prior to listed unit(s) being released for production and shipment. Unit(s) configured based on information provided. The Approver is responsible for ensuring the units, options, and accessories meet the job specifications and comply with any applicable code requirements.



SUBMITTAL SCHEDULE & DATA

Steam/Hot Water Unit Heaters

Job Name: HCH-104

Date: 25/04/2024

Location:

Engineer:

Submitted by: Roger Abdo

Architect:

Contractor:

		Unit Tag	
Model Number	HCH104SB01SA		
Quantity of Units	1		
Btu/Hr Output	79,489		
CFM	1,830		
Outlet Velocity (fpm)	503		
Entering Air Temp. (°F)	60		
Final Air Temp. (°F)	99		
Fluid Type (Steam or Hot Water)	Hot Water Low Temp		
Steam Pressure (PSI)	N/A		
Condensate (lb/hr)	N/A		
Entering Water Temp. (°F)	122		
Glycol % and Type	0%		
Water Flow Rate (GPM)	15.9		
Water Pressure Drop (Ft of Water)	10.6		
Water Temp Drop (°F)	10.0		
Supply Voltage	115/60/1		
Motor Type	Enclosed Air Over with Thermal Overload		
Motor HP	1/6		
Motor RPM	1,075		
Unit Amps ¹	2-2.5		
Options & Accessories (See Attached Pages)			

Remarks _____

¹ The unit FLA may vary based on the actual motor shipped with the unit.



AccuSpec V4.50

SUBMITTAL SCHEDULE & DATA

Steam/Hot Water Unit Heaters

Model	Description	Qty	Tag
HCH104SB01SA	Steam/Hot Water Unit Heater	1	
59251	HCH104SB01SA	1	
23124	Thermostat - Range: 40-90°F	1	



AccuSpec V4.50

STEAM/HOT WATER MODEL NOMENCLATURE

1,2,3	4,5,6	7	8	9,10	11	12
HCH	104	S	B	1	S	A

1,2,3 - Model Type

HCH - Horizontal Airflow Steam/Hot Water Unit Heater

4,5,6 - Input Rating

104 - 104,000 BTUH

7 - Coil Type

S - Standard

8 - Development Sequence

B - Current

9,10 - Motor and Drive Code (Power Code)

1 - 115/60/1 - Enclosed Air Over with Thermal Overload

11 - Fan Guard Style

S - Standard Fan Guard

12 - Factory Installed Option

A - None





AccuSpec V4.50

DIMENSIONS – UNIT

Model HCH Dimensions

Mounting Holes
1/2" - 13 Tap

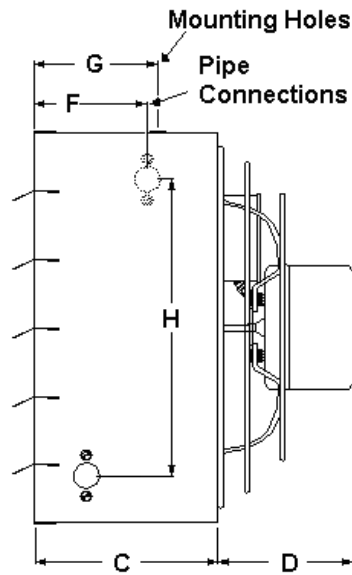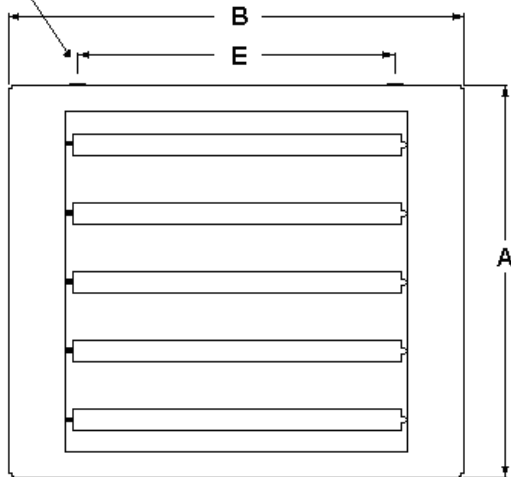

Model Size HCH 104
Dimensions (in inches)

A	26.5
B	33
C	9.7
D ¹	8.5
E	21
F	3.2, 5.8
G	6.7
H	21.2
Connections Copper tube OD (in.)	1.125
Fan Diameter	18
Approx. Ship Wt	93 lbs.

¹ Dimension is for 115V motor.

Specifications

Core Type (Serpentine) Multi
 Copper Tube Size (inches) 1 1/4
 Copper Tube Wall Thickness (inches) 0.016
 Maximum Coil Rating 150 PSI / 375°F
 Junction Box: All units include an electrical junction box either integral to the motor or attached to the unit casing.

Specifications

General

Contractor shall furnish and install steam/hot water unit heater(s). Performance shall be as indicated on the equipment schedule in the plans. Unit heater(s) shall listed by ETL as certified.

Units

Self-contained, factory assembled, pre-wired unit consisting of cabinet with air deflection louvers, supply fan, motor, and condenser.

Coating

Electrostatically applied baked on Hammertone-Beige corrosion resistant, polyester powder coat paint that meets the following tests:

1. 500 hours of salt spray as defined in ASTM B117.
2. Adhesion/crosshatch tape tests as defined in ASTM D3359, Method B, Rating 5B.
3. Will not crack or peel when test panel is bent around a 1/8 inch arbor.

Condenser

Condenser coils are of the extended surface type of serpentine design, utilizing aluminum fins and DLP-type copper tubes. Tubes are mechanically bonded to the collars of the fins. The condensers are warranted for operation at steam or hot water pressures up to 150 pounds per square inch gauge and/or temperatures up to 375°F. All coils are leak tested at 165 to 200 psig, air under water. Fins are continuous across the width and depth of the condenser and are vertically oriented to minimize the collection of dirt and dust.

Coils are of serpentine design with horizontal tubes, vertical fins and side supply and return. All tube bends are brazed. All tubes have individual expansion bends. Copper tubes are 1 1/4" O.D. with 0.016" wall thickness.

Motor

Single motor with a supply voltage of 115/60/1 and horsepower of 1/6 as indicated on the equipment schedule and manufactured in accordance with NEMA standards for continuous fan duty type applications. Must be enclosed air over and single phase motors will have built in thermal overload protection. Will be mounted to the unit with rubber vibration absorbing material. The entire length of the line voltage motor leads will be shielded and terminate in a factory supplied junction box mounted on the unit or integral to the motor.

Fan/Fan Guards

Fans AMCA rated direct drive, aluminum blade, steel hub propeller will be statically and dynamically balanced. Unit shall be equipped with a safety fan guard.

Accessories

The following items are to be field installed in accordance with the manufacturer's instructions:

Room Thermostat: Single-stage, 16 amp @ 115V; 8 amp @ 230V. 40-90°F range.