


# MOTOBATT

QuadFlex™ Battery  
 WWW.MOTOBATT.COM  
 MBT9B4



## Physical Dimensions: (in./mm)

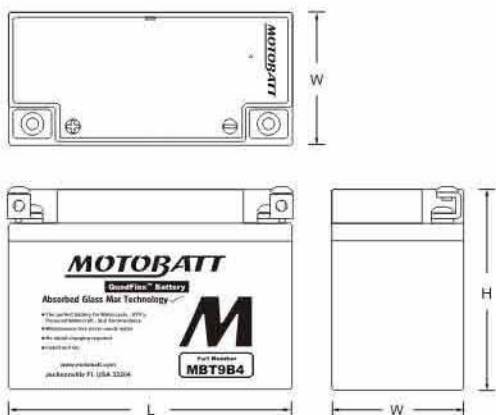

L: 5.91(150) W: 2.76(70) H: 4.13(105)

Tolerances are +/0.04in.(+/1mm) and +/-0.08in.(+/-2mm) for height dimensions.

## Features

- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

## Performance Specifications

**Nominal Voltage** ----- 12 volts (6 cells)

### Nominal Capacity

20-hr. (0.45A to 10.50 volts)-----	9.45AH
10-hr. (0.9A to 10.50 volts)-----	9.0AH
5-hr. (1.8A to 10.20 volts)-----	7.65 AH
1C. (9.0A to 9.6 volts)-----	42Min (6.3AH)
8C. (72A to 6.00 volts)-----	3 Min (3.6AH)

**Approximate Weight** ----- 7.76 lbs. (3.52kg)

**Energy Density** (20-hr. rate) ----- 16.8W-h/in<sup>3</sup> (102.8 W-h/l)

**Specific Energy** (20-hr. rate) ----- 14.6W-h/lb (32.2 W-h/kg)

**Internal Resistance** (approx) ----- 26 milliohms

**CCA** (-0.4°F/-18°C, 7.2V, 30S)----- 115 amperes

**CA** (68°F/20°C, 7.2V, 30S)----- 140 amperes

**Shelf Life** (% of nominal capacity at 68°F (20°C))---- SOC% OCV

1 Months -----	97%	12.78V
3 Months -----	91%	12.7V
6 Months -----	83%	12.5V

### Operating Temperature Range

Charge ----- -4°F(-20°C) to 122°F(50°C)

Discharge ----- -40°F (-40°C) to 140°F(60°C)

**Case** ----- ABS

**Carton Contents** ----- 1-MotoBatt MBT9B4 Battery,  
 2 screws, Install / user manual.




RETAIL CARTON




SCREW


## Shelf life & Storage

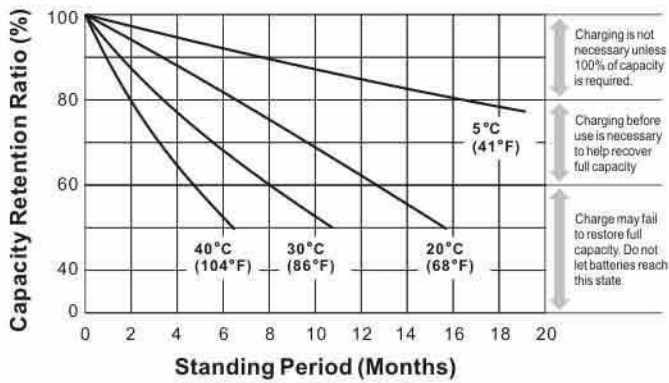


## Discharge Characteristics

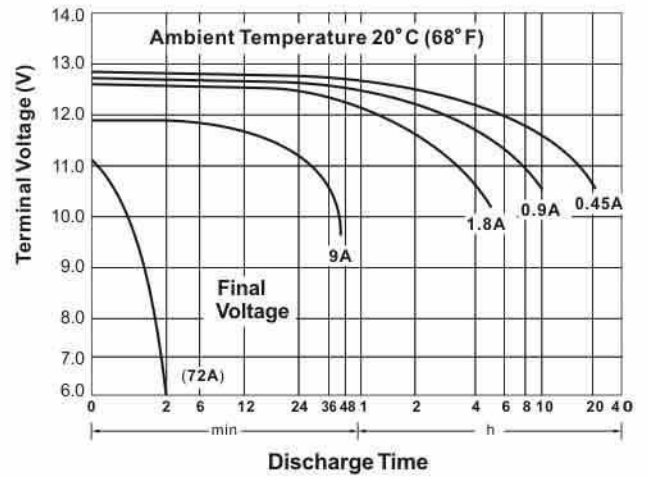

## Discharge Time vs. Discharge Current

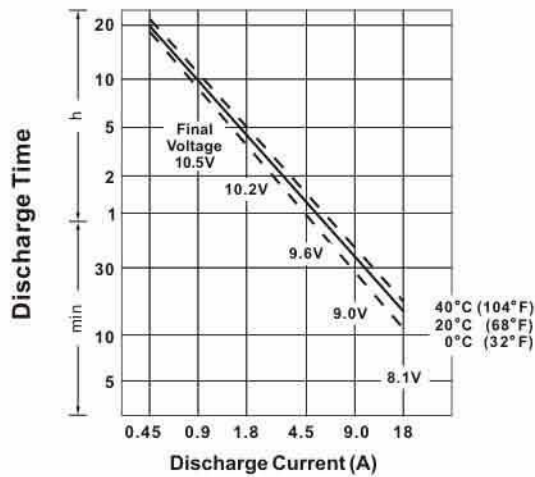

## Life Characteristics in Cyclic Use

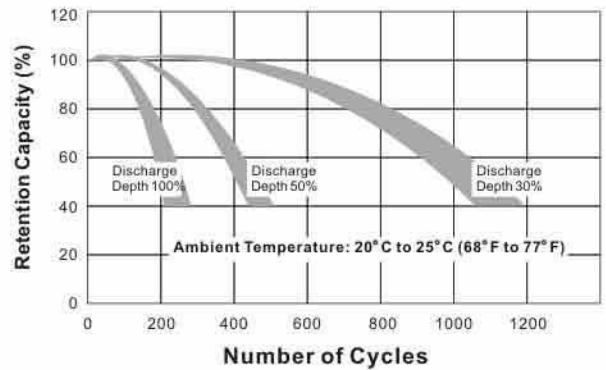

## Charging

**Cycle Applications:** limit initial current to 2.7A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F(20°C). Hold at 14.8 to 15.0 volts until current drops to under 180mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

## Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 4A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at [www.motobatt.com](http://www.motobatt.com)

## Can be used to replace

YT12BBS	YT12B4		

## Further Information

Please refer to our website [www.motobatt.com](http://www.motobatt.com) to locate a distributor in your area.