



Trouble reading this guide?
Use this link for PDF version
www.bn-link.com

Need Help?
Email: support@bn-link.com
Web: www.bn-link.com/ticket

-2-

NOTE: Hold ON/OFF button for 5 seconds while it is plugged in to restore the factory setting if you want to erase the plug's current settings.

▶Indicator Light Status
Blue light blinks every 0.5 second-Easy Mode connection
Blue light blinks every 2 seconds- AP Mode connection

▶Parameter
125VAC/60Hz, 10A/1250W
USB output:
PD 30W when the Type-C port alone is in use

-3-

QC 3.0 when ONE Type A port alone is in use 5V/3A in total when multiple ports are in use
Working Temp: -10 ~60 C
Wi-Fi Frequency: 2.4 GHz
Do not exceed electrical ratings



▶Install the “BN-LINK Smart” App
1. Search for BN-LINK Smart App on App store/Google Play Store, or just scan the QR code below to download.
(For iPhone, you can use build-in camera

-4-

to scan the QR code. For Android, you may need barcode scanner to do that. Please confirm the App icon before downloading.)
PS: You can also add this smart plug to bn-link smart app directly if you already have it on your phone, it is compatible and works the same way.

2. Register an account and memorize the password, enter your email address or your phone number, then obtain verification code to complete the registry.

-5-






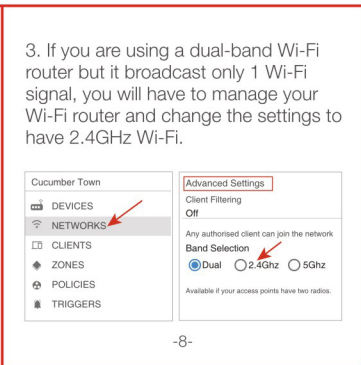
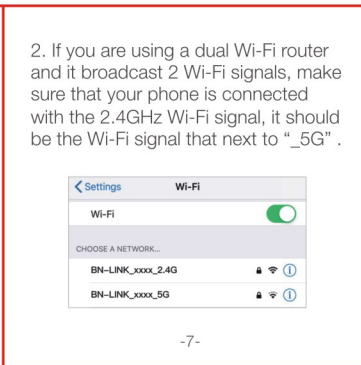


2. If you are using a dual Wi-Fi router and it broadcast 2 Wi-Fi signals, make sure that your phone is connected with the 2.4GHz Wi-Fi signal, it should be the Wi-Fi signal that next to “_5G” .

3. If you are using a dual-band Wi-Fi router but it broadcast only 1 Wi-Fi signal, you will have to manage your Wi-Fi router and change the settings to have 2.4GHz Wi-Fi.

A: Connection via Bluetooth–Blue indicator light blinks rapidly (twice a second)
Confirm that the Bluetooth on the smartphone is activated. If you are using an Android device, the location permission must be allowed.
Confirm that the smart plug is plugged into a live outlet.
Open BN-LINK Smart app.
A dialogue box will pop up, indicating that the device has been discovered. Tap “Go to add” .

-9-

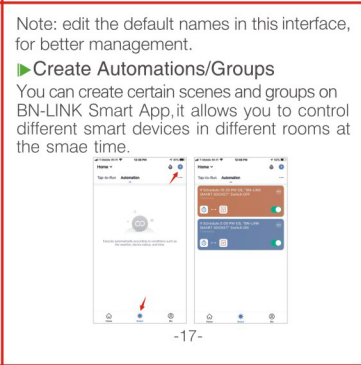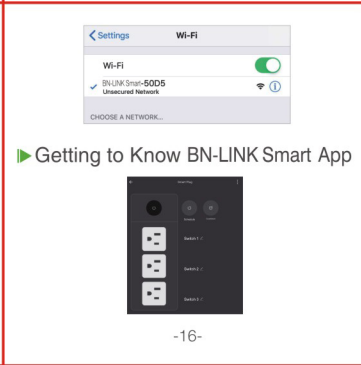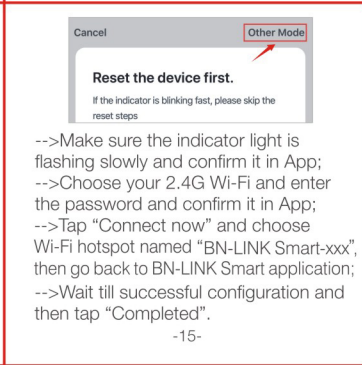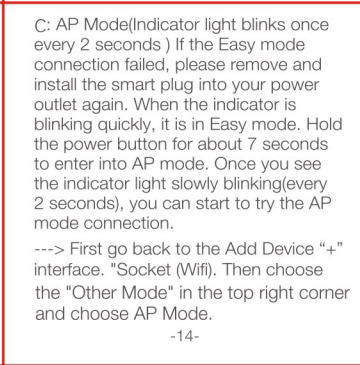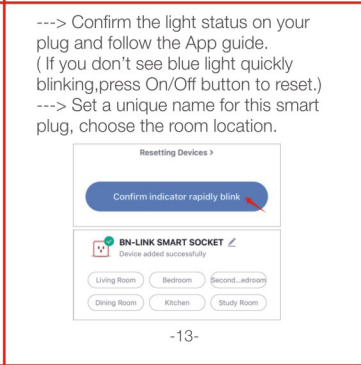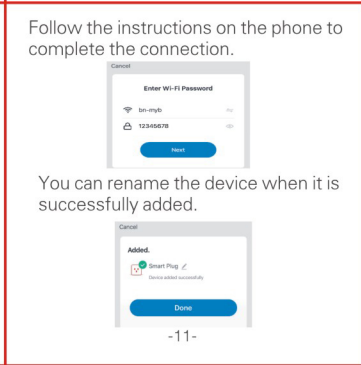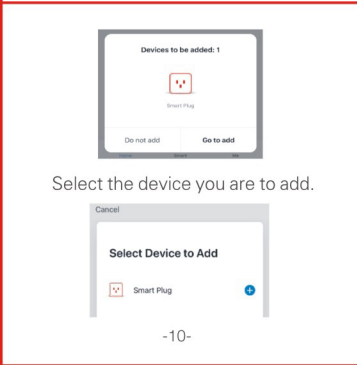

Note: edit the default names in this interface, for better management.

▶Create Automations/Groups
You can create certain scenes and groups on BN-LINK Smart App, it allows you to control different smart devices in different rooms at the same time.

▶Getting to Know BN-LINK Smart App




▶Device Sharing
If you want to give others the permission to control your smart plug, you can authorize that by activating the device sharing function
Go to the BN-LINK Smart app
-->Choose the device you want to share
-->Choose Edit Button -->Choose shared devices
-->Add sharing-->Enter his/her BN-LINK Smart account
-->Search and complete.

-18-

▶How To Connect with Amazon Alexa
Requirements:
1. Amazon Alexa Device and Alexa App
2. The Smart Plug connected with BN-LINK Smart App
3. BN-LINK Smart App user ID and password.

Add BN-LINK Smart as a “Skill” for Alexa
Open Alexa app and choose Skills & Games
--> Search for BN-LINK Smart
--> ENABLE TO USE
--> Enter the BN-LINK Smart account

-19-

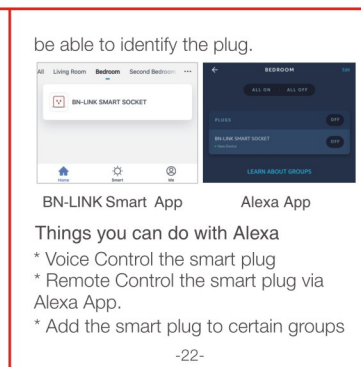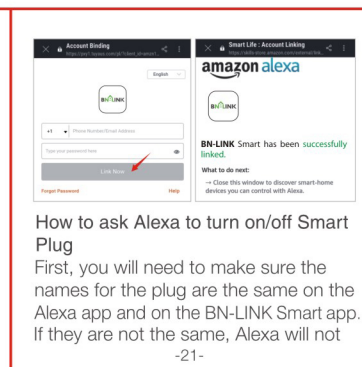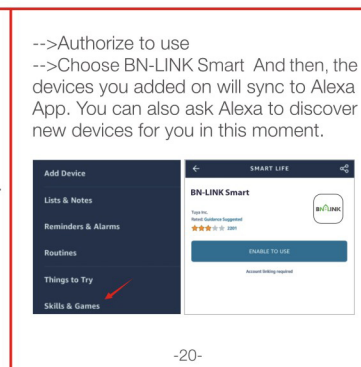

be able to identify the plug.

on Alexa App. You should make sure all the smart devices' names at your home are nonrepetitive and recognizable for Alexa. For other questions about Alexa, please find out with Amazon Alexa support page, or contact us for help directly by email.



Tips for using Alexa Voice Control
Please make sure the device name you set for the smart plug is unique and recognizable for Alexa voice assistant. You should make sure all the smart devices names at your home are non-repetitive and recognizable for Alexa.

-23-

Voice assistant system needs the exact command to do the work.

▶How To Connect with Google Home
After you've connected the smart plugs with the BN-LINK Smart app successfully, you can start to link them to Google Home app:
Open Google Home app and find “Set up device”
-->Click “Works with Google”
-->Search BN-LINK Smart
-->Enter your BN-LINK Smart account
-->Authorize to use.



-24-

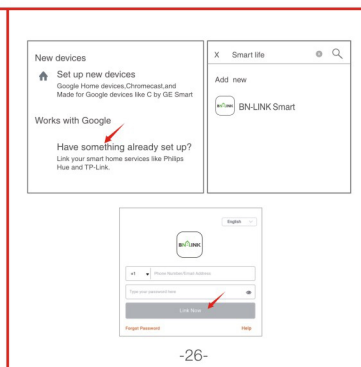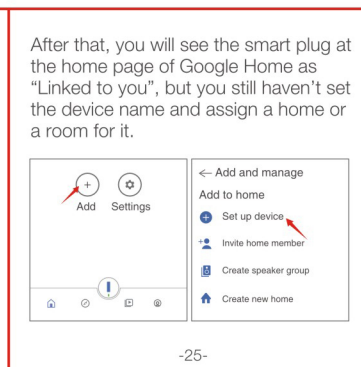

After that, you will see the smart plug at the home page of Google Home as “Linked to you”, but you still haven't set the device name and assign a home or a room for it.

Now click the device that “Linked to you” or open “Works with Google” again to manage your linked devices, follow the steps below and set up the device

-27-

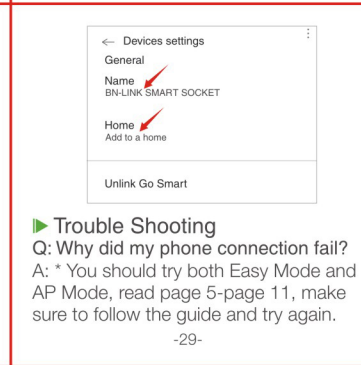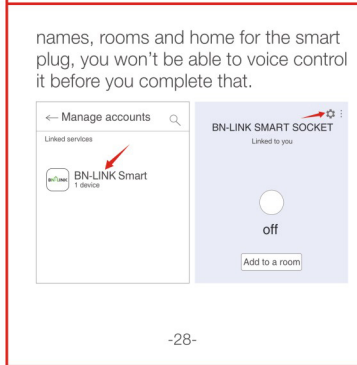

* Confirm your home Wi-Fi is 2.4GHz and that you've entered the correct password during the connection.
* Remove&Install the smart plug to start again.
Contact the customer support team for assistance if you still have problems with the connection after following the steps above.
Q: Why can't I voice control the plug with my Alexa/Google
A: * Make sure the smart plug is connected successfully on the BN-LINK Smart app. Ensure that they are working

-30-

well by testing to see if you can turn the plug on and off through the app.
* Make sure the same account is linked on the BN-LINK Smart as a skill on Alexa/Google App.
* Make sure your Alexa/Google device is working fine.
* Check the device names that you set for this smart plug, it should be non-repetitive and recognizable for voice assistant, Also, please make sure your native language is available for Alexa. If you still having trouble controlling our smart plug through voice control after

-31-

following all instructions, do not hesitate to contact us for help.
Q: Do I need to set up the device again if I changed my router?
A: Yes, you must set up the smart plug again if there are any changes to the current wifi status. (i.e changing the name of the wifi, changing the router/modem). There is no need to set the device up again if you are just changing the placement of the router in the same house.
Q: Why does it turns on/off or comes offline surprisingly ?

-32-

A: Make sure your connection to the wifi is not interrupted. Check to see if there were any timers/schedules set for the plug. If everything looks fine, reset the plug and install it again on the app. Email us at support@bn-link.com if the problem still persists.

▶Safety Information
This device is for indoor use. Please keep the device dry and away from hot, humid, and/or other extreme environments. Please ensure that the appliance used with our plug is in compliance with our

-33-

product's rating. Do not attempt to disassemble the device. Be aware of the safety risks and product damage done to the plug. This device meets UL94 V-0 flammability standard.

▶Warranty
30 days money-back guarantee: If you're not satisfied with this purchase, you can choose to refund this order within 30 days.
15 months warranty:
* The device was used in proper technical working condition.

-34-

* Failures and defects not from human errors
Risk of Damage: Not suitable for appliances that exceed 10A, be careful. Not covered if the device was found to be disassembled from use.

▶Contact Us
Friendly reminder: Using a different app from BN-LINK Smart may lead to differences in the interface, but the functionality of the plug should still be the same.

-35-

For any questions or concerns about our products, please contact us at support@bn-link.com

BN-LINK INC.
12991 Leffingwell Avenue, Santa Fe Springs
Customer Service Assistance: 1.909.592.1881
E-mail: support@bn-link.com
<http://www.bn-link.com>
Hours: 9AM - 5PM PST, Mon - Fri
Designed in California Made in China

-36-