


LED Canopy Light, 40W 4000K, 5800 Lumens

Our LED Canopy Lights are designed with a durable IP65 weatherproof rating, ensuring they can withstand the elements with ease. The sealed housing provides added protection, making them ideal for outdoor spaces such as building entryways, walkways, pathways, and perimeter lighting.

MODELS

CP_SQ_40W-BR-4000K

LIGHT DISTRIBUTION ANGLE

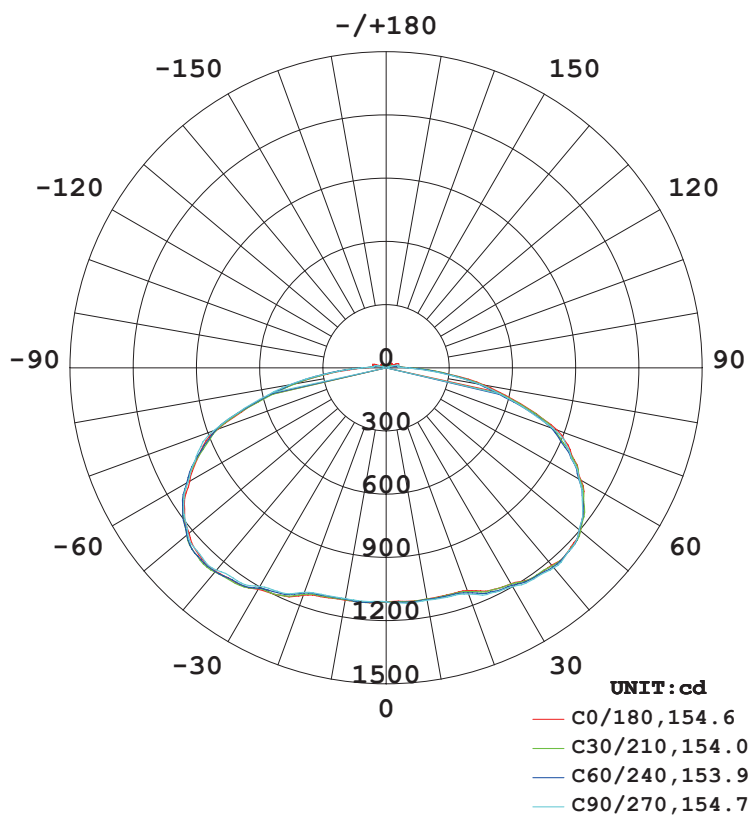

AVERAGE BEAM ANGLE (50%): 154.3 DEG

CERTIFICATIONS



SPECIFICATIONS

Voltage	120V
Wattage	40w
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	5800 lm
Selectable CCT	4000 K
CRI	80+
Beam Angle	150°
Dimmable	0-10V
Efficacy	> 130lm/w

ENVIRONMENT

Operating Temperature	-40°F-113°F
Moisture Rating	Wet location

CONSTRUCTION

Housing Material	Die casting aluminum
Weight	3.7 lbs

LIFETIME

Average Lifetime	50000HRS
Warranty	5 Years

LED Canopy Light, 40W, 5000K, 5800 Lumens

Our LED Canopy Lights are designed with a durable IP65 weatherproof rating, ensuring they can withstand the elements with ease. The sealed housing provides added protection, making them ideal for outdoor spaces such as building entryways, walkways, pathways, and perimeter lighting.

BRAND	MODEL
LUTRON	DVCL-153P-WH
LUTRON	SCL-153P-WH
LUTRON	MACL-153M-WH
LUTRON	P-PKG1WB-WH
LUTRON	AYCL-153P-WH
LUTRON	PD-6WCL-WH
Leviton	D26HD-2RW
Cloudy Bay	CBLD001WH
Amazon	Amazon Basics Smart
GE	93120079
Kasa Smart	HS220

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience "pop-on" behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.