

INSTRUCTIONS



EMERGENCY LED BULKHEAD WALL


4654


Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** ABS Housing + polycarbonate Diffuser
- **Lamp types:** 3W / 230V / LED 5000K
- **Protection against electric shock:** CLASS II. Does not require earth connection.
- **Ingress Protection:** IP20. Protection against the entry of solid bodies with dimensions more than 12mm.
- **Quality/ Corrosive rating:** Suitable for interior commercial use and residential use.
- **Ambient temperature range:** 0°C to +45°C.
- **Charge time:** 24 hours
- **Test mode:** Auto test
- **Battery type:** Lithium 6.4V 1500mA
- **Emergency duration:** 3 hours

INSTALLATION INSTRUCTIONS:

 Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.

 **CAUTION:** Risk of electric shock
PLEASE NOTE: The light source contained on this luminaire shall only be replaced by the manufacturer or the service agent or a similar qualified person.

Turn off mains supply

- Remove the polycarbonate diffuser from the fitting and use a flat blade screwdriver to open the gear tray to access the mounting base. (Fig. 1)
- Connect the battery. (Fig.2)
- Feed the electrical cable through the mounting base hole and connect the fitting to the main supply using the terminal block supplied. (Fig.3).
Brown (Live) - to Brown or Red
Blue (Neutral) - to Blue or Black
- Re-attach the polycarbonate diffuser to the fitting. (Fig. 4)
- Apply the pictogram to the polycarbonate diffuser. (Fig. 5).

Turn on mains supply

WARNING:

- Ensure all items and screws are tight.
- Refer to product labels to confirm the input voltage.
- Confirm the fitting is installed correctly before operation.
- Check whether the fitting is clean and dry before installation.
- Do not make any modifications to the fitting at random.

EMERGENCY LED BULKHEAD WALL

FIG.1

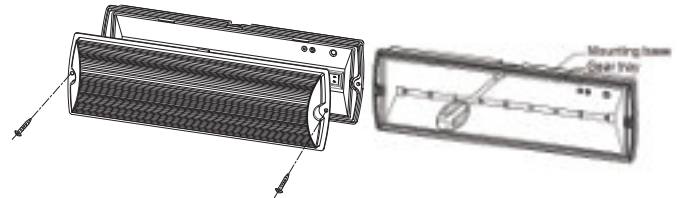


FIG.2



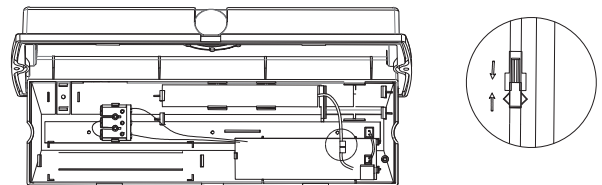


FIG.3

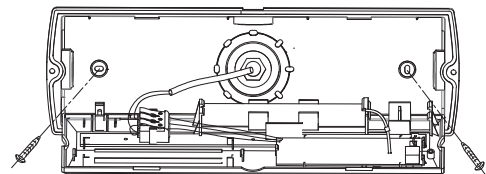


Maintained wiring



Maintained (default operation):
Connect L, N and leave jumper cable connected.

Non-maintained wiring



Non-maintained:
Connect L, N and remove jumper cable.

FIG.4

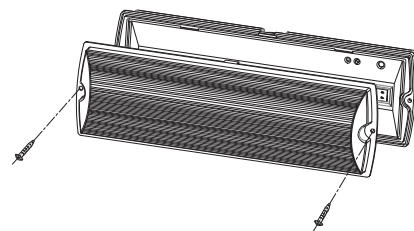


FIG.5



Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton

CAPE TOWN OFFICE: 36 Milner Street | Paarden Eiland

DURBAN OFFICE: 31 Solstice Road | Umhlanga

Ridge 011 555 5555 (Central Switchboard)

info@spazio.co.za