

6" SLIM LED DOWNLIGHT


Easy to install with slender lines, this IC rated 6" Slim requires only a 2" minimum clearance and features a smooth trim for a seamless look. J-Box is included. A 75W equivalent, this 6" slim consumes only 14W. Use the Slim around or near joists in small ceiling spac-es. Will fit soffit to double drywall ceilings. No can needed!

MODELS

DL_SL6-14W


LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

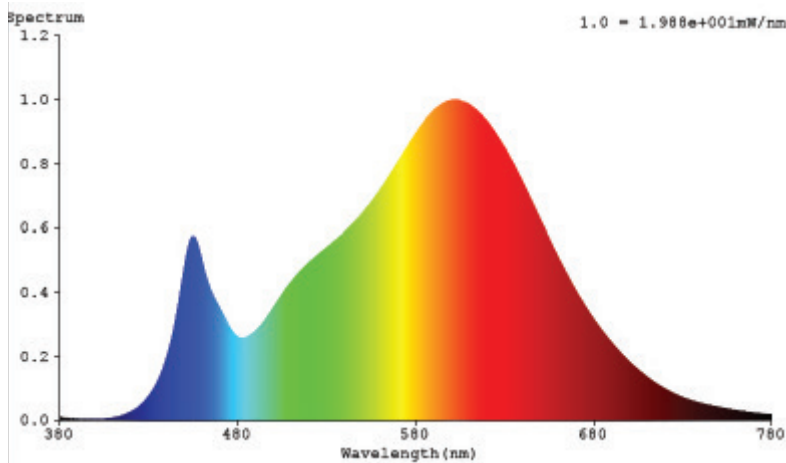


3.3 SDCM

CIE1931 Chromaticity Diagram

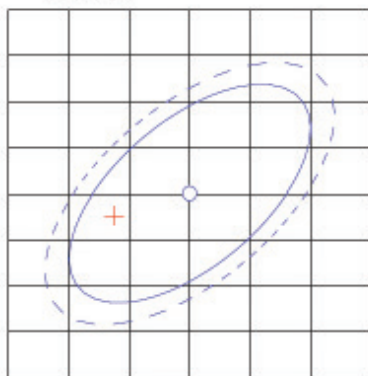

x=0.434 y=0.403 LED/3000K

CERTIFICATIONS

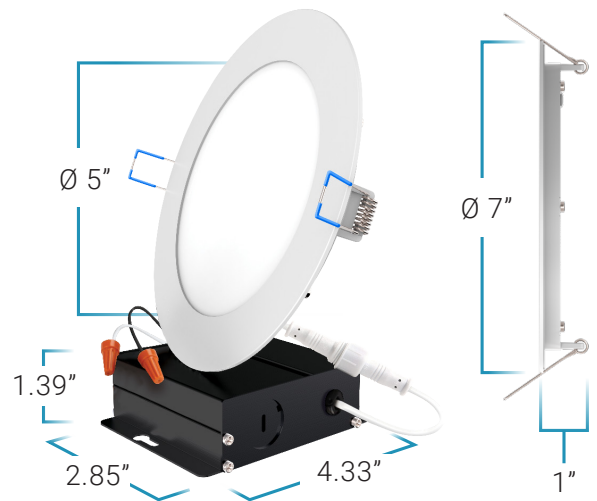

SPECIFICATIONS

Voltage	120V
Wattage	14W
Current	0.126A
Power Factor	0.90

LIGHTING PERFORMANCE

Lumens	850LM
Equivalency	75W
Frequency	60 Hz
Color Rendering Index	80 CRI
Beam Angle	90°
Dimmable	Yes
Efficacy	60 lm/w
Color Temperature	2700K/3000K/4000K /5000K/6000K

ENVIRONMENT

Operating Temperature	4°F - 104°F
Moisture Rating	Damp

CONSTRUCTION

Housing Material	Polycarbonate
Weight	0.96 lbs

LIFETIME

Average Lifetime	35,000+ Hrs
Warranty	7 Years