


LED SLIM SELECTABLE DOWNLIGHT

Experience personalized lighting with this dimmable slim downlight with a stunning bronze trim & vibrant temperatures (2700K, 3000K, 4000K, 5000K). Set the perfect ambience in living spaces, kitchens, bedrooms, & more. IC- rated junction box & spring-loaded brackets make setup simple & insulation-safe.

MODELS


DL_SL6-BR-2750K

LIGHT DISTRIBUTION ANGLE

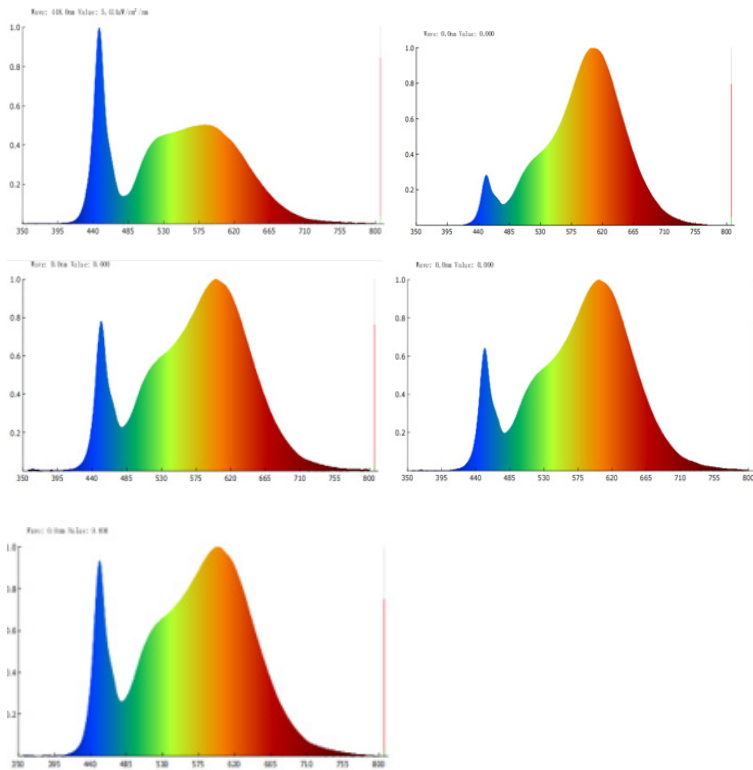

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS

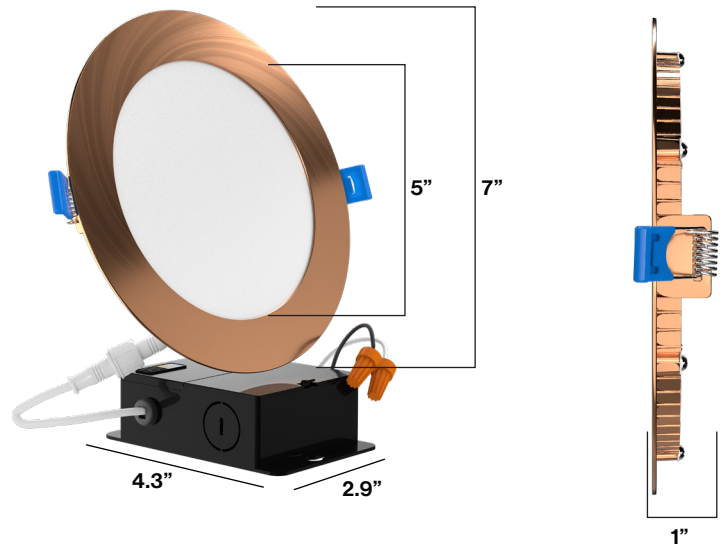

SPECIFICATIONS

| | |
|--------------|--------|
| Voltage | 120 V |
| Wattage | 14 W |
| Current | 0.11 A |
| Power Factor | 0.90 |

LIGHTING PERFORMANCE

| | |
|-----------------------|-----------------------------------|
| Lumens | 850 lm |
| Equivalency | 120 W |
| Frequency | 60 Hz |
| Color Rendering Index | 90 |
| Beam Angle | 90° |
| Dimmable | Yes |
| Efficacy | 86 lm/w |
| Color Temperature | 2700K/3000K/3500K/ 4000K/5000K |

ENVIRONMENT

| | |
|-----------------------|---------------|
| Operating Temperature | 4° F - 113° F |
| Moisture Rating | Damp |

CONSTRUCTION

| | |
|------------------|----------|
| Housing Material | Plastic |
| Weight | 0.66 lbs |

LIFETIME

| | |
|------------------|------------|
| Average Lifetime | 50,000 hrs |
| Warranty | 7 Years |