


LED SLIM SELECTABLE DOWNLIGHT

Experience personalized lighting with this dimmable slim downlight with a luxurious nickel trim & vibrant temperatures (2700K, 3000K, 4000K, 5000K). Set the perfect ambience in living spaces, kitchens, bedrooms, & more. IC- rated junction box & spring-loaded brackets make setup simple & insulation-safe.

MODELS


DL_SL6-NK-2750K

LIGHT DISTRIBUTION ANGLE

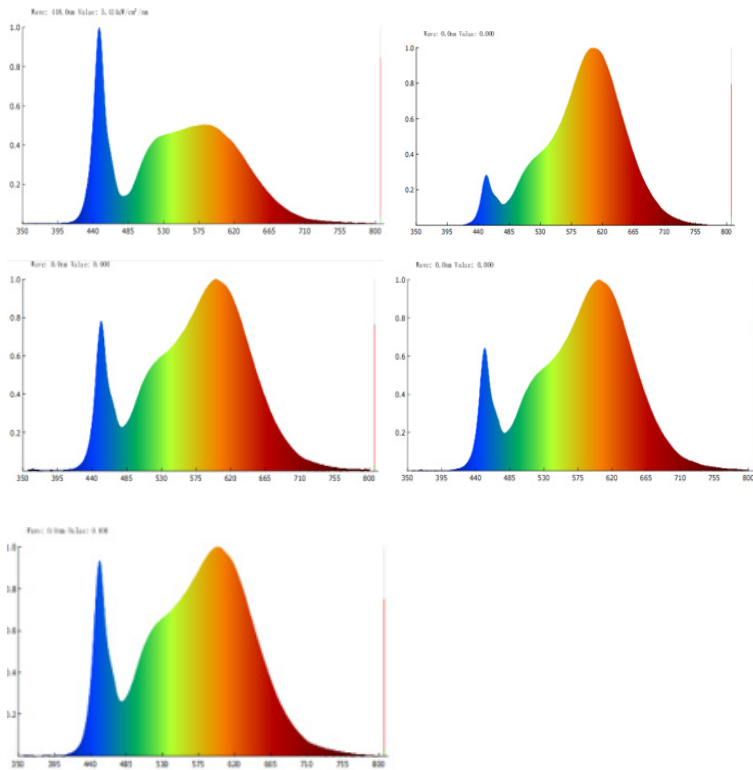

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS

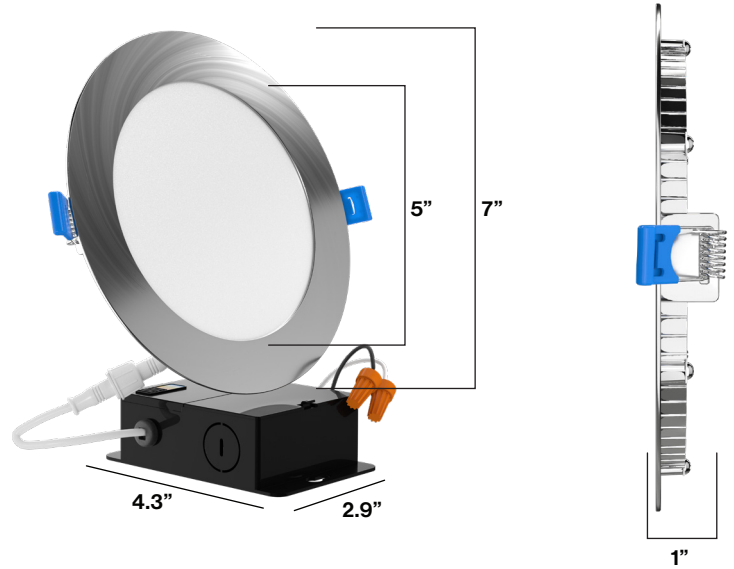

SPECIFICATIONS

Voltage	120 V
Wattage	14 W
Current	0.11 A
Power Factor	0.90

LIGHTING PERFORMANCE

Lumens	850 lm
Equivalency	120 W
Frequency	60 Hz
Color Rendering Index	90
Beam Angle	90°
Dimmable	Yes
Efficacy	86 lm/w
Color Temperature	2700K/3000K/3500K/ 4000K/5000K

ENVIRONMENT

Operating Temperature	4° F - 113° F
Moisture Rating	Damp

CONSTRUCTION

Housing Material	Plastic
Weight	0.66 lbs

LIFETIME

Average Lifetime	50,000 hrs
Warranty	7 Years