LED VAPOR TIGHT LINEAR


Installation Guide

! WARNING


- 1. To avoid electric shock, disconnect power at source prior to installation.
- 2. The installation should be performed by qualified electricians or lighting technicians.
- 3. Before conducting any installation, maintenance, or removal, disable all power to the luminaries and wait until the fixture cool down.
- 4. Do not touch the fixture while it is in service.
- 5. Operating temperature is -40F to 113F.
- 6. If there is any problem with the fixture, TURN OFF the power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

Installation and instructions


Surface mount (default setting)

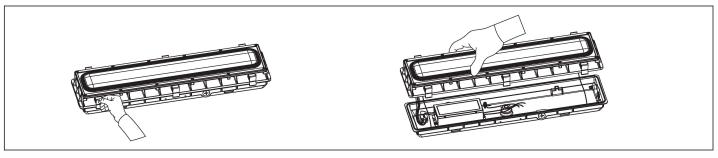

1. Unfasten the latches and separate the led module and the power housing.

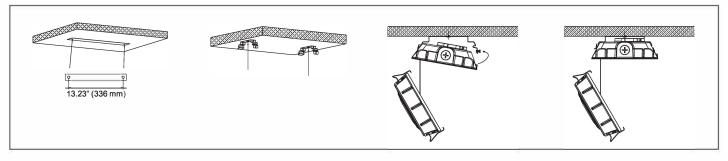


- 2. Use the leveling ruler to settle the screws hole then secure the housing to the ceiling with screws.
- Connect wires (voltage to black, white to common, and green to ground);
 Secure the led module to the housing and fasten six latches, ensuring water does not enter fixture.



V-Hook Mounting (Sold separately)

- 1. Put the mounting bracket on the housing, tighten it with screws.
- 2. Fasten the V hook hang it with the chain.



WIRING DIAGRAM

For 1-10V dimming version, please check wiring diagram below.

| () | |
|--------------------|---------|
| White | Neutral |
| Green/Yellow Green | Ground |
| Purple | DIM+ |
| Pink | DIM- |