





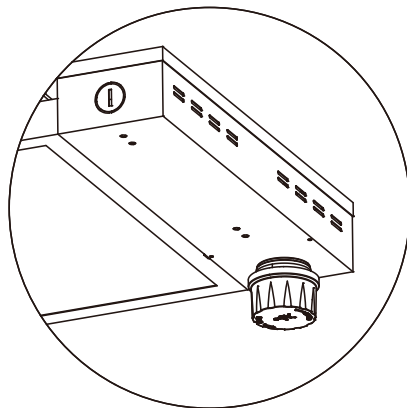

LINEAR HIGH BAY LIGHT LL3

Installation Method:

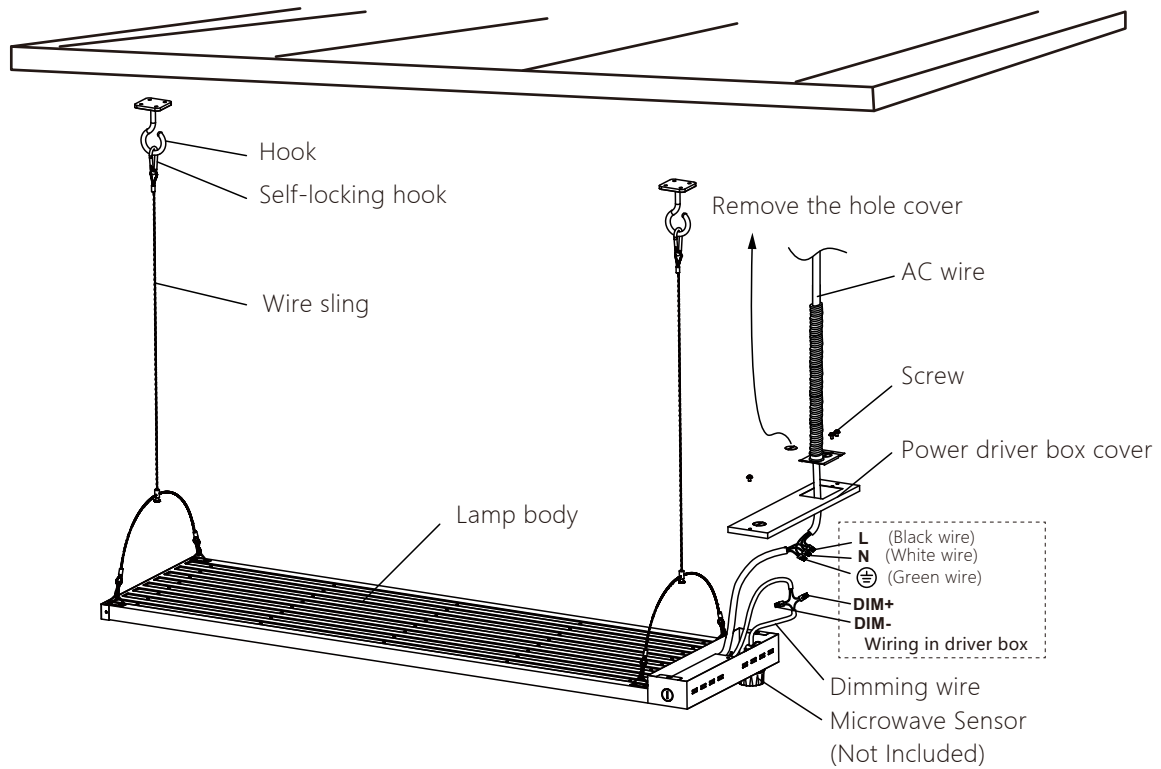

Rotate and install according to sensor "OPEN, CLOSE" identifier



 Options		
 Microwave Sensor	 PIR Sensor	 Remote Control

LINEAR HIGH BAY LIGHT LL3

Wiring diagram

Wiring Connection

Turn off the power, connect AC wire.

Dimmer connection (With dimmable driver.)

1. Compatible with 0-10V dimming.
2. Connect wires as shown.

