


AgriEid Stick Reader


Operation Manual

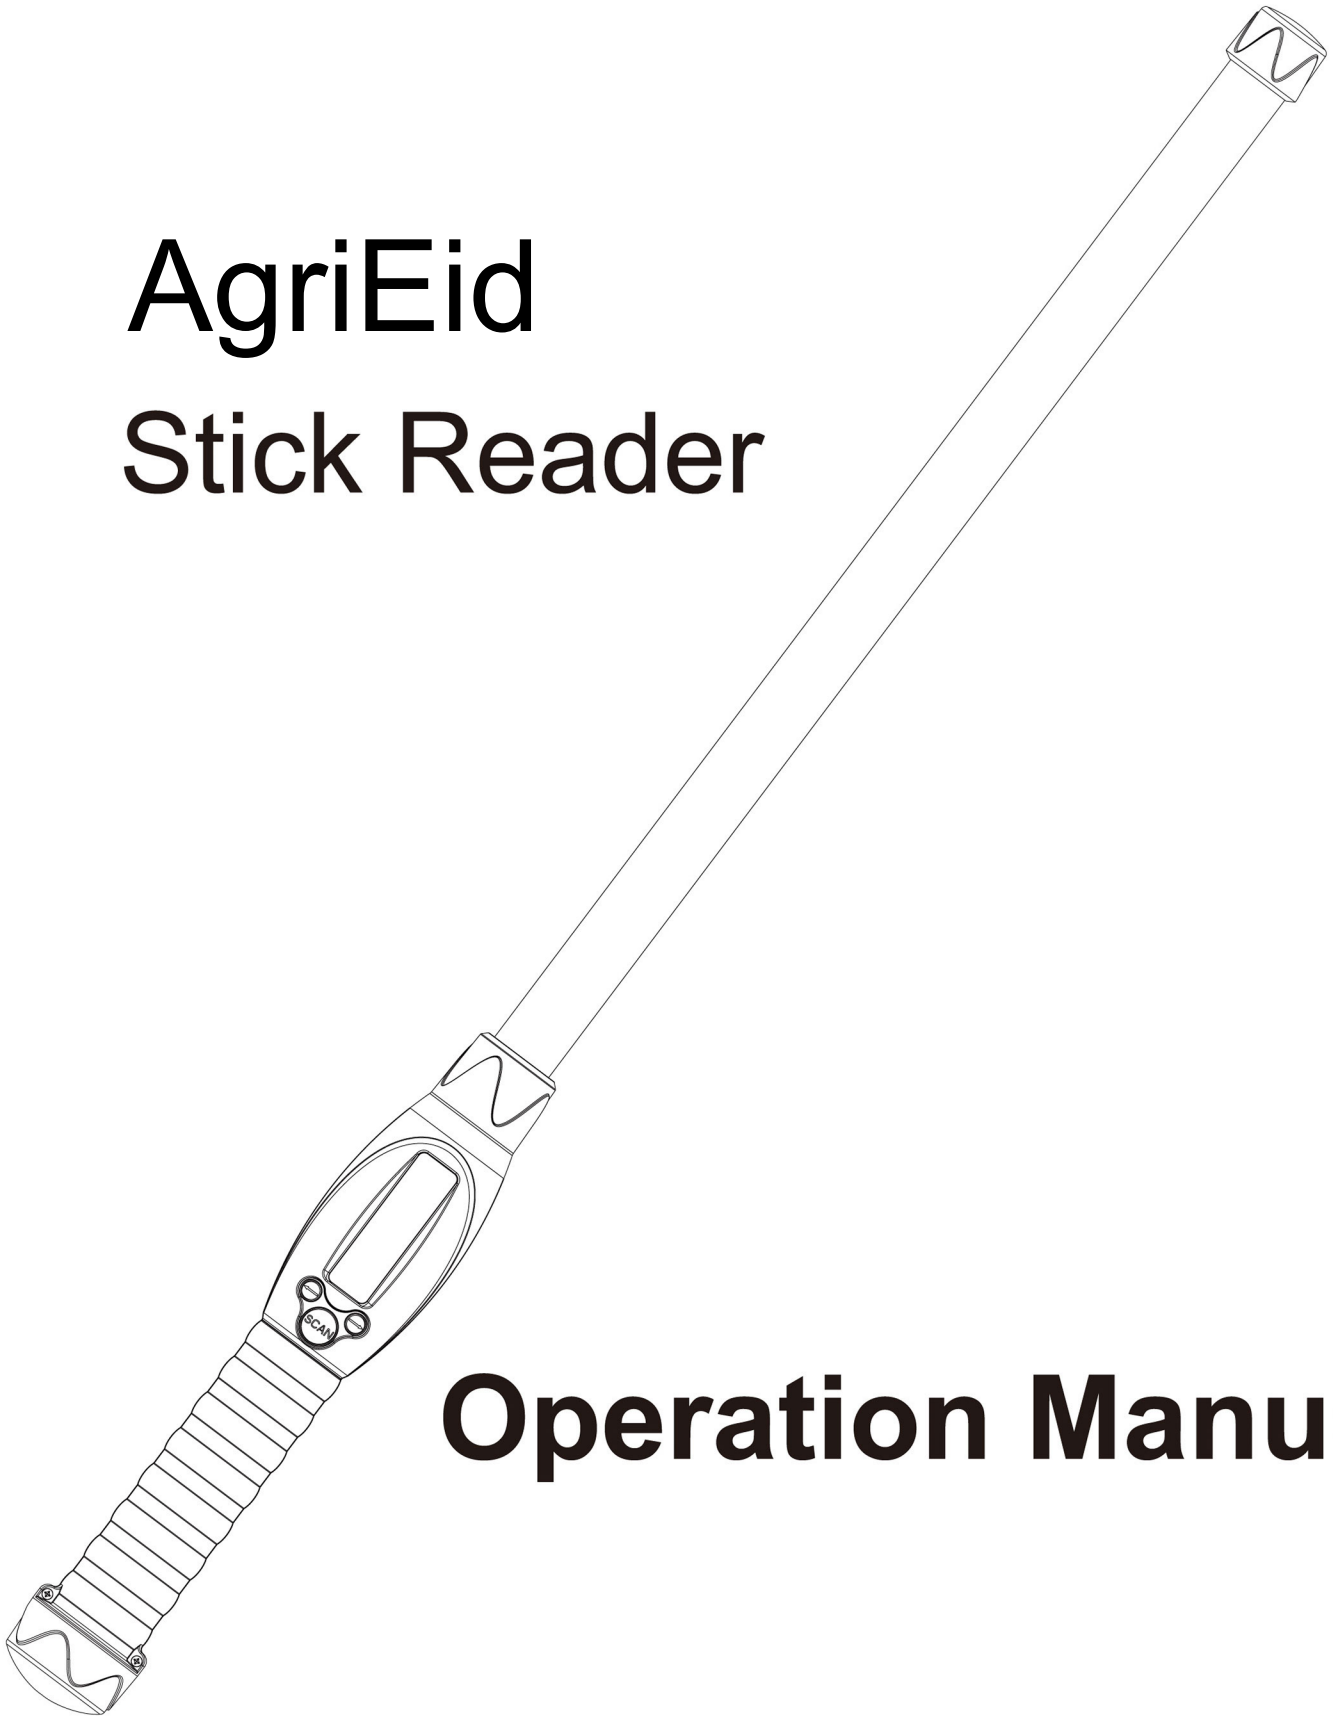


①

Product Introduction

Comfortable hand feeling ;
Clear OLED display;
Three-button easy operation;
Long reading distance;
Perfect operation interface;
Easy&Convenient secondary;

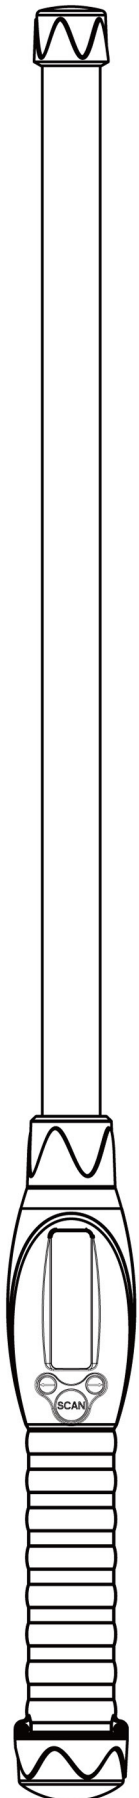

Holistic View

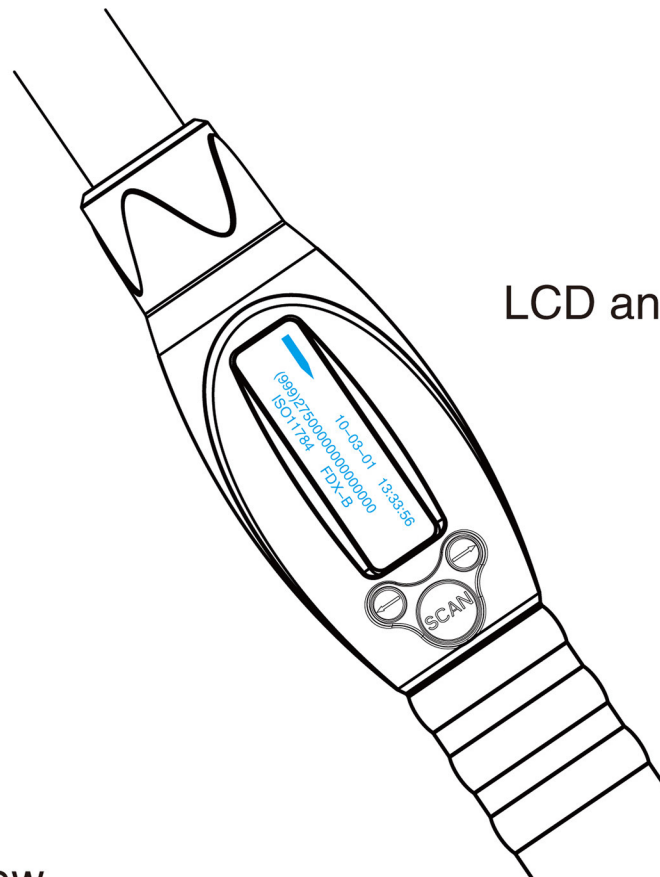


LCD and Button

2

Battery Installation


1

Unscrew the back cover

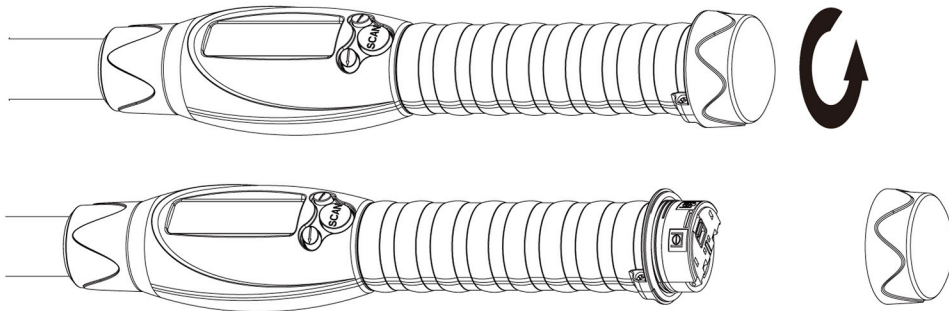


2

Open the battery cover

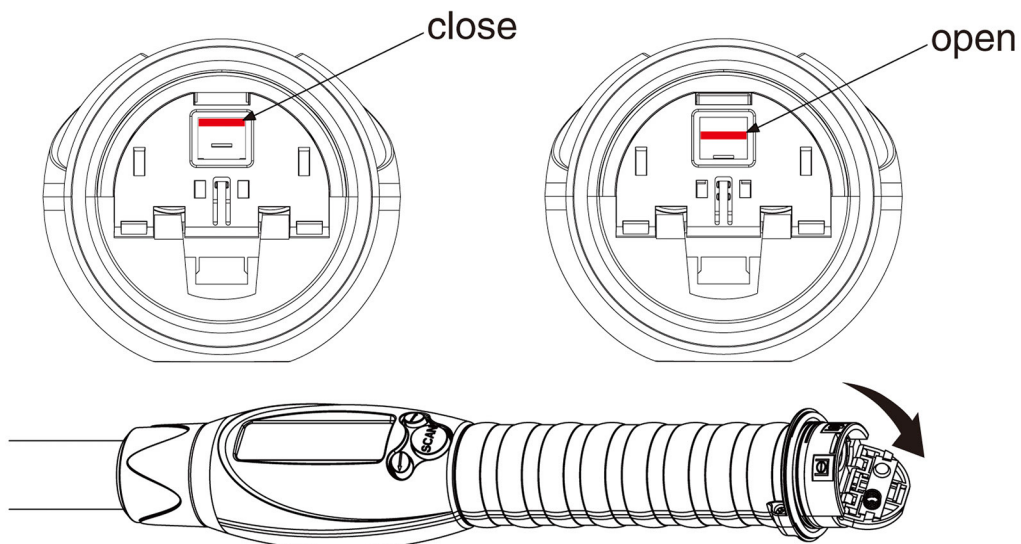


3

Load the battery

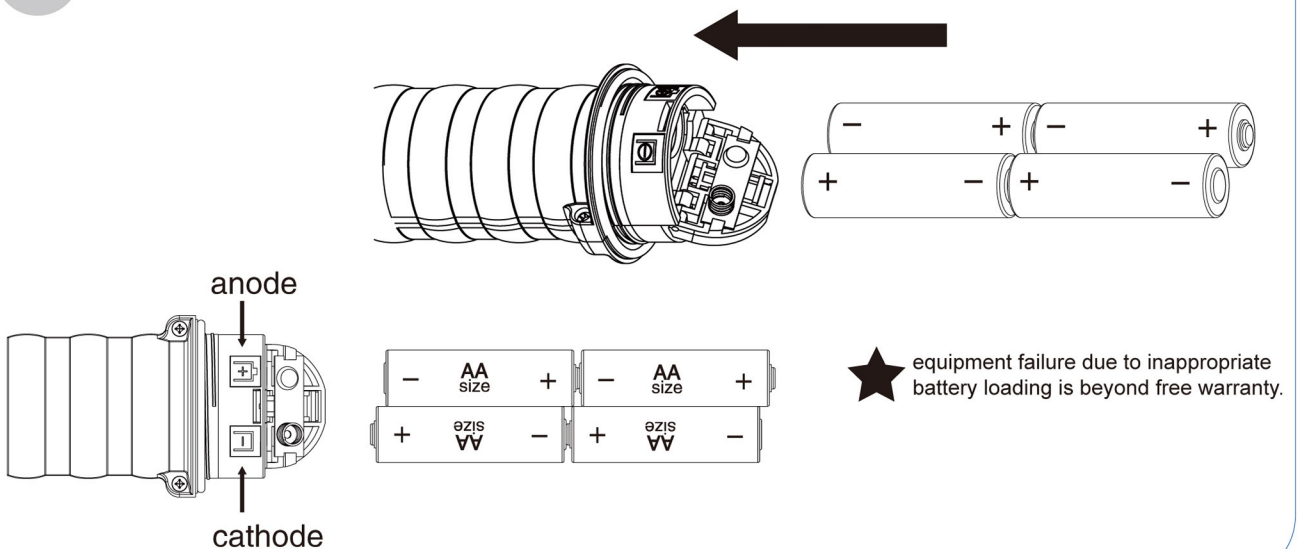

3

Screen Display

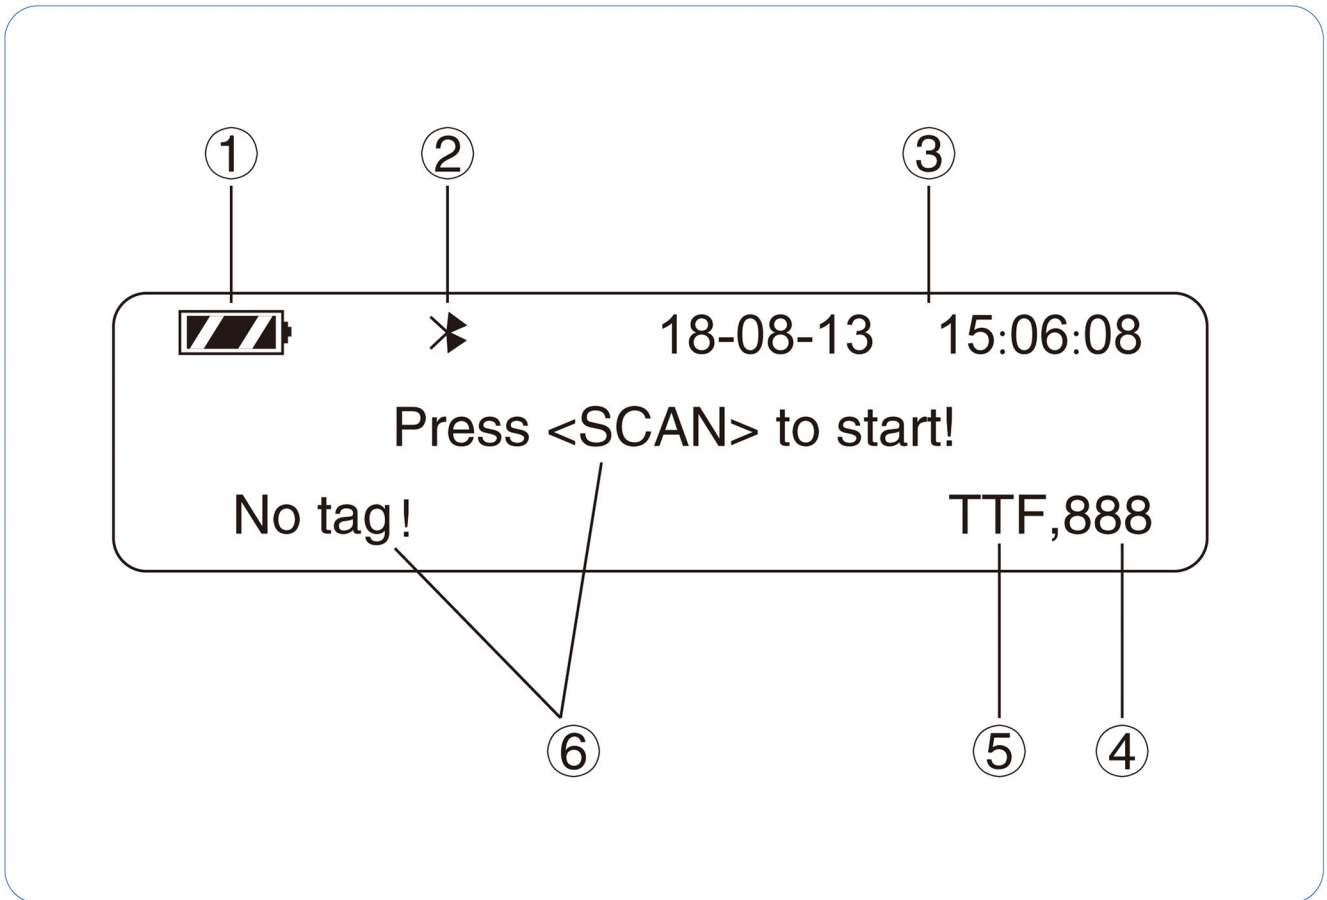


- ① Battery power
- ② Bluetooth signal
- ③ Time&date
- ④ Records
- ⑤ Current scanning mode
- ⑥ Current operation information


4

Scanning


1 Press **SCAN** and enter the scanning status.

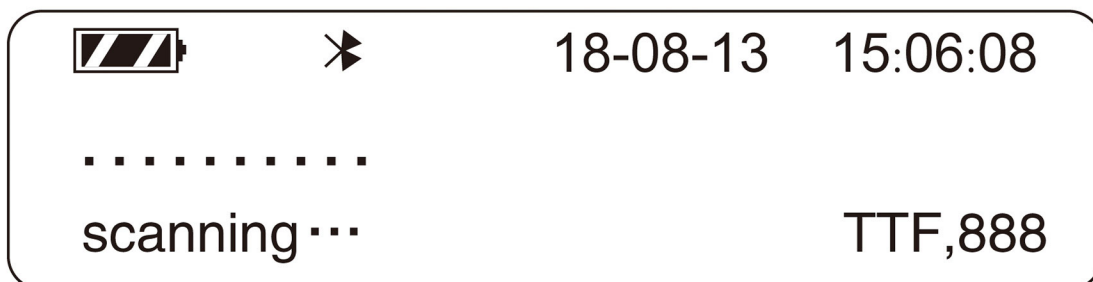

2 If there's no tag detected within 1min, it enters the following interface, press **SCAN** to enter scanning status again.

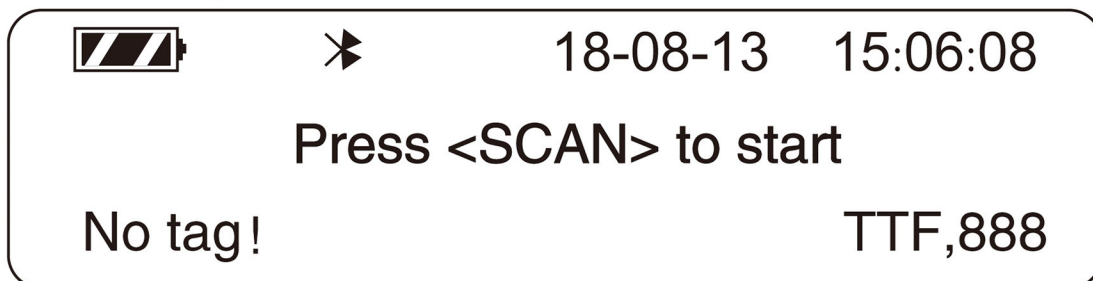

3 Tag number will be displayed if it is detected, press **SCAN** to scan the next tag.

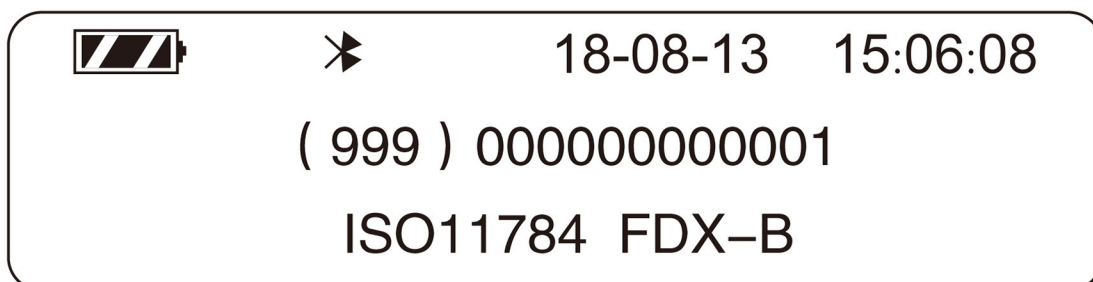






5


Menu Setting

1 Press  to enter the menu setting interface.





2 Press  choose the option(mark "★"), press  to enter. Press  to return to the previous menu.

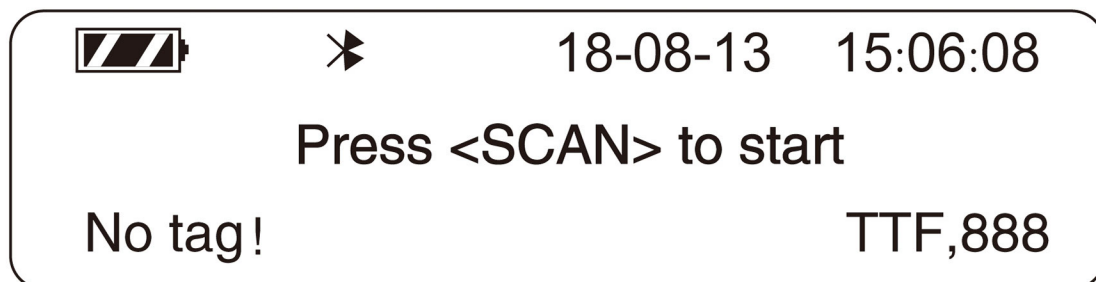
3 Shortcuts of language switching: in the following interface, long pressing  and in the meantime pressing  to switch the language



⑥

Menu Description

- 1 Record list: enter the record menu, press  &  to check the records.
- 2 Settings:
 - (1)Language: operation language choice
 - (2)Task
 - (3)record option: there're "YES"& "NO"two modes. Under "NO" mode, the same tag number will be recorded only once if it is multi-read.Under "YES" mode, the same tag number will be recorded many times if it is multi-read. "NO" is the default mode.
 - (4)Time: set the time and date.
 - (5)Buzzer: the default mode is "open" .
 - (6)Indicator light: you can set whether the light is on when reading a tag
 - (7)USB keyboard simulation: when it is under "open" mode and connected to the computer through USB, the device has the keyboard simulation function.
 - (8) Power management: shut down delay setting, the range is "1-20" minutes.
 - (9)Clear all the records: clear all the records in the device.
 - (10)Firmware upgrade: device software upgrade. If needed, please operate under manufacturer' s guidance.
- 3 Device info: the device number (bluetooth number) and version number is for maintenance use by the manufacturer.
- 4 Power off: shut down the device.

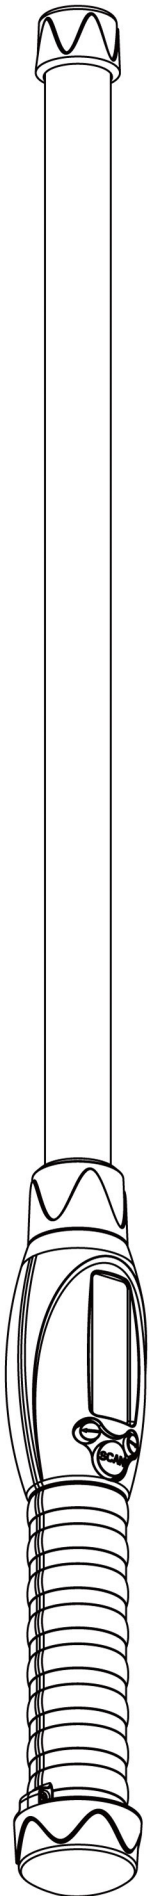

USB
UNIVERSAL SERIAL BUS



 **Bluetooth™**

Bluetooth connection password:1234