


1X4 SELECTABLE CEILING PANEL

Easily replace outdated tubes and fixtures with this dimmable, lightweight 1x4 LED Panel. Optimize focus and productivity in your space by adjusting the brightness (30W, 40W, 50W) and selecting the best color temperature (3500K, 4000K, 5000K) to suit your needs.


MODELS

PN14_SW-WH-3550K

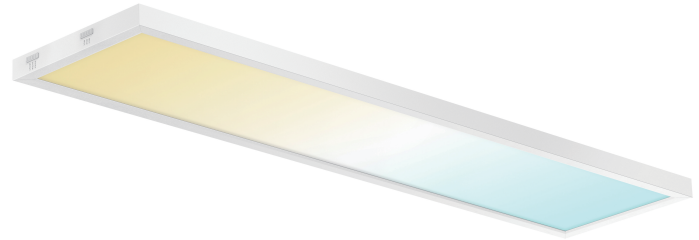

LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

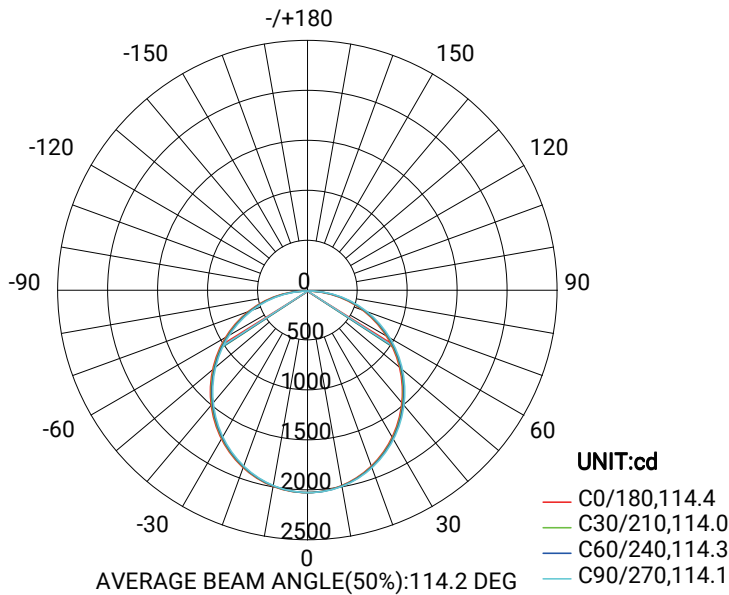

SPECIFICATIONS

Voltage	120-277VAC
Wattage	30/40/50W
Power Factor	>0.9

LIGHTING PERFORMANCE

Lumens	3750/5000/5700lm
CCT	3500 K, 4000 K, 5000K
CRI	80+
Beam Angle	120°
Dimmable	0-10V
Efficacy	110 lm/W

ENVIRONMENT

Operating Temperature	-4 °F to 113 °F
Moisture Rating	Damp Rated

CONSTRUCTION

Housing Material	ALU6063+SPCC+PS
Weight	5.25 lbs

LIFESPAN

Average Lifetime	50,000 Hours
Warranty	7 Years

CERTIFICATIONS

