


2X2 DUAL SELECTABLE LED PANEL


Brighten your environment with the 2x2 Dual Selectable LED Panel by Sunco. The ultra-bright and ambient features offer various lighting preferences for your space. Select from various color temperature choices (4000K, 5000K, 6000K) that fit your desirable mood. Recessed installation is suitable for indoor spaces, low-bay applications, T-grid and drywall ceilings.

MODELS

PN22_DU-WH-4060K

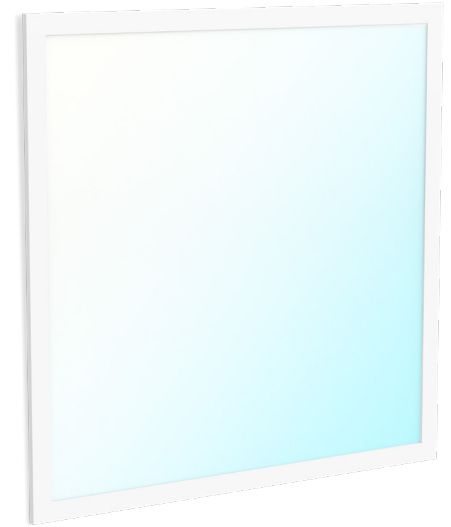

LIGHT DISTRIBUTION ANGLE

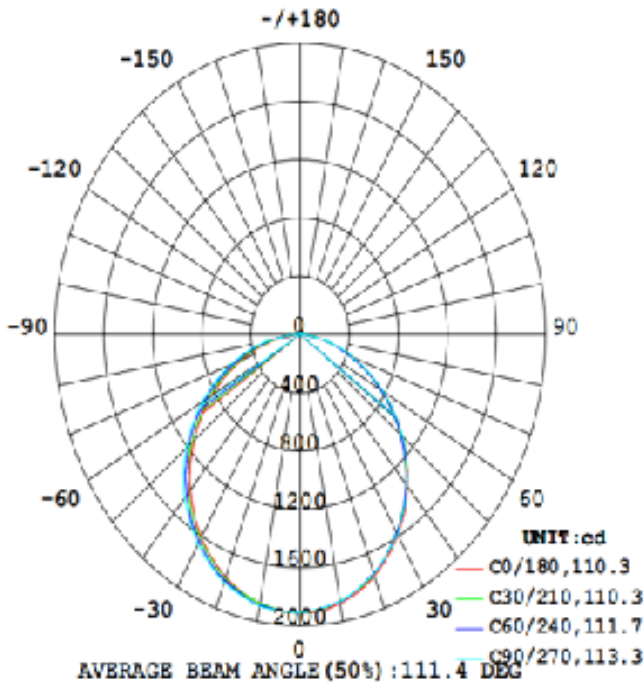

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS



SPECIFICATIONS

Voltage	AC120 - 277V
Wattage	30W/35W/40W
Current	0.367A
Power Factor	>0.9

LIGHTING PERFORMANCE

Lumens	5,000 LM
Equivalency	150W
Frequency	50/60 HZ
Color Rendering Index	80
Beam Angle	120°
Dimmable	0-10V
Efficacy	125 LM/W
Color Temperature	4000K/5000K/6000K

ENVIRONMENT

Operating Temperature	-4° F - 113° F
Moisture Rating	Damp

CONSTRUCTION

Housing Material	SPCC
Weight	3.99 lbs

LIFETIME

Average Lifetime	50,000 hrs
Warranty	7 Years