




January 1, 2005

The STX104-ND is a **High-Reliability PC/104** 16 channel 16-BIT A/D card that incorporates a large 1M sample FIFO. The list below briefly highlights many key advantages:

- **Industry Standard Form Factor.** Compliant to the PC/104 standard form factor ensuring consistent system packaging
- **Long-Term Product Availability.** Apex Embedded Systems is committed to delivering long life cycle products.
- **1 MegaSample FIFO.** Huge A/D FIFO enables applications to run without data loss even under long interrupt latency conditions.
- **Designed for operation in harsh environments.** All components and materials used in our products are designed to operate in the extended and/or mil-spec temperature range, under high shock and vibration without up or de-rating of any materials.
- **-40 to 85° C Operating Temperature.**
- **No tantalum or electrolytic capacitors used in the design.**
- **FPGA customization available.**
- **LED Read/Write Status indicator.** An LED displays card activity which is useful for both product development and field service status.
- **16 single-ended or 8 differential analog input channels with 16-bit resolution.**
- **Programmable input gain**
- **Very low noise analog inputs:** Less than 1.5-LSB RMS over all input ranges (1.1-LSB RMS typical). Noise reduction to 0.6-LSB RMS can be achieved using the jumper selectable sixteen sample moving average filter.
- **200,000 samples per second maximum A/D sampling rate.**
- **Analog input read via software, interrupt or DMA.**
- **16-bit data read (ADC data) operations** double effective PC/104 bus bandwidth
- **Burst mode** with only one interrupt generated per complete scan, thus reducing interrupt overhead and increasing effective throughput.
- **16-bit data write (DAC data) operations** reduce software overhead

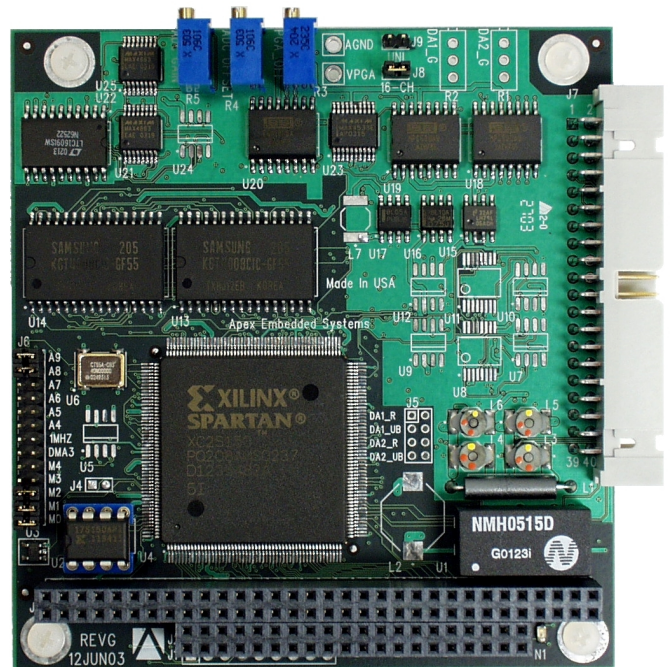

- **Four digital inputs**
- **Four digital outputs**
- **16-Sample moving average filter for data noise reduction** (jumper selectable)
- **One 32-bit counter/timer for A/D pacer clock**
- **One 16-bit general purpose counter/timer**
- **Software compatibility with:** ComputerBoards CIO-DAS1602/16, DAS-16/16jr PC104-DAS16JR/16, DAC-02 and Keithley DAS-16.
- **Single +5V Supply Operation**
- **Polarized Locking I/O Connector**
- **Designed and manufactured in Wisconsin by Apex Embedded Systems.** We will do whatever we can to assist you in designing in our products.
- **STX104-ND truly offers the "best-value" and in PC/104**

Apex Embedded Systems

116 Owen Road

Monona, WI 53716

Voice: 608-256-0767 EXT 22

FAX: 608-256-0765

sales@apexembedded.com

<http://www.apexembedded.com/>

Technical Specifications:**Analog Inputs**

ADC Resolution: 16-bits (1/65536 of full scale). No missing codes guaranteed

Number of Channels: 8 differential or 16 single-ended

Input Ranges: Bipolar: $\pm 10V$, $\pm 5V$, $\pm 2.5V$, $\pm 1.25V$;
Unipolar: 0 to 10V, 0 to 5V, 0 to 2.5V 0 to 1.25V

Input Bias Current: 50nA maximum

Absolute Maximum Input Voltage: $\pm 35V$

Integral Linearity Error: ± 1.5 LSB (± 3 LSB on 1.25V range)

Differential Linearity: ± 1 LSB

Polarity: Unipolar/Bipolar jumper selectable.

Input Sensitivity: 19 μ V

Noise Characteristics: Gaussian behavior with maximum peak-to-peak internal noise of less than 1.5-LSB RMS over all input ranges and operating temperatures (1.2-LSB RMS typical). Jumper selectable 16-bit moving average filter drops noise to less than 1-LSB RMS over all input ranges and operating temperatures (0.6-LSB RMS typical).

Input Type: True differential or single-ended

Input Impedance: (1) Differential: 20M Ω min. resistance in parallel with 47pF; (2) Single-Ended: 20M Ω min. resistance in parallel with 27pF.

Accuracy: 0.003% of reading, ± 1 LSB

Gain Drift: ± 7 ppm/ $^{\circ}C$

DC Drift or Zero Drift: ± 2 ppm/ $^{\circ}C$

Common Mode Voltage Range: $\pm 10V$

Common Mode Rejection Ratio: 70dB at 60Hz

Maximum Sampling Rate: 200,000 Samples Per Second (200KSPS)

ADC Conversion Time: 5 μ S

A/D Conversion Trigger: Programmable internal counter, external source (DIO/TRIG) or software polled.

A/D Trigger Sources: External polled gate trigger (DIO/TRIG)

A/D Trigger Modes: Gated pacer, software polled. (Gate must be disabled by software after trigger event)

Data Transfer: From 1MEG sample FIFO via interrupt, DMA or software read out.

Digital I/O

Number of Inputs: 4 TTL compatible

Input Voltage: Logic 0: 0.0V min, 0.8V max; Logic 1: 2.0V min, 5.5V max

Input Current: $\pm 1\mu$ A max

Number of Outputs: 4 TTL compatible

Output Voltage: Logic 0: 0.0V min, 0.4V max; Logic 1: 2.4V min, 3.3V max.

Output Current: ± 12 mA per line max

Counter/Timers

A/D Pacer Timer: 32-bit down counter (2 82C54 counters cascaded)

Clock Source Jumper selectable: 1 MHz or 10 MHz on-board clock source.

General Purpose: 16-bit down counter: (1 82C54 counter)

Interrupt/DMA Trigger: End of A/D Conversion

General

Operating temperature range: -40 to 85 $^{\circ}C$

Storage temperature range: -55 to 125 $^{\circ}C$

Factory Calibration: Full NIST Traceable

Humidity: 0 to 95% non-condensing

Power Supply: 5VDC $\pm 5\%$

Interface: PC/104 8 or 16-bit

Ordering Information

P/N: STX104-1MFIFO-DAQ-NODACS

Description: HIGH-REL 16-bit PC/104 Analog I/O Module with 1M sample FIFO

Apex Embedded Systems

116 Owen Road
Monona, WI 53716
Voice: 608-256-0767 EXT 22
Fax: 608-256-0765
sales@apexembedded.com
<http://www.apexembedded.com/>