

INSTALLATION GUIDE

PLED-TWL55W-BL, PLED-TWL55W-OR

PRODUCT FEATURES

High power LED Light with 5000 lumen light output; 16/3 SJTW 6FT cord; 5W Speaker.

PACKING | UNPACKING:


The iron legs snap securely into the slots at the top of the light.

To unfold:

1. Firmly pull the leg out of the slot.
2. Press the silver clip at the base of the light to allow the leg to unfold all the way down.
3. Once you release the clip, the leg will lock into place

To fold up the legs:

4. Press the silver clip and fold up the leg
5. Push firmly into the slot to lock in place

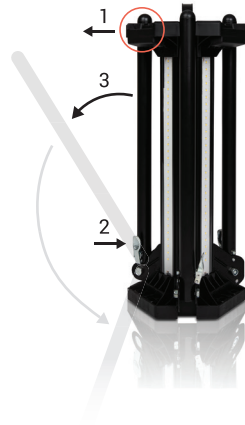

TO ILLUMINATE:

1. Plug in your LEDSONIC Tower Light to any outlet.
2. Our Tower Light has 3 modes of lighting. Using the red button:

- Press once to use one LED bar by itself
- Press a second time to use the second LED bar by itself
- Press a third time for both LED bars at the same time
- Press a fourth time to turn both LED bars off



TO LISTEN:

1. Bluetooth speaker is activated once Tower Light is plugged into an outlet.
2. On your smartphone, search for "LEDSONIC Tower" and hit connect.
3. Select your song or podcast on your phone and enjoy!

IMPORTANT SAFETY INSTRUCTIONS

WARNING: When using outdoor portable luminaires, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury, including the following:

- Only use three-wire outdoor extension cords that have three-prong grounding plugs and grounding receptacles that accept the appliance's plug.
- Ground Fault Circuit Interrupter (GFCI) protection is to be provided on the circuit(s) or outlet(s) to be used for the wet location portable luminaire. Receptacles are available having built-in GFCI protection and are able to be used for this measure of safety.
- Only use the following extension cord types: SW, SW-A, SOW, SOW-A, STW, STW-A, STOW, STOW-A, SJW, SJW-A, SJOW, SJOW-A, SJTW, SJTW-A, or SJTOW, SJTOW-A.

This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.