


2x4 Integrated Emergency Battery Panel


Feel secure with reliable light when it matters most. The 2x4 Integrated Emergency Battery Panel lasts longer than traditional fluorescents, offering flicker-free, high-quality lighting for facilities, hospitals, offices, and more. Thanks to its battery backup, the panels are ideal in emergency and safety situations.

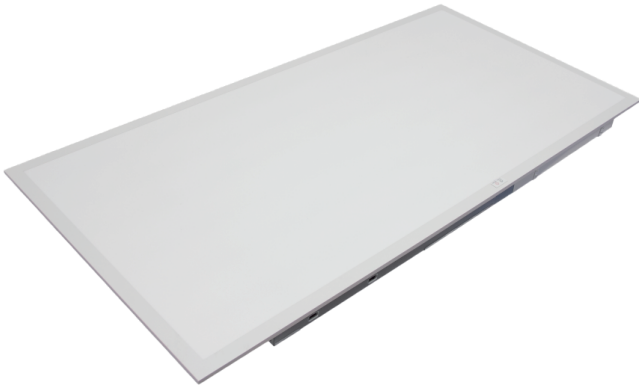

MODELS

PN24\_BT\_50SW-4060K

LIGHT DISTRIBUTION ANGLE

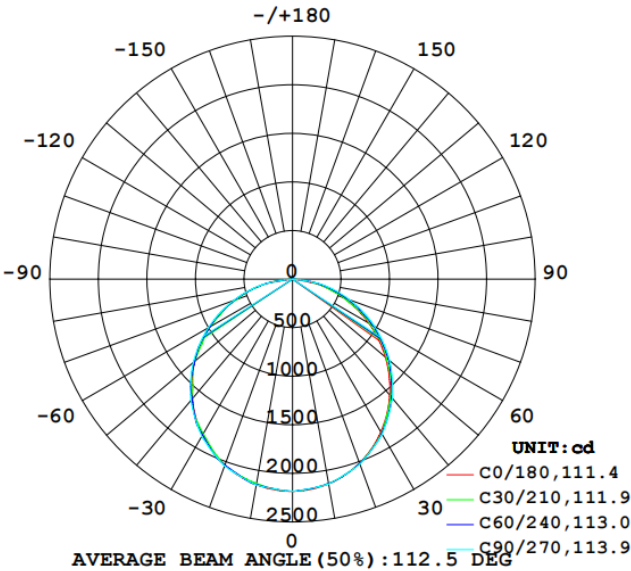

SPECIFICATIONS

Voltage	AC120-277 V
Wattage	30 W, 40 W, 50 W

LIGHTING PERFORMANCE

Lumens	4000 lm, 5100 lm, 6400 lm
CCT	4000 K, 5000 K, 6000 K
CRI	80+
Beam Angle	120°
Dimmable	YES
Efficacy	128 lm/W

ENVIRONMENT

Operating Temperature	32 °F to 113 °F
Moisture Rating	Damp Rated

CONSTRUCTION

Housing Material	SPCC
Weight	10 lbs

LIFESPAN

Average Lifetime	50,000 Hours
Warranty	7 Years

CERTIFICATIONS



## 2x4 Integrated Emergency battery Panel

BRAND	MODEL
Lutron	DVSTV
Lutron	NTSTV-DV
LEVITON	AWSMT-7DW
LEVITON	DD710-BDZ
LEVITON	DS710-10Z
Legrand	WS4FBL3PTC
Legrand	RH4FBL3PTC
Cooper	SF 10P
HUBBELL	LHD-IRS3-N-WH

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

\*May experience "pop-on" behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.