

2X4 LED HIGH LUMEN SELECTABLE CEILING PANEL


Replace inefficient fluorescent tubes with an abundance of radiant light and low-wattage backlit LED panel. Dustproof and 0-10V dimmable, this fixture also includes flexible mounting brackets for recessed installation. Use it in standard 2x4 drop ceilings for optimal brightness in offices, warehouses, hallways, and more.

MODELS

PN24_HO-4060K

LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

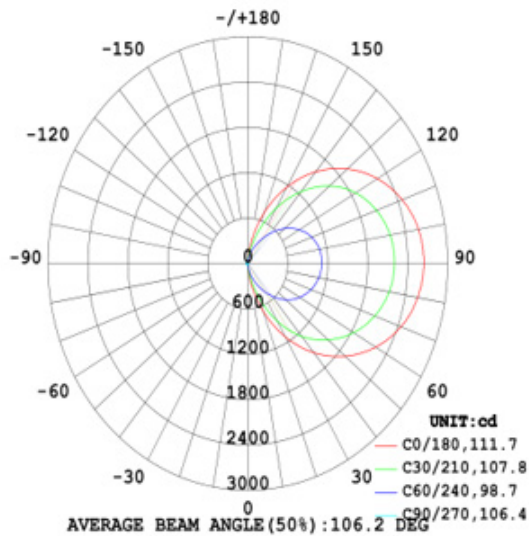

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS



SPECIFICATIONS

Voltage	AC120 - 277V
Wattage	40W/50W/60W
Power Factor	>0.90

LIGHTING PERFORMANCE

Lumens	7700 lm
Amps	0.66 A
Frequency	50/60 Hz
Color Rendering Index	80+
Beam Angle	120°
Dimmable	0-10V
Efficacy	125 lm/w
Color Temperature	4000K/5000K/6000K

ENVIRONMENT

Operating Temperature	- 4° F - 113° F
Moisture Rating	Wet Rated

CONSTRUCTION

Housing Material	SPCC
Weight	8.33 lbs

LIFETIME

Average Lifetime	50,000 hrs
Warranty	5 Years