

2x4 Retrofit Center Basket Troffers, Selectable


The 2x4 Selectable Basket Troffer provides uniform light in your office, home, or workspace. The matte finish of the fixture reduces glare, and the lens are impact-resistant.



MODELS

PN24_RTR_DU-WH-3550K

LIGHT DISTRIBUTION ANGLE

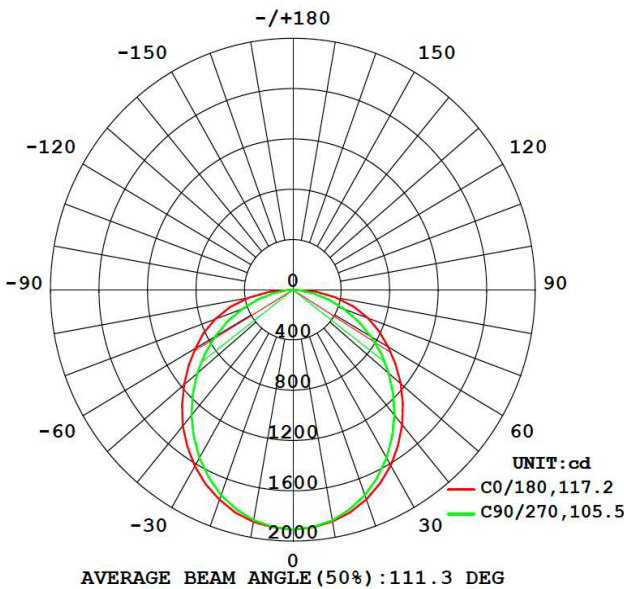

SPECIFICATIONS

Voltage	120-277 V
Wattage	34 W, 38 W, 45 W
Power Factor	>0.9

LIGHTING PERFORMANCE

Lumens	4600 lm, 5200 lm, 6000 lm
Selectable CCT	3500 K, 4000 K, 5000 K
CRI	80+
Beam Angle	110°
Dimmable	0-10V dimming
Efficacy	133 lm/W
Moisture Rating	Damp Rated

ENVIRONMENT

Operating Temperature	-40 °F to 122 °F
-----------------------	------------------

CONSTRUCTION

Housing Material	Metal Sheet
Weight	11.47 lbs

LIFETIME

Average Lifetime	50,000 Hours
Warranty	7 Years

CERTIFICATIONS



2x4 Retrofit Center Basket Troffers, Selectable

The 2x4 Selectable Basket Troffer provides uniform light in your office, home, or workspace. The matte finish of the fixture reduces glare, and the lens are impact-resistant.

BRAND	MODEL
LUTRON	DIVADVSTV
LUTRON	Maestro MS-Z101
LUTRON	Nova T NTSTV
LEVITON	ILLUMATECH IP710-LFZ
Philips	Sunrise SR1200ZTUNV

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience “pop-on” behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.