


BAT Standard Magnetic Tracker

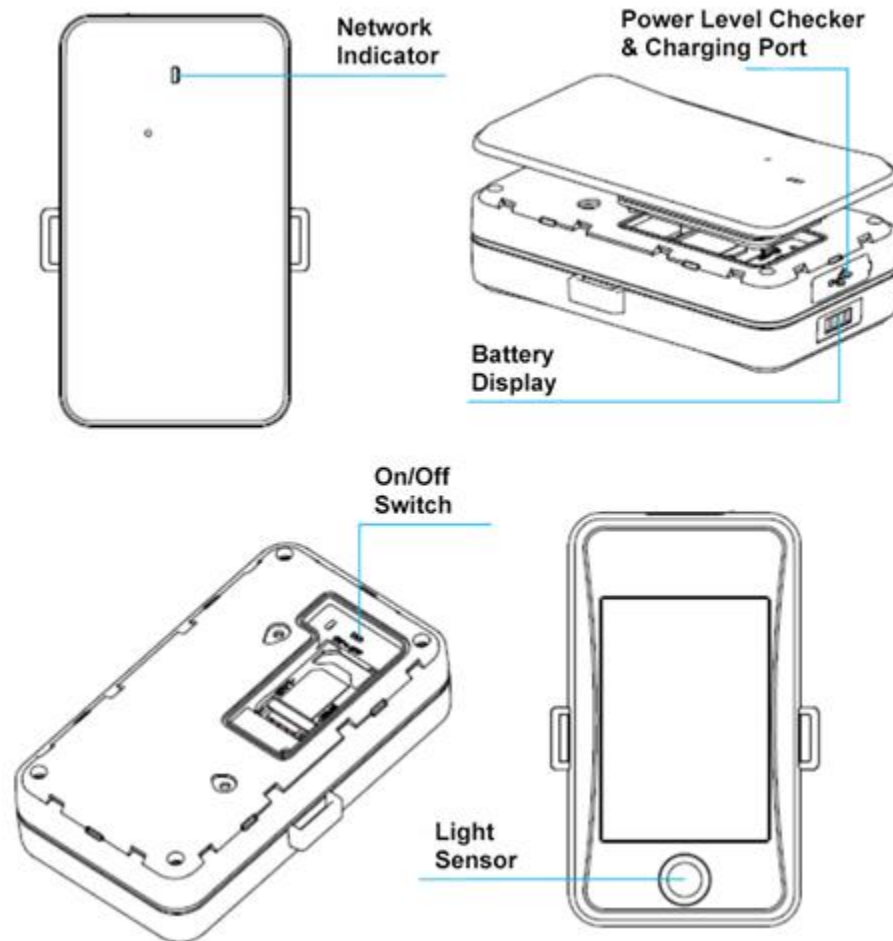

1. **POWER SWITCH:** The Power Switch is located under the removable cover and rubber stopper on the device. Before use, turn the switch to ON and replace the rubber stopper and cover. We do not recommend removing the cover unless absolutely required, as the cover is quite difficult to remove. To remove the cover, pull up from the slotted corner. You may need to use a flat screwdriver, coin or other tool to do so. This power switch is the only way to fully turn off the device. If removing the cover, make sure to replace the rubber stopper (which helps protect the internal electronics from adverse weather).
2. **POWER LEVEL CHECKER:** The external button (located beside the USB charging port) can be used to check the current battery charge, which will be shown on the Battery Display. This

button will also make the device check-in and update it's location.

3. **LIGHT SENSOR:** When the device is removed from a surface, the light sensor will detect light and trigger an Alert (if your account settings have this enabled).
4. **CHARGING:** Charge the device using the included USB cable. The battery is 10000mah, and a full charge can take up to 6 hours. The Battery Display will show the current charge level.
5. **OPTIONAL MOUNT:** The device itself has strong magnets built-in to attach to any magnetic metal surface. The device also comes with an optional mount (with mounting tape) to attach to non-magnetic surfaces.
6. The BAT Standard GPS Tracker wakes up to update its position every 8 hours, and goes to sleep in between to conserve battery power.

On TrackemPlus, TrackemLite or WhereSafe plans the device will also wake up and update every 2 minutes when moving.

The estimated battery life is up to 4 months if the device does not move (tracking stationary assets). The more driving or movement there is, the more the device is awake and reporting, which will drain the battery quicker.

BATTERY LIFE ESTIMATES				
Service	TrackemPlus	TrackemLite	TrackemAsset	WhereSafe
Movement Reports	2 minutes	2 minutes	None	2 minutes
Stationary Reports	8 hours	8 hours	8 hours	8 hours
Battery Life	2 – 6 weeks	2 – 6 weeks	Up to 4 months	2 – 6 weeks

* Additional battery saving modes are available upon request. One report every 12 hours or 24 hours will further extend the battery. Please contact us for more information.

BATTERY PERCENTAGE TO VOLTAGE COMPARISON										
100%	90%	80%	70%	60%	50%	40%	30%	20%	10%	0%
4.13v	4.08v	4.00v	3.91v	3.87v	3.81v	3.78v	3.75v	3.73v	3.70v	3.55v

* Use these voltage values to setup Battery/Supply Voltage notifications.

Questions or comments? Please contact Support at support@trackem.com or 1-866-868-7225.