

# Item#: 01009 LED CANOPY FUEL PUMP CANOPY LUMINAIRES

# **FEATURES**

- Adjustable wattage, 4 fixtures in 1!
- Energy efficient
- Low profile design
- Easy installation

## **APPLICATION**

Ideal for replacing traditional canopy fixtures.

### ELECTRICAL

Wattage	80W / 100W / 120W / 150W	
Voltage	120-277V	
Current	1.8A Max.	
Power Factor	0.9	
Total Harmonic Distortion (THD)	15	
LIGHTING PERFORMANCE		
Lumens	12080 / 15100 / 18120 / 22650	
Lumens Per Watt (LPW)	151	
Color Temperature (CCT)	5000K	
Color Rendering (CRI)	70	
R9 (Red Value)	-35	
Beam Angle	100° x 100°	
Light Distribution	Type VS	
BUG Rating (Backlight, Uplight, and Glare)	B4 - U2 - G2	
Dimmable Lighting Control	<b>(Dimmable</b> 0-10V, Range 10% - 100%	
ENVIRONMENT		
Operating Temperature	-40° ~ 104°F	
Suitable Location	WET	
Ingress Protection Rating	IP65	
LIFESPAN		
Average Life (Hours)	50,000	
Warranty (Years)	5	
COMPONENTS		
LED Light Source	Lumileds 2835	
Driver	DV-150E-054D	
CONSTRUCTION		
Housing	Aluminum Alloy	
Lens	Clear Glass	
Base / Power Supply	Hard Wired	
Finish	White	




Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

# Item#: 01009 LED CANOPY

#### **DIMENSIONS** (Inches)

Length	16"
Width	16″
Height	3.5″
Net Weight (Lbs)	

SUPPORTING DOCUMENTS (Grey = not available at this time.)				
Product Sheet	VIEW			
Install Instructions	VIEW			
IES Download from Web Item	VIEW			
LM79	VIEW			
LM80	VIEW			

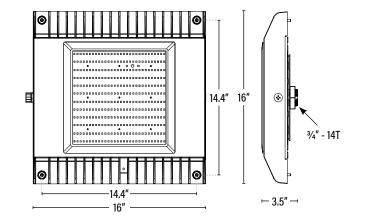

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768024982	17.7" x 17.3" x 4.9"	15
Country of Origin	China			
HS Tariff	9405.10.6020			

### ORDERING


ITEM#	DESCRIPTION	CASE
01009	LED CANOPY/80-100-120-150W/50K/DIMM/120-277V/WHT - <b>DLC</b> °	1

### **ADDITIONAL INFORMATION:**

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.

Default setting: 150W

• The wattage may be adjusted by the dip switches on the side of the fixture.



Dip switch positions are in white.