






FIRESAFE LED DOWNLIGHT SELV



THANK YOU for buying this LED product. To help ensure this luminaire gives complete satisfaction please only use it according to the following instructions, and then pass the instructions to the appropriate person for retention and future reference.

Warning

1. Installation only to be carried out by a qualified electrician
2. Please ensure surface is suitable and capable of holding the luminaire and driver weight
3. Pre-cut hole before installation, (see below chart for hole diameter)
4. Do not operate if product is damaged
5. IP65 rated front with bezel, suitable for bathroom zones 1 & 2, IP20 rear suitable for indoors
6. This product is suitable for fire rated installations, Part L Compliant of UK Building Regulations, Part B Compliant BS476 Parts 21 and 22 – Suitable for 30 minute 600mm/15mm single layer Standard Wallboard, 60 minute 600mm/12.5mm twin layer Fireboard and 90 minute 450mm/15mm twin layer Fireboard ceilings

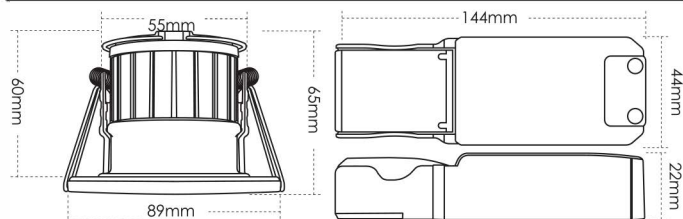

| Power (W) | Colour Temp (K) | Cutout Ø |
|-----------|------------------|----------|
| 8 | 3000, 4000, 6500 | 70-72 |

| | | |
|---|---|--|
| <p>1</p> <p>a. Switch off power b. Prepare cut-out hole in your surface to specified dimensions as stated in above table.</p> <p>c. Flip open the driver end cover to reveal push fit loop in/loop out terminal.</p> | <p>2</p> <p>a. Connect the driver to mains electricity in accordance with current wiring regulations. b. Flip driver end cover to closed position and push down firmly to lock wire in place. b. Insert driver in situ within the recess ensuring the pre-wired male connector is accessible.</p> <p>To 240V Mains</p> | <p>3</p> <p>a. Twist release the front bezel and select desired colour output via front mounted switch, then replace bezel: Left Position - DL - 6500K Central Position - CW - 4000K Right Position - WW - 3000K.</p> |
| <p>4</p> <p>a. Connect the male push fit connecting cable from the driver (i) to the female connecting cable attached to the luminaire (ii).</p> | <p>5</p> <p>a. Push the spacer loops (i) into the vertical position, to ensure minimum safe spacing. b. Push back the spring clips (ii) and insert luminaire into recess (iii).</p> | <p>6</p> <p>a. Ensure luminaire is a flush fit and has plenty of ventilation.</p> <p>7</p> <p>a. Switch power on at circuit. NB. For high voltage circuit insulation testing disconnect mains input supply first. (Do not circuit test using a Megger)</p> |
| <p>Changing Colour Temperature After Installation</p> <p>i. Ensure power is switched off. ii. Remove bezel and switch to desired colour temperature. iii. Replace bezel. iv. Switch power on.</p> | | <p>Environmental Protection</p> <p>Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.</p> |

Images are for information only. Phoebe LED shall not be held liable for improper operation of the luminaire in circumstances where procedures and specifications have not been followed correctly.