


★ PREMIUM ★ COLLECTION

Ultra Slim LED Flood Light

Please take time to read this leaflet carefully and retain it for future reference.

Diagram:

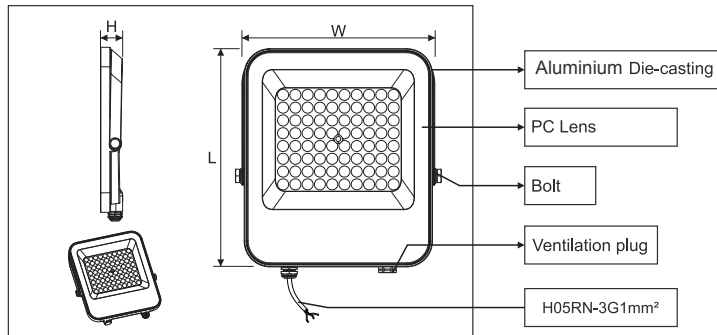

Specification:

Voltage	AC 220-240V ~50/60Hz				
Power factor	>0.9				
Wattage	30W	50W	100W	150W	200W
Lumen	3600lm	6000lm	12000lm	18000lm	24000lm
Lamp type	LED 2835 LUMILEDS				
CRI	>80				
Material	Aluminium Die-casting				
Beam angle	90°				
Products size	178x29x197.2mm	204.5x29x227.9mm	253x30.9x284.3mm	272x32x308.6mm	296.7x32.4x338.6mm
Colour Temp	6500K				
Work Temp	-20°C— +50°C				
Protection	IP65				
Housing color	Black				

Important Safety Information

- Do not wire this light into the lighting circuit - use a switched fuse spur.
- Before installation and servicing, disconnect the electrical supply at the mains.
- Carefully observe all instructions or warnings that are labelled on, or supplied with, your product.
- This product is suitable for outdoor use. If in any doubt, consult a qualified electrician.

Fixing instructions


- Do not wire this light into the lighting circuit - use a switched fuse spur.
- This fitting must be earthed. contact a qualified electrician to install a suitable earth facility.
- Ensure the electricity is turned off at the mains before installing or maintaining any electrical fitting.
- Please note: For new installations, check for any electrical cables or pipe work (gas/water) in the vicinity of the intended mounting point for this product, before proceeding with the installation.

General Information

Do not mount ceiling/wall fittings onto damp surfaces such as newly painted or plastered areas as this may cause discolouration of the finish.


Tools which may be required:

- Drill
- Cross Head Screwdriver
- Small Electrical Slotted Screwdriver
- Insulation Tape

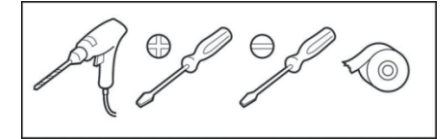


Installation:

1. Fasten the adjustable bracket with stainless steel screws

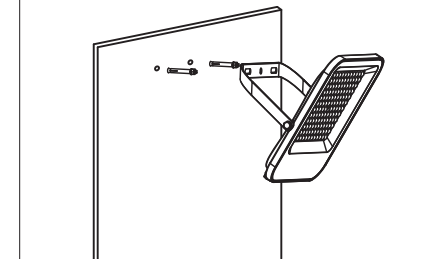


2. Connect the Main Line to the power wire of the lamp.

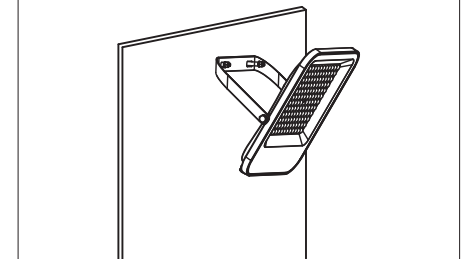

Note: before installation.

3. Only use a **round cable supplied** to connect this fitting. (6mm Diameter minimum.)




This is required in order to create a good water seal when connected to the fitting.


4. Ensure the terminal connection is made inside a suitable IP66 rated junction box. (not included)

From Floodlight

From IP66 Rated Junction Box



5. Connect the Main Line to the power wire of the lamp.

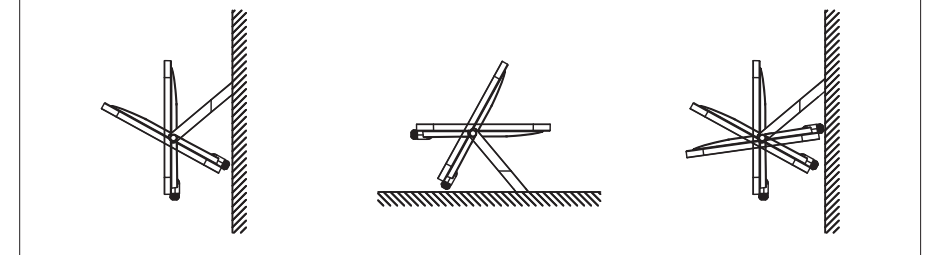

This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)