

## WARNING & NOTICE

- 1.Do not look directly at the LED light for a long period of time or it may damage your eyes.
- 2.Do not attempt to disassemble or remodel the product. Any changes can be dangerous and will void the warranty.
- 3.Please keep the product away from flammable items, explosion or Injuries may occur.
- 4.Please switch to the OFF position when the unit is not in use for a long period of time.

## PRODUCT SPECIFICATION

Material	ABS	Solar Panel	2.2x2.2 inch x3pcs/ 1W
Battery	Li-ion battery 18650 2200mAh	Waterproof Performance	IP65
Size	Main body: 7.6x7.6x15.23 inch  Lamp base: 3.94x3.94x2.41 inch	Accessories	1*Light main body 1*Lamp base 1*Bracket kit 1*User manual 1*Mounting sticker 2*Screws/2*Anchors

This product has a 1-year limited warranty. For further information please visit our website at [www.techkogroup.com](http://www.techkogroup.com)

Copyright Reserved

Patent Pending: US 16/279.107;CN201920118689.6

Solar Wall Pillar

# USER MANUAL



Model: SKL-501

✉ [support@techkogroup.com](mailto:support@techkogroup.com)

- ▲ Please carefully read this manual before using the product.
- ▲ Keep the manual with you for reference as needed.

### PLEASE FULLY CHARGE THE PRODUCT BEFORE USING

1. Secure the unit and fully charge in direct sunlight and select desired operating mode(flame or still) before use.
- 2.Charging time may vary depending on the weather, temperature and seasons.
- 3.Do not place the product indoors or any place where there is no direct sunlight, the product will not charge properly.
- 4.Keep the solar panel clean to ensure the product can be properly charged. Frequently clean the solar panel as needed. Avoid scratching on the panel or it may lower charging efficiency.

## INSTALLATION INSTRUCTIONS


### OPTION # 1 (Lamp)

(Please see Figure A for reference)


- 1.Connect the solar torch light main body to the supplied lamp base.




### OPTION #2 (Wall with Bracket Kit)

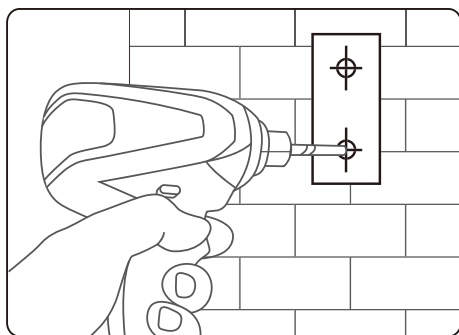


1. Place the mounting sticker in a location where the product will be installed to. Then drill 2 holes into the guides shown on the mounting sticker.

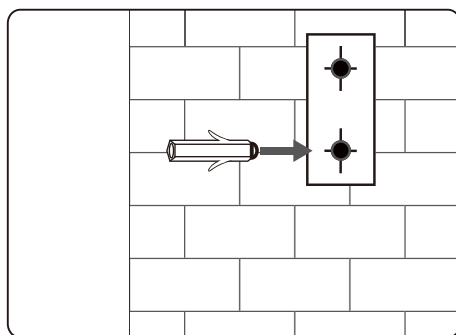

2. Insert the supplied anchors into the drilled holes.

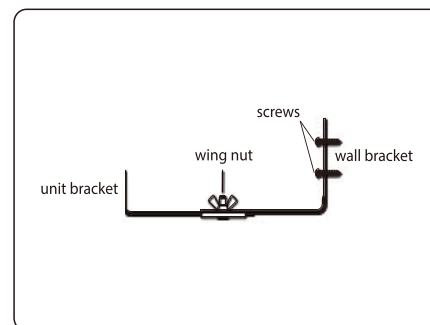

- 3.Place and align the wall bracket against the wall and then use a screwdriver to secure the bracket with the provided screws. Adjust the provided wing nut and the unit bracket to the desired length and then tightly secure. Make sure the unit bracket is pointing upward.

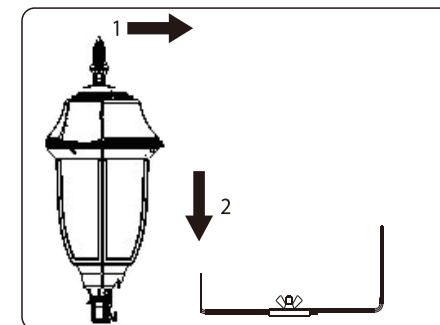

- 4.Push the back of the solar unit against the unit bracket, then slide the unit down to secure the unit to the bracket.

▲ Please install the unit in a place where the solar panel can be continually exposed to the sun.

▲ Avoid placing the unit where shade from buildings or objects would block the solar panel.

### SWITCH & FUNCTIONS

(Please see Figure B for reference)

1. Flame Mode: Slide switch to the “Flame” position. The light will illuminate with a flickering flame effect.
- 2.Still Mode: Slide switch to “Still” position, the light will stay illuminated. Please note all LED’s will not be illuminated in this setting.
- 3.Off Mode: Slide switch to the “Off” position, the light power is off.

▲ The switch is on the top of the solar unit.

▲ The product can be charged in all operating modes. The solar panel is equipped with daylight sensor. The product will charge in direct sunlight during the daytime and automatically turn on at dusk.

