

Item#: 10155 LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER RETROFIT INTEGRATED RETROFIT KITS FOR 2X4 LUMINAIRES

FEATURES

Spec-Select™ Troffers feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

ELECTRICAL

Wattage	34W / 38W / 45W
Voltage	120-277V
Current	0.38-0.16A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	4250 / 4750 / 5625
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	6
R13 (Skin Tones)	
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	
Dimmable Lighting Control	(Dimmable 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4 ~ 122°F		
Suitable Location	DAMP		
Ingress Protection Rating	IP40		

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5
COMPONENTS	

COMPONENTS

LED Light Source	
Driver	

CONSTRUCTION

Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS





Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: 10155


LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER RETROFIT

DIMENSIONS (Inches)

Length	47.8"
Width	23.9"
Height	3.1"
Net Weight (Lbs)	14

SUPPORTING DOCUMENTS (Grey = not available at this time.)

COLL OIL ING DOCOMENTO (arcy – not available at this time.)	
Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

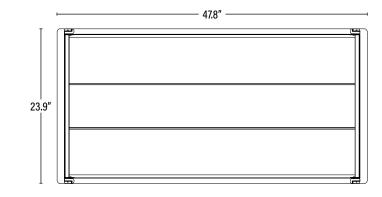

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768024999	48.5" x 24.4" x 3.3"	17.6
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
10155	LED 2X4 SPEC-SELECT™ CENTER BASKET TROFFER RETROFIT/34-38-45W/35-50K/DIMM/120-277V - DLC °	1
ACCESSORIES		
09355	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN- SPLIT TYPE/L - T20C	10
19355	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN- SPLIT TYPE/L - T20C	10
29355	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN- SPLIT TYPE/L - T20C	10

ADDITIONAL INFORMATION:

- Default settings; 45W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

