



Item#: **32129**
LED HIGH WATTAGE 180° LAMP
 REPLACEMENT LAMPS FOR OUTDOOR POLE/ARM
 MOUNTED DECORATIVE LUMINAIRES (TYPE B)

FEATURES

- Environmentally friendly; uses less energy than a traditional lamp.
- 180° optical design that provides even light distribution.
- 350° rotating base for precise positioning
- Excellent heat dissipation.
- High lumen output.
- Only Dimmable on 120V.

APPLICATION

Replacement lamps for top post, high bays, parking lots and street lighting.

ELECTRICAL

Wattage	72W
Voltage	120-277V
Current	0.65A
Power Factor	0.9
Total Harmonic Distortion (THD)	20

LIGHTING PERFORMANCE

Lumens	11000
Lumens Per Watt (LPW)	153
Color Temperature (CCT)	5000K
Color Rendering (CRI)	82
R9 (Red Value)	5
R13 (Skin Tones)	--
Beam Angle	110°
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--

Dimmable Lighting Control

Dimmable
see compatibility report

ENVIRONMENT

Operating Temperature	-40° ~ 149°F
Suitable Location	DAMP
Ingress Protection Rating	IP40
Suitable Fixture Type	Enclosed
Suitable for Emergency Fixtures/Ballasts	No

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Bridgelux
------------------	-----------

CONSTRUCTION

Housing	Aluminum / PC
Lens	Clear
Base / Power Supply	E39 - Mogul

QUALIFICATIONS



Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **32129**
LED HIGH WATTAGE 180° LAMP

DIMENSIONS (Inches)

Length (MOL)	9.4"
Width	4.7"
Height	3.1"
Net Weight (Lbs)	--

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
Dimmer Compatibility	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

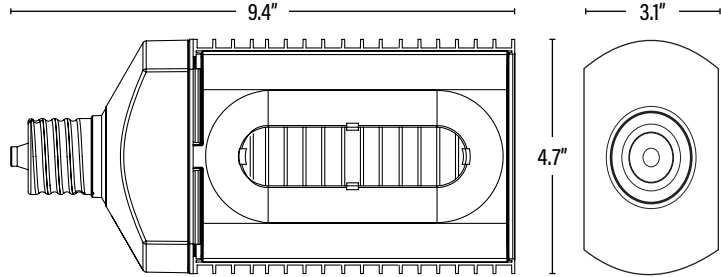

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768028895	22.3" x 12.4" x 4.9"	--
Individual Box	1	811768028898	5.9" x 4.1" x 10.7"	--
Country of Origin	China			
HS Tariff	8539.52.0010			

ORDERING

ITEM#	DESCRIPTION	CASE
32129	LED 72W/50K/180°/DIMM/120-277V/MOG - DLC®	4