



Item#: **50409**  
**LED 5W EMERGENCY  
 BATTERY BACKUP**

FOR LED LINEAR DIRECT WIRE T8 TUBES

**APPLICATION**

For use with one select LED T8 Direct Wire Tube (Type B).  
 Provides backup light during power outages.  
 See *compatibility list* below:

**INPUT**

Input Voltage	120-277V AC
Frequency Range	50/60hz
Max. Power	5.5W
Max. Standby Power	1.8W

**OUTPUT**

Output Power	5W
Output Voltage	40~100V DC
Emergency Time	90 Min. @ 5W
Output Voltage Protection	180V
Output Power Protection	Yes

**PERFORMANCE**

Compatibility	See list
Battery Type	Lithium Ion
Battery Capacity Available	850mAh 14.8V
Charge Current	160mA
Recharge Time Required	24 Hours Max.
Dimmable Lighting Control	

**ENVIRONMENT**

Operating Temperature	32° ~ 122°F
Suitable Location	<b>DAMP</b>
UL Conditions of Acceptability	Battery temperature must not exceed 122°F (50°C)

**LIFESPAN**

Warranty (Years)	<b>5</b>
------------------	----------

**CERTIFICATIONS**




*Specifications are subject to change without notice.*

Item#: **50409**  
**LED 5W EMERGENCY BATTERY BACKUP**

**DIMENSIONS** (Inches)

Length	9.5"
Width	1.3"
Height	1.2"
Net Weight (Lbs)	--

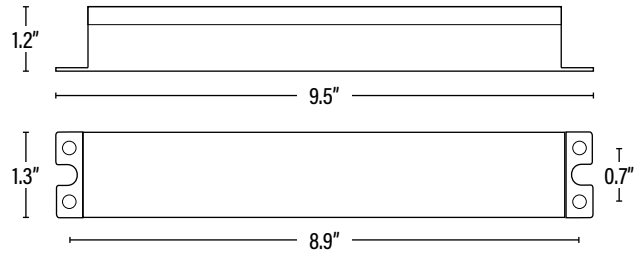

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	25	10811768028277	13" x 11" x 9.5"	24.3
Individual Item	1	811768028270	--	0.97
Country of Origin	China			
HS Tariff	9405.99.4090			

**ADDITIONAL INFORMATION:**

WIRE	LENGTH (in)
White	31.5"
Black-White	25.6"
Black	31.5"
Red	47.2"
Blue	
Purple	
Brown	
White	12.6"
White	