

LA CROSSE® TECHNOLOGY

Projection Alarm Clock with Indoor Temperature | Humidity



Welcome!

Congratulations on your new Projection Alarm Clock and welcome to the La Crosse Technology family! This product was designed with you in mind by our hometown team of weather enthusiasts based in La Crosse, Wisconsin.

Instructional Manual
Model: 616-1412v3
DC: 112017

Table of Contents

2	Custom Display Modes	6	Reset Button
3	Step 1: Power Up	6	Help Us, Help You!
3	Step 2: Set Time, Date, etc.	6	Let's Be Social!
4	Your Clock Features	6	Care and Maintenance
4	Projection Rotation Focus	7	Warranty and Support
5	Set Alarm	7	Specifications
5	Deactivate Activate Alarm	8	FCC Statement
5	Snooze	8	Canada Statement
6	Adjustable Backlight		

Custom Display Modes


Press and release the SET button to toggle between:

- Full weekday/temperature/humidity
- Weekday/Month/Date/temperature/humidity



STEP 1: Power Up

- 4.5 volt power cord (required) into your clock
- *2-AAA batteries for optional backup of your time and date

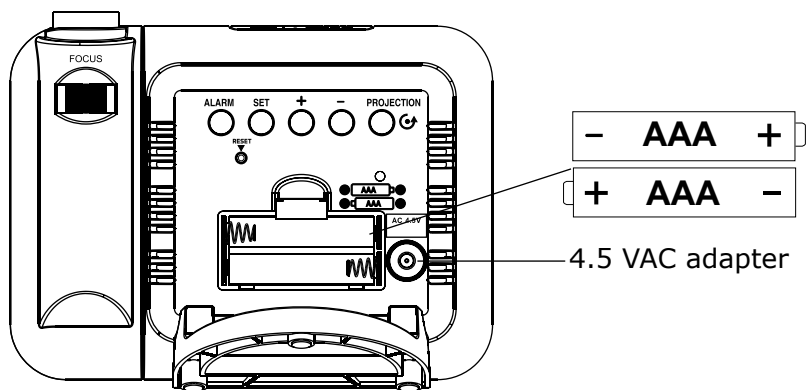

STEP 2: Set Time, Date, etc.

- Hold then release the SET button to enter time set mode.
- Press and release the + or - buttons to adjust the values. Hold to adjust quickly.
- Press and release the SET button to confirm and move to the next item.

Settings order:

1. 12/24 hour time format
2. Hour
3. Minutes
4. Year
5. Month
6. Date
7. Fahrenheit/Celsius

To begin: Hold the SET button 3 seconds to enter the settings:


1. 12/24 hour time




2. Hour




3. Minutes



4. Year



5. Month




6. Date



7. Fahrenheit | Celsius




Your Clock Features

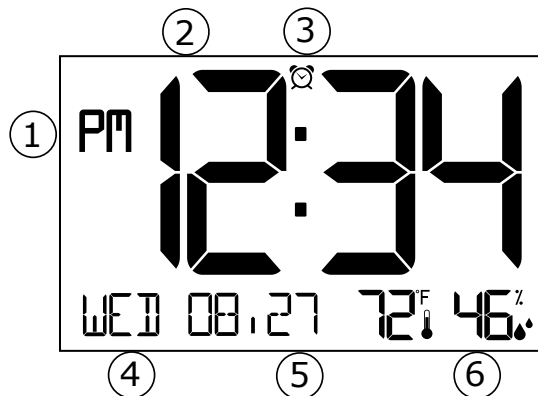

- ① AM/PM
- ② Time
- ③ Alarm
- ④ Weekday
- ⑤ Month/Date
- ⑥ Indoor Temperature | Humidity

Buttons

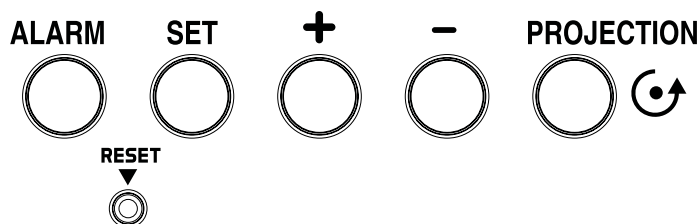

Projection Rotation | Focus



Tip: The AC adapter must be plugged in for the projection to work.

Rotate Projection:

- The projected image can be rotated in 90 degree increments.
- Press and release the PROJECTION button to rotate the image.

Focus Projection:

- Use the Focus Wheel on the back of the projection arm to provide a clear projection image.

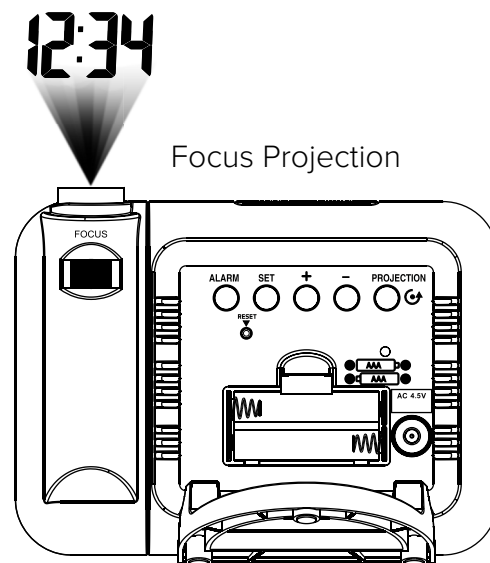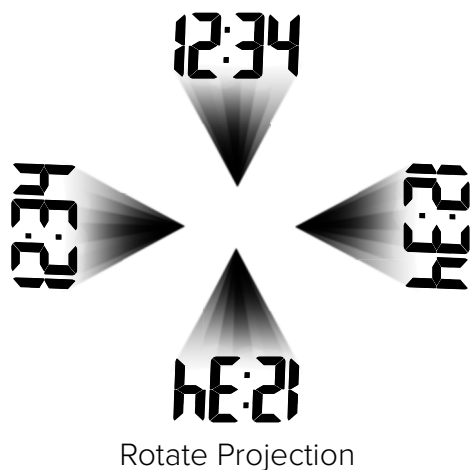


Set Alarm


- Hold then release the ALARM button to enter time set mode.
- Press and release the + or - buttons to adjust the values. Hold to adjust quickly.
- Press and release the ALARM button to confirm and move to the next item.

To begin: Hold the ALARM button to enter the settings:

1. Alarm Hour

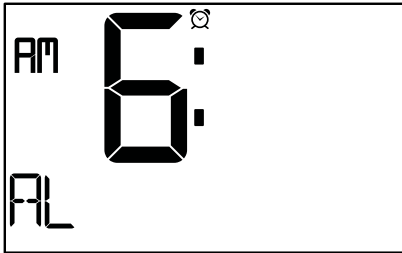



2. Alarm Minutes

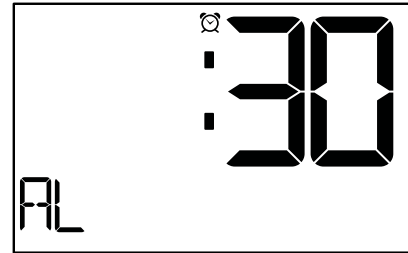

Deactivate | Activate the Alarm

The alarm will be active after setting. The alarm icon (clock) will show.

- To deactivate/activate, press and release the ALARM button to view alarm time.
- When alarm time is showing, press and release the ALARM button again to deactivate or activate the time alarm.



Active Alarm



Active Snooze

Snooze

When alarm is sounding, press SNOOZE LIGHT button to silence the alarm for 10 minutes.

- The snooze icon Zz will flash.
- Press any button except SNOOZE/LIGHT to silence the alarm for 24 hours.
- This is a crescendo alarm. It will sound for 2 minutes then shut off if no buttons are pressed.

Adjustable Backlight

- **AC adapter:** Backlight and projection are on constantly.
Press and release the SNOOZE/LIGHT button to adjust the backlight HI-LOW-OFF.
- **Batteries only:** Press the SNOOZE/LIGHT button for a 3 second backlight and projection.

Reset button

- If the clock display appears distorted or is not responding to buttons, use a pen or paper clip to press and release the RESET button one time.
- This will reset the clock to default settings.

Help Us, Help You!

If you have ideas for features or support solutions you'd like to see us make, please let us know! We truly want to make owning a La Crosse Technology product not only a practical experience, but also a fun one. So email us at: store@lacrossetechnology.com

Let's Be Social!

Follow us on our social media outlets for the latest promotions, product support, and awesome giveaways.



Care and Maintenance

- Do not mix old and new batteries.
- Do not mix Alkaline, Standard, Lithium, or Rechargeable Batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Replace all batteries of a set at the same time.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries are installed with correct polarity (+ and -).
- Remove batteries from equipment when it is not used for an extended period of time.
- Promptly remove expired batteries.

Warranty and Support

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

Before returning a product, please contact our friendly customer support with questions or visit our online help:

Phone: 1-608-782-1610

Online Product Support and Registration: www.lacrossetechnology.com/support

Specifications

Indoor

Temperature Range: 32° F to 122° F (0° C to 50° C)

Power

Clock: 4.5.0 Volt 500mA power cord included (Required)

AC6 GPU280450150WA00

Optional Battery Backup: 2-AAA batteries not included, backup for time and date

Battery Life: over 12 months with reputable batteries.

Dimensions

Clock: 5.9" L x 2.3" W x 4.4" H inch
(14.98 x 5.84 x 11.17cm)

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints.

The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences.

All trademarks and patents are recognized.

Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.