

LA CROSSE®
TECHNOLOGY


Pop-Up Projection Alarm Clock



SET UP GUIDE

MODEL: 616-1950v2

Overview

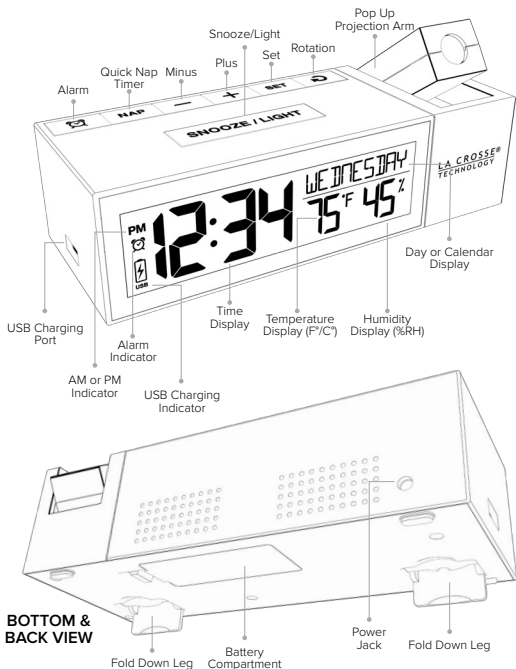

Power Up

1. Insert the power cord into an outlet, then into the back of your clock.
2. **Optional:** Install 2-AAA batteries (not included) into the bottom of your clock for backup power supply.

Settings Menu

IMPORTANT: Only press or hold one button at a time.

1. Hold the **SET** button until the display changes to enter the Settings Menu.
2. Press and release the **+** or **-** button to adjust the values.
3. Press the **SET** button to confirm adjustments and move to the next item.
4. Press the **SNOOZE/LIGHT** button at any time to exit.

Settings Menu Order:

- Language: English | Español
- Beep: ON | OFF
- Hour
- Minutes
- Year
- Month
- Date
- Fahrenheit | Celsius
- Snooze Duration (5 - 120 minutes)



SNOOZE / LIGHT

Language: Whichever language is selected, the following instructions and weekday will be presented in that language

Weekday: The Weekday will set automatically when the Year, Month and Date are set.

Backlight

Press and release the **SNOOZE/LIGHT** button to adjust the display's backlight intensity (4 levels or OFF).

Custom Display Settings

Press and release the **- (MINUS)** button to select Weekday or Calendar Display.



Weekday Display



Calendar Display

Projection Intensity & Rotation

Projection Intensity:


- Press and release the **↻ (ROTATION)** button to adjust the Projection Intensity (4 levels or OFF).

Projection Image Rotation:

- Hold the **↻ (ROTATION)** button to rotate your projected image in 90° increments.

Projection Arm:



- Push the Pop Up Projection Arm to view your projected time.
- Adjust the arm forward and backward







Projection
Arm Rotation

Time Alarm

Set Alarm Time

1. Hold the  (**ALARM**) button until the display changes to enter the Alarm Settings Menu.
2. Press and release the + or - buttons to adjust the flashing values.
3. Press the  (**ALARM**) button to confirm and move forward.

Activate/Deactivate Alarm:

- Press the  (**ALARM**) button once to view alarm time.
- While viewing the alarm time, press  (**ALARM**) again to activate or deactivate the alarm.
- When active, the Alarm Icon  will show, and will disappear when the alarm is deactivated.
- Press the  (**ALARM**) button to stop a sounding alarm for 24 hours.

Snooze

- When the alarm sounds, press the **SNOOZE/LIGHT** button to snooze the alarm for your preselected duration.

Nap Timer

1. Hold the **NAP** button until the display changes to set the Nap Duration.
2. Press and release the + or - buttons to adjust the flashing values.
3. Press **NAP** again to confirm.


Start Nap Timer

- From the main screen, press the **NAP** button to start the nap countdown.
- Press any button except **SNOOZE/LIGHT** to turn off the Nap Timer.

USB Charging Port


There is a 1 Amp USB charging port on the side of your clock.

- Connect using your device's USB charging cable (not included) for the best results.
- Charging times will vary.
- USB Power Output: 1A maximum current.
- Charge 1A devices or devices that are self-regulating.
- The USB Charging Indicator will display a flashing lightning bolt when a device is charging, and a full battery when a device is fully charged.

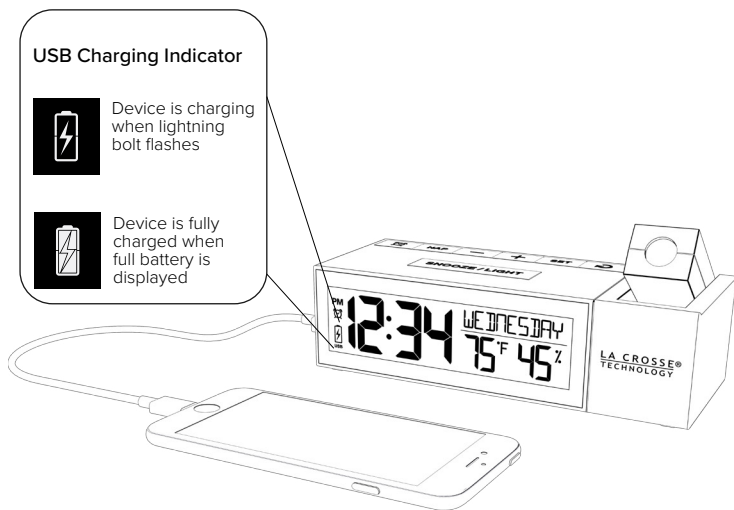

Fold Down Legs

For viewing at higher angles, try fully opening the Fold Down Legs on the bottom of the alarm clock.

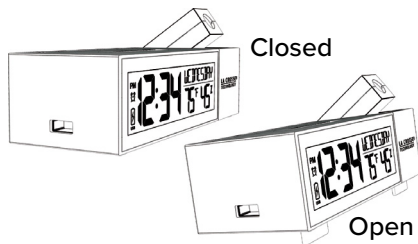

Specifications

Power: 5V Power Cord (HX075-0501200-AU-001)



Optional: 2 “AAA” batteries (not included) for backup.

The plug on the power adapter is intended to serve as the disconnect device, the socket-outlet shall be installed near the equipment and shall be easily accessible.

Indoor Temperature: 32°F to 122°F (0°C to 50°C)

Indoor Humidity: 10% RH to 99% RH

Dimensions: 6.52” L x 2.57” W x 1.84” H (16.56cm L x 6.52cm W x 4.67cm H)

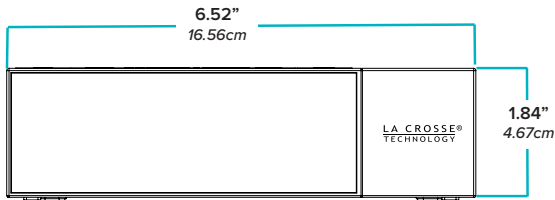

Stay in Touch!

Ask questions, watch setup videos, and provide feedback on our social media outlets. Follow La Crosse Technology on YouTube, Twitter, Facebook and Instagram.



We're Here to Help

If you require additional assistance, get in touch with our friendly customer support team based in La Crosse, WI.

Self Help: bit.ly/616-1950v2_support

Online: bit.ly/contact_techsupport

Phone: 1.608.782.1610

Our knowledgeable customer support team is available:
Mon-Fri 8am-6pm CT

SCAN HERE
Additional Info
and Support ▾



CA WARNING:

This product can expose you to chemicals including acrylonitrile, butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to: www.P65Warnings.ca.gov

Warranty & Patents

La Crosse Technology, Ltd. provides a **1-year limited time warranty** (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd.
2830 S. 26th St.
La Crosse, WI 54601

For Full Warranty Details, Visit:

www.lacrossetechnology.com/pages/warranty

Patents:

www.lacrossetechnology.com/pages/patents

Care & Maintenance

Battery Replacement Instructions

When batteries of different brand or type are used together, or new and old batteries are used together, some batteries may be over-discharged due to a difference of voltage or capacity. This can result in venting, leakage, and rupture and may cause personal injury.

- Always purchase the correct size and grade of battery most suitable for the intended use.
- Always replace the whole set of batteries at one time, taking care not to mix old and new ones, or batteries of different types.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries are installed correctly with regard to polarity (+ and -).
- Remove batteries from product during periods of non-use. Battery leakage can cause corrosion and damage to this product.
- Remove used batteries promptly.
- For recycling and disposal of batteries, and to protect the environment, please check the internet or your local phone directory for local recycling centers and/or follow local government regulations.

FCC Statment

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

LA CROSSE®
TECHNOLOGY