

Item#: **71655**  
**LED 4' SPEC-SELECT™ WRAP A-ROUND**  
 DIRECT LINEAR AMBIENT LUMINARIES

#### FEATURES

Spec-Select™ Wrap A-Rounds feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering
- Knockouts on each end

#### MOUNTING

Designed for surface or suspended chain mounting.

#### APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

#### ELECTRICAL

Wattage	30W / 35W / 40W
Voltage	120-277V
Current	0.33-0.14A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

#### LIGHTING PERFORMANCE

Lumens	3990 / 4655 / 5320
Lumens Per Watt (LPW)	133
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	7
R13 (Skin Tones)	82
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U3 - G1
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

#### ENVIRONMENT

Operating Temperature	-4 ~ 113°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

#### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

#### COMPONENTS

LED Light Source	Seoul 3528
Driver	SIP50-I850

#### CONSTRUCTION

Housing	Aluminum
Lens	Frosted
Base / Power Supply	Hard Wired
Finish	White

#### QUALIFICATIONS




Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **71655**  
**LED 4' SPEC-SELECT™ WRAP A-ROUND**

ITEM INFORMATION

**DIMENSIONS** (Inches)

Length	47.7"
Width	9.4"
Height	3.6"
Weight (Lbs)	--

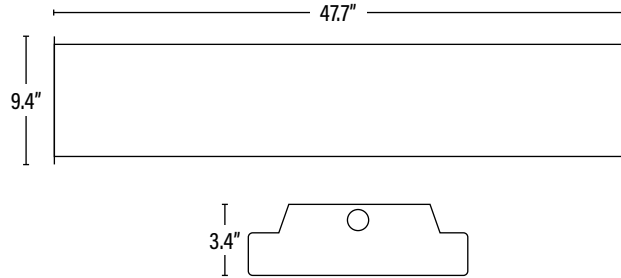

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	4	10811768022879	49" x 13.8" x 10.3"	36.4
Individual Box	1	811768022872	--	9.1
Country of Origin	Malaysia			
HS Tariff	9405.10.6020			

**ORDERING**

ITEM#	DESCRIPTION	CASE
71655	LED 4FT SPEC-SELECT™ WRAP A-ROUND/30-35-40W/35-50K/DIMM/120-277V - <b>DLC®</b>	4

**ACCESSORIES**

69845	LOW/HIGH BAY FIXTURE OCCUPANCY PIR SENSOR 30FT DIA, 8-40FT HEIGHT 800W/1200W - 120/277V	50
79845	LOW BAY BI-LEVEL AND DAYLIGHT HARVEST MICROWAVE SENSOR 48FT DIA, 8-20FT HEIGHT 800W/1200W - 120/277V	50
89845	360° HIGH BAY BI-LEVEL AND DAYLIGHT HARVEST MICROWAVE SENSOR 60FT DIA, 8-50FT HEIGHT 800W/1200W - 120/277V	50
49845	EXTENDER MOUNT FOR SENSOR 69845/79845/89845	100
09355	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN- SPLIT TYPE/L - <b>T20C</b>	1
19355	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN- SPLIT TYPE/L - <b>T20C</b>	1
29355	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN- SPLIT TYPE/L - <b>T20C</b>	1

**ADDITIONAL INFORMATION:**

- Default settings; 40W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

