

LA CROSSE[®] TECHNOLOGY



Wattz ⚡
3-in-1 projection alarm clock

- + projection alarm
- + wireless charger
- + temperature & humidity

SET UP GUIDE

MODEL NUMBER C80765

Table of Contents

BASICS		ALARM		PROJECTION	
Initial Setup	02	Setting the Alarm	07	Projection Brightness	09
Buttons	03	Activate/Deactivate	07	Adjusting the Projection	09
LCD Display	04	Snooze Duration	08	Projection Image Options	10
Ports	04				
LCD Display Brightness	05	CHARGING		ADD-ON SENSOR	
Auto-Dim Settings	05	Charging Your Devices	11	Purchase Information	13
Display Modes	06	Phone Compatibility	11	Add-On Sensor Setup	13
Display Mode Options	06	USB Charging Port	12	Lost Connection	14
MISC.		APPENDIX		SUPPORT	
Cable Organizer	12	Specifications	16	Support Information	19
Smart Watch Stand	15	Warranty	17	Trademarks & Info	19
Smart Watch Stand Storage	15	Recycling & Disposal	17	Stay in Touch	19
		Cautions/Statements	17-18		

BASICS

Initial Setup


Power Up

Insert the 5V Power Adapter into an outlet, and then plug it into the Power Jack on the bottom of the alarm clock.


A greeting will appear on the LCD display and then your clock will move into the Settings Menu.

Settings Menu Order


12/24 Format • Hour • Minutes • Year • Month • Date • Fahrenheit/Celsius • Beep On/Off



Use the +/- buttons on the top of the clock to adjust the values.



Tap the gear icon button to confirm selection and move to next step.





You may exit the Settings Menu at any time by tapping the **SNOOZE / BACKLIGHT** button.

Note: Weekday will set automatically after year, month, & date settings are adjusted.

BASICS

Buttons

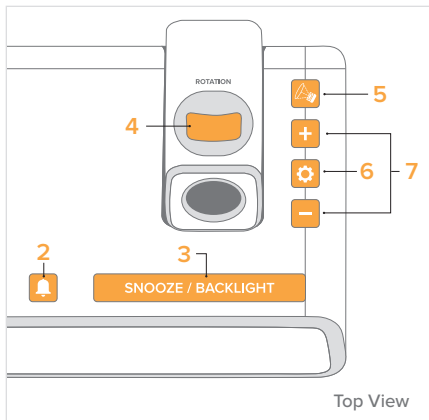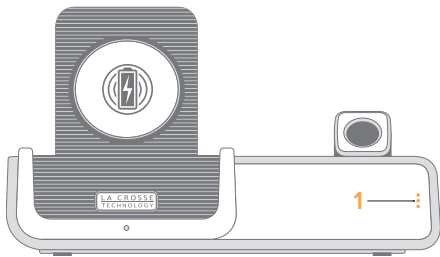

1. DISPLAY OPTION

Tap to select LCD display mode options

2. ALARM

Tap to activate/deactivate or hold to enter alarm settings

4. ROTATION WHEEL

Scroll to rotate the projection image (left or right)

5. PROJECTION

Tap to adjust projection intensity or hold to change projection mode*

7. PLUS/MINUS (+/-)

Tap to increase/decrease values, hold to change values quickly

3. SNOOZE/BACKLIGHT

Tap to snooze sounding alarm, adjust backlight, or hold for Auto-Dim Settings

6. SET

Hold to enter Settings Menu



*A sensor is required for additional projection options.


BASICS

LCD Display




Ports

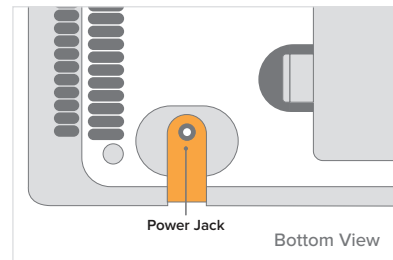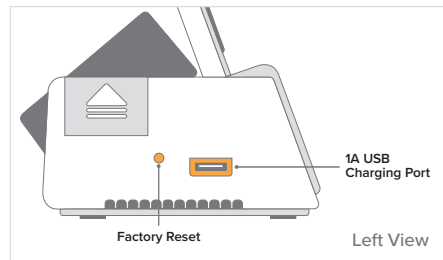

Note: To enter the Settings Menu after the initial setup, hold the  button on the top of the clock.

LCD Display Brightness



Adjusting the LCD Display Brightness

Tap the **SNOOZE/BACKLIGHT** button on the top of the clock to adjust the backlight intensity. There are 4 brightness levels, plus an off option.

Auto-Dim Settings


Program your LCD display to automatically dim during preselected times.

1. Hold the **SNOOZE/BACKLIGHT** button to enter the Auto-Dim Settings Menu.
2. Tap the **+/-** buttons to turn the Auto-Dim feature on or off. Tap **SNOOZE/BACKLIGHT** to confirm.
3. Tap the **+/-** buttons to adjust the starting hour. Tap **SNOOZE/BACKLIGHT** to confirm.
4. Tap the **+/-** buttons to adjust the stopping hour. Tap **SNOOZE/BACKLIGHT** to confirm and exit.




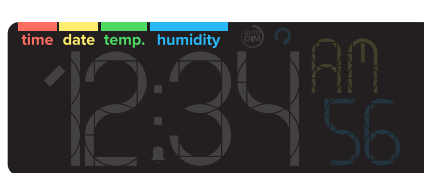
The  icon will appear on the LCD when activated.

Display Modes




Selecting the Display Mode

Tap the  button on the front of the clock to select a display mode or automatically cycle through all of the available options.



The Color Bars above the time on the LCD indicate the current display mode.



The  icon will appear on the LCD when the Cycle Mode is active. This setting will automatically toggle through the available display mode options.

Display Mode Options



AM/PM and
Seconds



Weekday
+ Date



Indoor
Temperature



Indoor
Humidity



Outdoor
Temperature*








Outdoor
Humidity*

*Outdoor data requires an add-on sensor (sold separately).
See page 13 for more information.

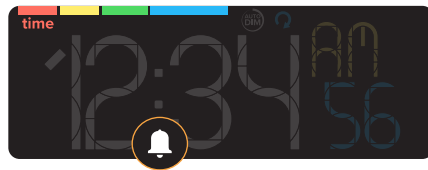Time Alarm



Setting the Alarm



1. Hold the  button on the top of the clock to enter the Alarm Settings Menu.
2. Use the \pm buttons to set your desired time. Tap  to confirm.
3. Next, use the \pm buttons to set your desired snooze duration (5 to 120 minutes). Tap  to confirm and exit the Alarm Settings Menu.
4. Your sound alarm is now activated, indicated by the  icon on the LCD.

Activating & Deactivating the Alarm




1. Tap the  button to activate/deactivate the alarm and to view your alarm time.
2. The  icon will appear on the LCD when the alarm is active.

Time Alarm

Crescendo Alarm

The alarm will increase in volume over a 2-minute period. After the 2-minute time frame, the alarm will stop if not snoozed or turned off.

Example:

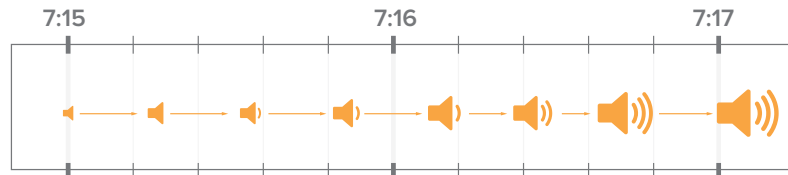

Based on 7:15am alarm time


Snooze Duration Countdown




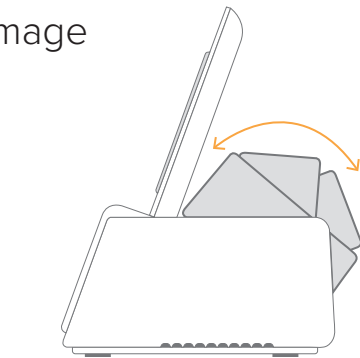
When your alarm sounds, tap the **SNOOZE/LIGHT** button to snooze your alarm for your preselected snooze duration. A countdown will appear on screen. When the snooze time reaches "00," the alarm will sound again. The snooze feature can be repeated as many times as desired.

PROJECTION


Adjusting the Projection Image

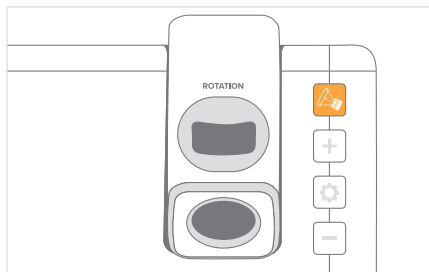

Tap the  button to adjust the projection's brightness (HI/LOW/OFF).



The Projection Arm tilts forwards and backwards to adjust the location of the projection image.



Use the Rotation Wheel on the top of the Projection Arm to rotate viewing angle of the image.




Note: The fixed focus projection image will look best at about 7ft. (2.1m).



PROJECTION

Projection Options

Projection Image Options

You can choose to see the (1) time, (2) outdoor temperature and humidity, or (3) cycle through both options (indicated by the  icon on the LCD). **Outdoor weather information is only available if an add-on sensor is connected.**

Selecting Your Projection Image

1. When an outdoor sensor is connected, hold the  button on the top of the clock to toggle between the projection options. If no sensor is connected, this button will only adjust the projection's brightness.
2. Time will be the default projection image. Hold and release the  button each time to switch between projection modes. The Color Bar on the display will indicate your current selection.



Current Time



Outdoor Temperature and Humidity



Time-Only Projection



Outdoor Temperature & Humidity-Only Projection



Cycle Through Both Options

Note: A sensor is required for outdoor information. If no sensor is connected, the projection will only show current time.

CHARGING

5W Wireless Charger

Charging your Qi-Enabled Phone

- Place your Qi-Enabled phone on the platform. Your phone should be centered and should sit flush to the charging cradle.
- The blue Charging Indicator Light below the platform will be solid when your phone is successfully charging.
- The light will flash slowly if your device is not positioned properly or if your device is not compatible with the Qi wireless charging technology. If this problem persists, try removing any large/bulky cases.



Phone Compatibility

Works with all Qi-Enabled phones, such as:

- iPhone X Series
- iPhone 8 Plus / 8
- Galaxy S8+ / S8
- Galaxy Note 8



Compatibility may vary based on phone model and/or case selection. This list is not comprehensive. Please check your phone's manual for details regarding Qi-Enabled capabilities.

CHARGING

USB Charging Port

There is a 1 Amp USB Charging Port located on the left side of your alarm clock.

- Connect your external device's USB charging cable (not included) into the USB Charging Port.
- Charging times may vary.
- USB Power Output: 1 Amp maximum current



Magnetic Cable Organizer

Use the included Cable Organizer to keep your charging cables neat and secure. The inset magnetic square on back of clock ensures a snug and secure fit.



ADD-ON SENSOR

Optional Add-On Sensor



You can purchase an add-on Thermo-Hygro Sensor to get real-time temperature and humidity data, straight from your backyard.



Purchase Your Add-On Sensor at (or scan QR Code):
www.lacrossetechnology.com/sensor-finder

Search for the compatible sensor using the alarm clock's model number (**C80765**).

Add-On Sensor Set Up

1. Insert 2 "AA" Batteries into the sensor battery compartment.
2. Hold the **+** button on the clock to search for the sensor.
3. Press the **TX** button inside the sensor battery compartment to transmit a signal.

The sensor's data should now be viewable on your LCD Display and/or as an option for your Projection Image.



Outdoor Temperature



Outdoor Humidity



Projection Image


ADD-ON SENSOR

Optional Add-On Sensor


Lost Connection

- If the sensor loses connection to the clock for any reason, the clock will show NO after 30 minutes of disconnection. This will appear in both the Outdoor Temperature & Humidity Display Modes.



- The Sensor Reception Icon  will disappear from the bottom right of the LCD and the clock will search for up to 3 minutes every hour to try to reestablish the connection.
- To manually reconnect, hold the **+** button on the top of the clock to search for the sensor.
- Dashes will show while searching for the sensor and the  icon will flash for up to 3 minutes or until the sensor is connected.

Low Battery


The  icon will appear when the sensor batteries need to be replaced.



Smart Watch Stand

The removable Smart Watch Stand is engineered to fit a variety of smart watch brands. Its open design allows for easy access to your device's unique charging port location, for use with the included USB Charging Port.

How to attach the Smart Watch Stand

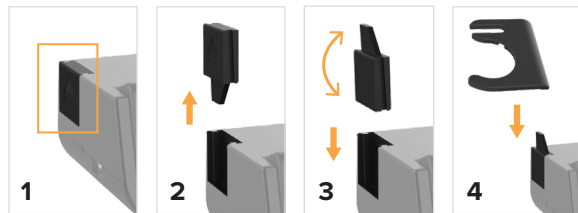


The open design fits
Apple Watch charger
(not included)

How to store the Smart Watch Stand

The Smart Watch Stand can be stored in the integrated storage compartment on the bottom of the clock when not in use.



Specifications

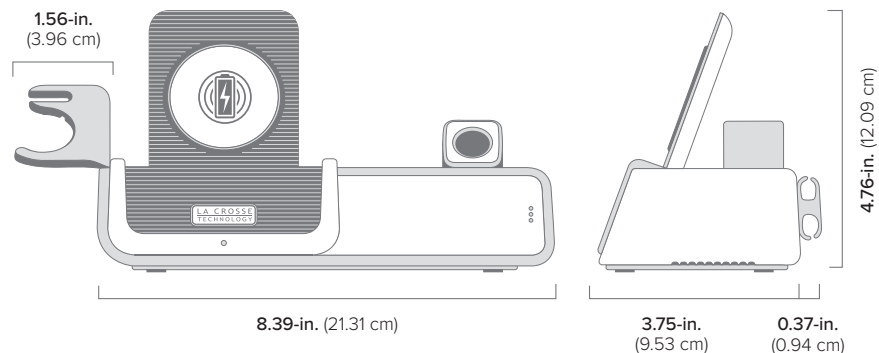

Power Requirements: 5.0V Power Cord
(Included) HX13-0502500-AU-001

Projection Brightness: 2 Intensity Levels + OFF

LCD Brightness: 4 Intensity Levels + OFF
(Programmable Auto-Dim Backlight Option)

Wireless Charger Power Output: 5 Watts

USB Charging Port: 1 Amp Maximum Current
(Charging Cord Not Included)

Programmable Snooze Duration:
5 to 120 Minutes

Indoor Temperature Range:
32°F to 122°F (0°C to 50°C)

Indoor Humidity Range: 10% to 99% RH

Settings Backup: The alarm clock will keep its settings for 6 minutes in the event it loses power.

Factory Reset: If you're experiencing issues with your station, use a pen or paper clip to press the factory reset button on the left side of your clock.

Warranty

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product, relating to manufacturing defects in materials and workmanship.

For full warranty details, you can visit: www.lacrossetechnology.com/support

La Crosse Technology, Ltd • 2830 S. 26th Street • La Crosse, WI 54601

Recycling & Disposal

Please consider the environment when deciding to dispose of this product. Although household electronics are generally safe to use on a daily basis, incorrect disposal can cause negative and potentially irreversible impacts on our environment.

Check with local donation centers to see if your product can be donated for future use. If disposal is the only option, federal agencies, local governments, and certified retailers may have electronic recycling programs in place. Programs may vary based on location.



Please Recycle

Caution!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Increase separation between equipment & receiver.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Canada Statement

This device complies with CNR Industry Canada license-exempt devices.

Operation is subject to the following two conditions:

(1) This device may not cause interference; and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

California Residents



WARNING:

This product can expose you to chemicals including styrene, which is known in the State of California to cause cancer.

For more information, go to: www.P65Warnings.ca.gov

Having Trouble? We're here to help.

For detailed product videos, manuals, and more, visit our support website:
www.lacrossetechnology.com/support

Make sure you have your product's model number handy (**C80765**)

If you need additional support, get in touch with our friendly customer support team:

Online: bit.ly/contact_techsupport

Phone Number: **1.877.408.2678**

Representatives are available Monday-Friday, 8:00am to 6:00pm CST

Trademarks & Warning

La Crosse Technology is not responsible for any damage or loss of performance with iPhone, iPod, or iPad while being used in associated with this accessory.

Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone, iPod, or iPad may affect wireless performance.

Apple, the Apple logo, iPad, iPhone, iPod, iPod touch, iTunes, Retina, Mac, Mac OS and OS X are trademarks of Apple Inc., registered in the U.S. and other countries.

Other company names and product names including Samsung, Galaxy, and Note are registered trademarks or trademarks of the respective companies.

Phone, charging accessories, and smart watch not included.



WARNING: CHOKING HAZARD—Small Parts

Not for children under 3 yrs.

Stay in Touch

Ask questions, watch set up videos, and provide feedback on our social media outlets.



Follow La Crosse Technology on Youtube, Facebook, Twitter, and Instagram.