LA CROSSE® TECHNOLOGY

WIRELESS **TEMPERATURE & HUMIDITY STATION COMBO PACK**
QUICK START GUIDE

Models: 308-1415TH | TX141TH-Bv2 | 308-1409TH
DC: 060818

FIND FULL MANUALS, FAQS, AND MORE UNDER THE **SUPPORT** TAB HERE: http://bit.ly/m82738

POWER UP

1. Insert 2-AA batteries into your Outdoor Sensor.
2. Insert the 5 volt power cord into an outlet, then into your Color Display. Optional: Insert 2-AA batteries for backup.
3. Insert 2-AAA batteries into your Mini Display.
4. Adjust time and date settings on each display.
5. Once the Outdoor Sensor is reading to each of your displays, place it outside in a shaded location.

Watch sensor mounting video: http://bit.ly/TH_SensorMounting



Outdoor Sensor TX141TH-Bv2



Color Display 308-1415TH



Mini Display 308-1409TH

COLOR DISPLAY 308-1415TH

SETTINGS

1. Hold the SET button to enter the Settings Menu.
2. Press the + or - button to adjust the values. Hold to adjust quickly.
3. Press the SET button to confirm and move to the next item.
4. Press the LIGHT button to exit.

Settings Menu Order:

- Language (English, Spanish, French)
- Beep ON/OFF
- 12/24 Hour
- Hour
- Minutes
- Year
- Month
- Date
- Fahrenheit or Celsius

Note: Your weekday will set automatically after year, month, and date are set.

COLOR DISPLAY BUTTON FUNCTIONS

SET button: Hold to enter Settings Menu.

MINUS button:
- Press to decrease values in Settings Menu.
- While viewing HI/LO records, hold to reset individual records to current reading, time & date.

PLUS button:
- Press to view Outdoor & Indoor HI/LO Temperature & Humidity records with time and date.
- Press to increase values in Settings Menu.
- Hold to search for Outdoor Sensor.

LIGHT button:
- Press to adjust backlight 4 levels & OFF.
- While in the Settings Menu, press to exit.
- Hold to set Auto Dim (backlight) times & turn the Auto Dim ON or OFF.

AUTO DIM BACKLIGHT

1. Hold the LIGHT button to enter the Auto Dim settings.
2. Use the + or - button to turn the Auto Dim feature ON or OFF. Press the LIGHT button to confirm.
3. If ON was selected, START will flash on screen. Use the + or - buttons to adjust your Auto Dimmer's starting hour. Press the LIGHT button to confirm.
4. STOP TIME will then begin to flash. Use the + or - buttons to adjust your Auto Dimmer's ending hour. Press the LIGHT button to confirm and exit.

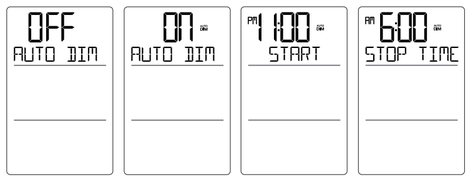

The words AUTO DIM will show in the date area when this feature is active.

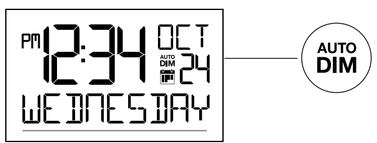

MINI DISPLAY 308-1409TH

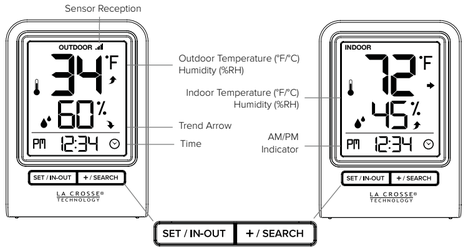

SETTINGS

1. Hold the SET/IN-OUT button to enter the Settings Menu.
2. Press and release SET/IN-OUT button to confirm and move to next item or exit.
3. Press and release +/SEARCH button to increase values. Hold +/Search to adjust quickly.

Settings Menu Order:

- 12/24 Hour
- Hour
- Minutes
- Fahrenheit or Celsius

MINI DISPLAY BUTTON FUNCTIONS

Hold SET/IN-OUT button: To enter Settings Menu.

Press SET/IN-OUT button: To change display from Outdoor Temperature & Humidity to Indoor Temperature and Humidity.

Hold +/SEARCH button: To search for the Outdoor Sensor.

Press +/SEARCH button: To increase the values in the Settings Menu.

Outdoor
Temperature & Humidity

Indoor
Temperature & Humidity

SENSOR WEATHER SHIELD-Not Included

The Sensor Weather Shield is designed to protect your outdoor sensor from rain and snow. This shield will offer limited protection from the sun's heat.
Purchase at: http://bit.ly/925-1418

LOW BATTERY INDICATORS

- If a low battery icon is displayed in the Outdoor Temperature section, replace batteries in the sensor.
- If a low battery icon is displayed in the Indoor Temperature section, or next to the Time, replace batteries in your station.

WE'RE HERE TO HELP!

If you require additional support, call our friendly customer support representatives based out of our office in La Crosse, Wisconsin.

Phone: 1.608.782.1610
Our knowledgeable customer support team is available:
Monday-Friday, 8am-6pm CST.

JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!

⚠ WARNING: This product can expose you to chemicals including styrene, which is known in the State of California to cause cancer. For more information go to: www.P65Warnings.ca.gov

CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not to be used for an extended period.
- Promptly remove expired batteries.

SPECIFICATIONS

Indoor:
Temperature Range: 32°F to 122°F (0°C to 50°C)
Humidity Range: 10% to 99% RH

Outdoor:
Temperature Range: -40°F to 140°F (-40°C to 60°C)
Humidity Range: 10% to 99% RH
Transmission Range: over 330 feet (100 meters) in open air RF 433MHz

Power Requirements:
308-1415TH: AC6: GPU280500150WA00 (required)
Optional: 2 "AA" LR6 Batteries (not included)
308-1409TH: 2 "AAA" LR3 Batteries (not included)
TX141TH-Bv2: 2 "AA" LR6 Batteries (not included)

Battery Life:
308-1415TH: over 24 months with reputable batteries
308-1409TH: over 24 months with reputable batteries
TX141TH-Bv2: over 24 months with reputable batteries

Dimensions:
308-1415TH: 3.24" L x 2.16" W x 5.98" H (8.23cm L x 5.48cm W x 15.19cm H)
308-1409TH: 2.64" L x 1.32" W x 3.62" H (6.7cm L x 3.35cm W x 9.19cm H)
TX141TH-Bv2: 1.57" L x 0.82" W x 5.11" H (3.98cm L x 2.08cm W x 12.98cm H)

WARRANTY INFO

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

For Full Warranty Details, Visit: www.lacrossetechnology.com/support

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Increase separation between equipment & receiver.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!
The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

CANADA STATEMENT

This device complies with CNR Industry Canada license -exempt devices. Operation is subject to the following two conditions:
(1) This device may not cause interference; and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.