



Item#: **80755**
BI-LEVEL DIMMING SENSOR
 LED HL LINEAR HIGH BAY ACCESSORY



FEATURES

- Slim, low-profile design.
- Low voltage external power supply.
- Remote required for additional programming
 Item:#55709 (Sold Separately)

APPLICATION

Sensor is designed for use with select LED HL Linear High Bays.

COVERAGE AREA

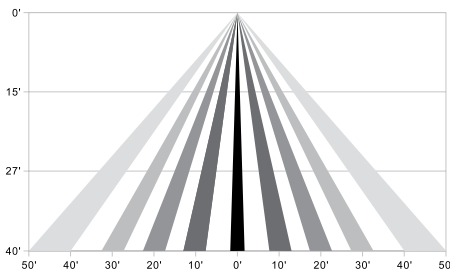

ELECTRICAL

Input Voltage	12V DC
Power consumption	0.1W

PERFORMANCE

Detection Diameter	100FT Max.
Max Mounting Height	40FT Max.
Dimmable Lighting Control	0-10V

ENVIRONMENT

Operating Temperature	-30° ~ 131°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Warranty (Years)	5
------------------	----------

CONSTRUCTION

Housing	PC
Finish	White

QUALIFICATIONS



Specifications are subject to change without notice.


Item#: **80755**
BI-LEVEL DIMMING SENSOR

DIMENSIONS (Inches)

Length (MOL)	1.7"
Width/Diameter (MOD)	2.2"
Weight (Lbs)	--

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

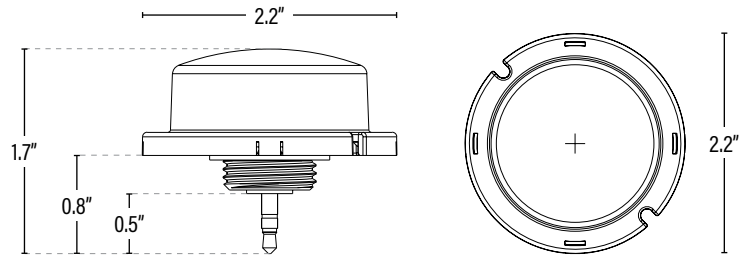

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	56	10811768029915	--	--
Individual Box	1	811768029918	--	--
Country of Origin	China			
HS Tariff	--			

ORDERING

ITEM#	DESCRIPTION	CASE
80755	PHOTO/MICROWAVE BI-LEVEL DIMMING SENSOR FOR POWER-SELECT™ HB	56

ACCESSORIES


90755	REMOTE CONTROL FOR PHOTO/MICROWAVE MOTION SENSOR	1
-------	--	---

ADDITIONAL INFORMATION:

Factory Default Settings:

- Trim Level: 100%
- Sensitivity: Hight
- Hold Time: 5 min.
- Stand-by Dim: 50%
- Stand-by Time: 30min.
- Photocell: Off

SENSOR SOCKET (Pre-installed in fixture)

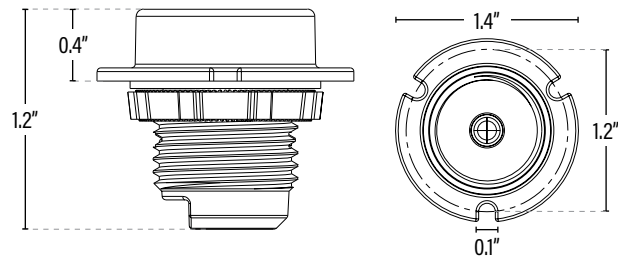

ITEM INFORMATION