



Item#: **85738**  
**LED CEILING LIGHT**  
 INDOOR FIXTURE

#### FEATURES

- Diffusing lens provides glare free illumination and even light distribution.
- Designed with the lasted solid state lighting and electronic driver for optimal performance and energy efficiency.
- Die formed cold rolled steel mounting plate; painted with a treatment for anti-corrosion.

#### APPLICATION

Homes, schools, retail, office and hospitality.

#### ELECTRICAL

Wattage	25W
Voltage	120V
Current	0.23A
Power Factor	0.8
Total Harmonic Distortion (THD)	N/A

#### LIGHTING PERFORMANCE

Lumens	1700
Lumens Per Watt (LPW)	68
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	Type VS
Dimmable Lighting Control	<i>Dimmable</i> 120V Dimming

#### ENVIRONMENT

Operating Temperature	-4° ~ 104°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP20

#### LIFESPAN

Average Life (Hours)	35,000
Warranty (Years)	<b>3</b>

#### COMPONENTS

LED Light Source	Samsung SPMWHx228F
Driver	837566 - 25W320MAC

#### CONSTRUCTION

Housing	C.R.S. / PC
Base / Power Supply	Hard Wired
Finish	White

#### QUALIFICATIONS




Visit [www.energystar.gov](http://www.energystar.gov) to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **83758**  
**LED CEILING LIGHT**

**DIMENSIONS** (Inches)

Length	12.8"
Width	12.8"
Height	3.5"
Net Weight (Lbs)	--

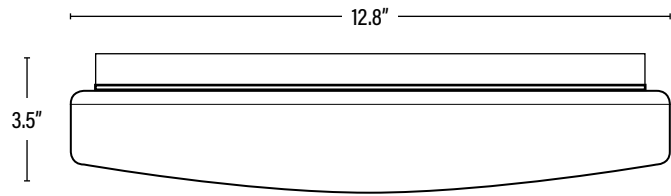

**PACKAGING**

		<b>UPC</b>	<b>DIMENSIONS</b> (LxWxH)	<b>GROSS WEIGHT</b> (Lbs)
Master Carton	5	10811768029021	20.6" x 15.2" x 15.6"	--
Individual Box	1	811768029024	14.4" x 3.9" x 14.5"	--
Country of Origin	China			
HS Tariff	9405.10.6020			