



Item#: **88838**
LED SURFACE MOUNT
 LUMINARIES FOR COMMERCIAL
 AND RESIDENTIAL BUILDINGS


FEATURES

- LED surface mount fixture provides glare free illumination and even light distribution with a clean, modern look.
- Diffusing lens
- Low profile design
- Easy installation for both J-box. *Not compatible for installation in recessed cans.*

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, hallways, lobbies and other residential and commercial applications.

LIGHT DISTRIBUTION CURVE

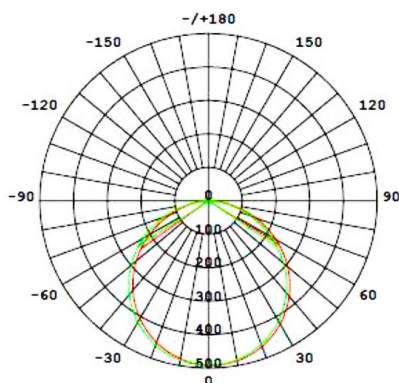

ELECTRICAL

Wattage	20W
Voltage	120V
Current	174mA
Power Factor	0.9
Total Harmonic Distortion (THD)	71

LIGHTING PERFORMANCE

Lumens	1200
Lumens Per Watt (LPW)	60
Color Temperature (CCT)	3000K
Color Rendering (CRI)	92
R9 (Red Value)	58
R13 (Skin Tones)	N/A
Beam Angle	112°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B1 - UX - G0
Dimmable Lighting Control	<i>Dimmable</i> see compatibility report

ENVIRONMENT

Operating Temperature	-22° ~ 104°F
Suitable Location	WET Indoor / Covered Ceilings
Ingress Protection Rating	IP54

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Smalite 2835
------------------	--------------

CONSTRUCTION



Housing	PC
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS



Visit www.energystar.gov to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **88838**
LED SURFACE MOUNT



DIMENSIONS (Inches)

Width/Diameter (MOD)	9"
Height	1"
Net Weight (Lbs)	--

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768029700	19.4" x 13.4" x 11"	15.3
Individual Box	1	811768029703	9.3" x 2.4" x 9.4"	1.5
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
88838	LED 9IN DESIGNER SURFACE MOUNT/20W/30K/DIMM/120V/WHT/ROUND - ENERGY STAR®	10

ADDITIONAL INFORMATION: Family

Item(s): 09838/4000K

- Not compatible for installation in recessed cans.